MILITARY SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, 41, 66, 114 CONTACT POSITIONS: FOR PRINTED WIRING BOARDS (.100 X .050 OFFSET GRID)

Ⓑ Inactive for new design after 1 July 1989

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

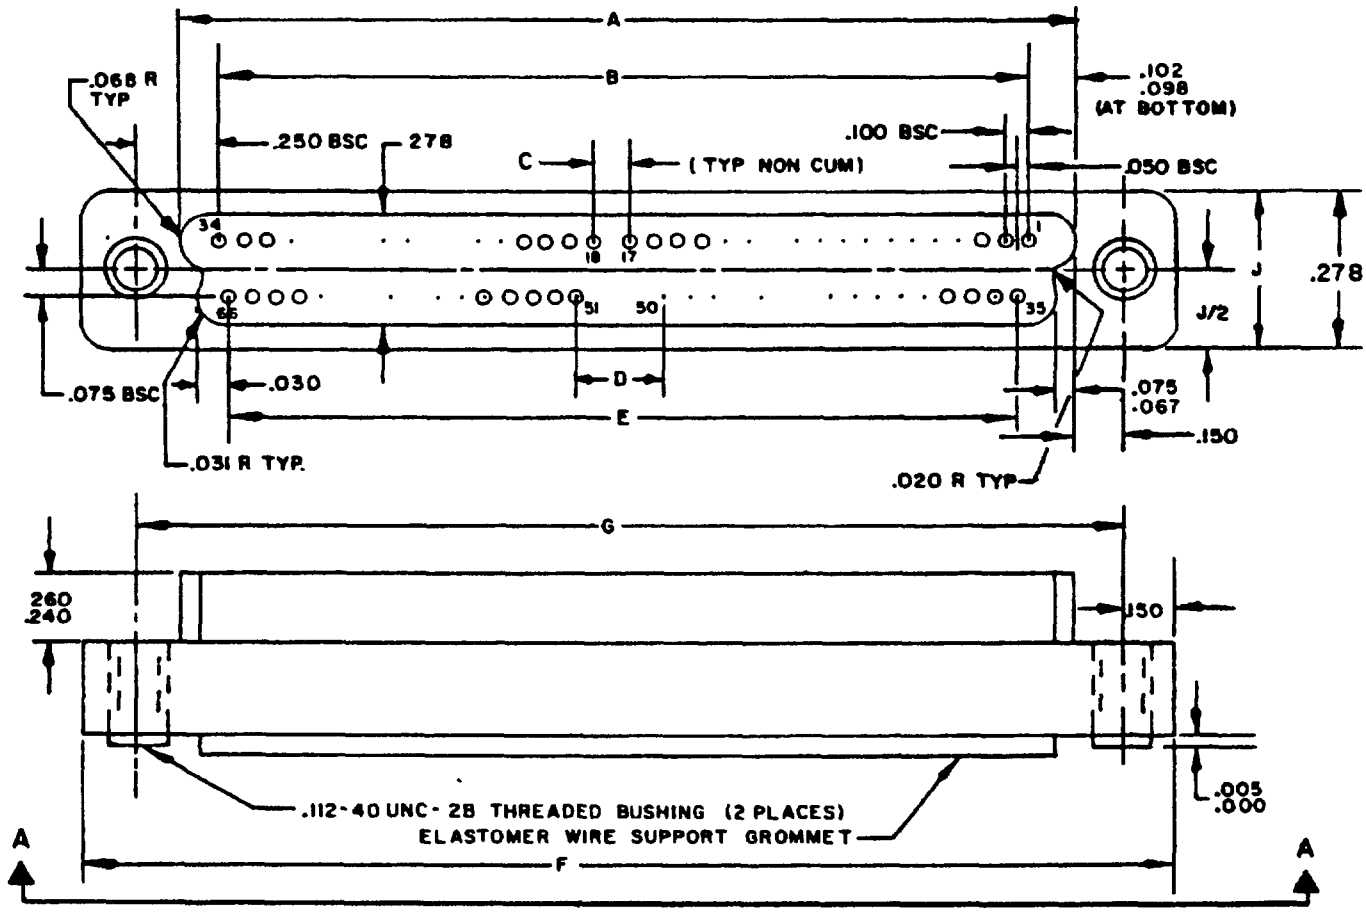
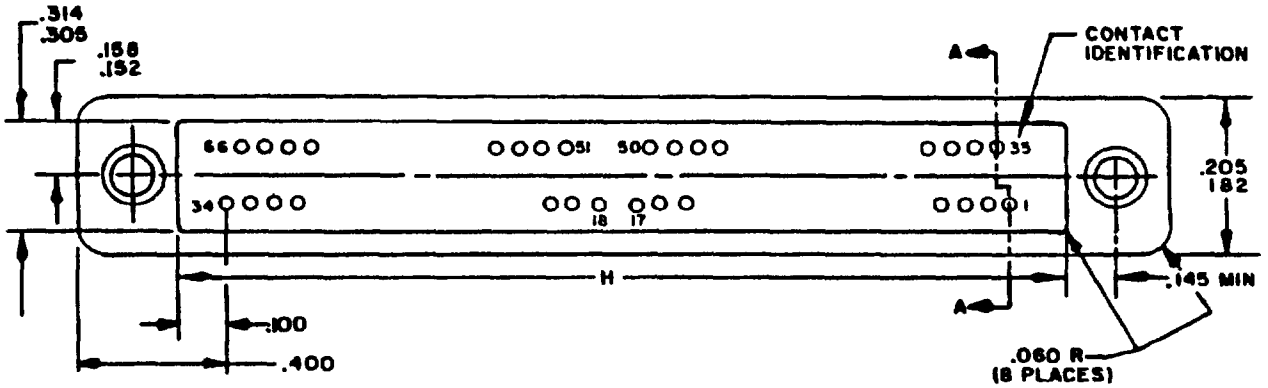



FIGURE 1. Connectors, receptacle (.100 x .050 offset grid).

Ⓑ denotes change


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

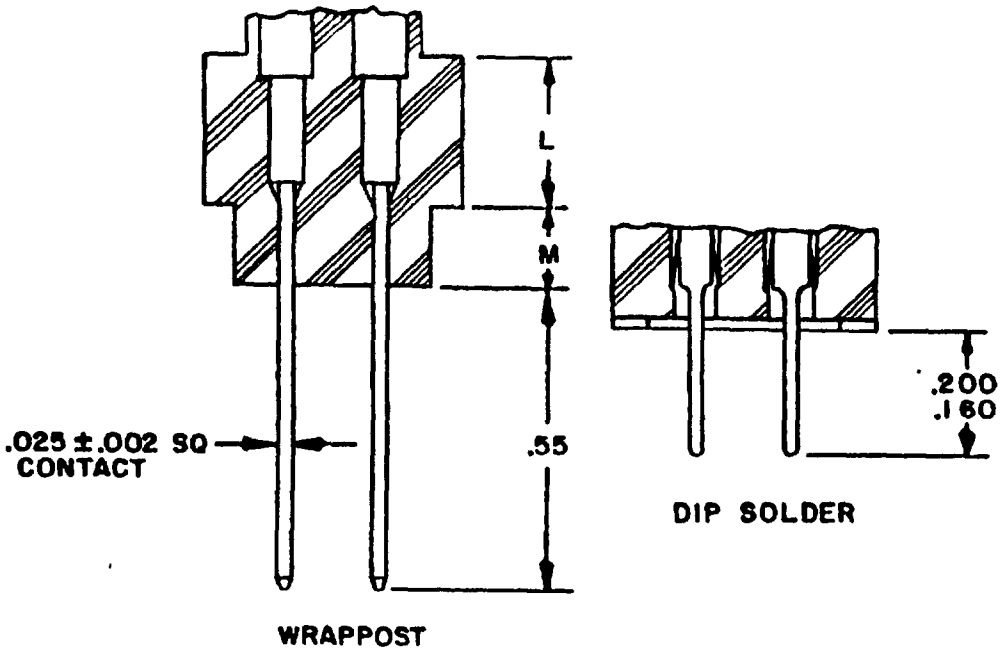


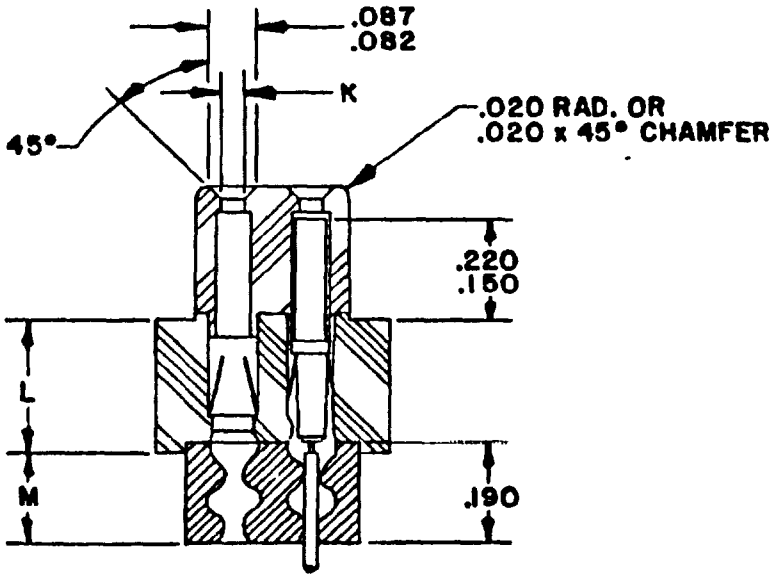

VIEW A-A

FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.




SECTION A-A

FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .075 | 1.91 | .190 | 4.83 | .500 | 12.70 |
| .007 | 0.18 | .076 | 1.93 | .195 | 4.95 | .52 | 13.2 |
| .010 | 0.25 | .082 | 2.08 | .200 | 5.08 | 1.900 | 48.26 |
| .015 | 0.38 | .087 | 2.21 | .205 | 5.21 | 2.000 | 50.80 |
| .020 | 0.51 | .098 | 2.49 | .210 | 5.33 | 2.200 | 55.88 |
| .025 | 0.64 | .100 | 2.54 | .211 | 5.36 | 2.500 | 63.50 |
| .030 | 0.72 | .102 | 2.59 | .240 | 6.10 | 2.80 | 71.12 |
| .031 | 0.79 | .112 | 2.84 | .250 | 6.35 | 3.400 | 86.36 |
| .032 | 0.81 | .129 | 3.28 | .260 | 6.60 | 3.500 | 88.90 |
| .041 | 1.04 | .130 | 3.30 | .278 | 7.06 | 3.700 | 93.98 |
| .042 | 1.07 | .145 | 3.68 | .280 | 7.11 | 4.000 | 101.60 |
| .044 | 1.12 | .148 | 3.76 | .300 | 7.62 | 4.300 | 109.22 |
| .046 | 1.68 | .150 | 3.81 | .310 | 7.87 | 5.900 | 149.86 |
| .050 | 1.27 | .152 | 3.86 | .314 | 7.98 | 6.000 | 152.40 |
| .060 | 1.52 | .154 | 3.91 | .400 | 10.16 | 6.200 | 157.48 |
| .067 | 1.70 | .158 | 4.01 | .415 | 10.54 | 6.500 | 165.10 |
| .068 | 1.73 | .160 | 4.06 | .450 | 11.43 | 6.800 | 172.72 |
| .074 | 1.88 | .170 | 4.32 | | | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals, ±.02 (0.5 mm) for two place decimals, and ±2° on angles.
4. These connectors mate with connectors in accordance with MIL-C-55302/83.
5. Unless otherwise specified, contacts are shipped loose in a plastic bag.

FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, contacts, and dimensions.

| Dash number | Number of contacts | Type of termination | Type of contact M55302/84 | Number of contacts supplied | Dimensions | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | A | B | C | D | E | F | G | H ±.005 -.010 | J | K | L | M |
| -01 | 66 | Crimp removable | 01 | 0 | 3 700 | 3.500 | 300 | 400 | 3.400 | 4.300 ±.007 | 4.000 | 3.700 | .415 | .044 | 250 | .17 |
| -02 | 66 | Dip solder | 03 | 0 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -03 | 66 | Solder turret | 04 | 0 | " | " | " | " | " | " | " | 3 700 | " | " | " | .17 |
| -04 | 66 | Wrappost | 05 | 0 | " | " | " | " | " | " | " | " | " | " | " | 129 ±.007 |
| -05 | 66 | Crimp removable | 02 | 0 | " | " | " | " | " | " | " | " | " | " | " | 17 |
| -06 | 66 | Crimp removable | 01 | 66 | " | " | " | " | " | " | " | " | " | " | " | " |
| -07 | 66 | Crimp removable | 02 | 66 | " | " | " | " | " | " | " | " | " | " | " | " |
| -08 | 66 | Dip solder | 03 | 66 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -09 | 66 | Solder turret | 04 | 66 | " | " | " | " | " | " | " | 3.700 | " | " | " | 17 |
| -10 | 66 | Wrappost | 05 | 66 | " | " | " | " | " | " | " | 3 700 | " | " | " | 129 ±.007 |
| -11 | 41 | Crimp removable | 01 | 0 | 2.200 | 2 000 | N/A | N/A | 1.900 | 2.800 | 2.500 | 2.200 | " | " | " | 17 |
| -12 | 41 | Crimp removable | 02 | 0 | " | " | " | " | " | " | " | 2.200 | " | " | " | 17 |
| -13 | 41 | Dip solder | 03 | 0 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -14 | 41 | Crimp removable | 04 | 0 | " | " | " | " | " | " | " | 2.200 | " | " | " | 17 |
| -15 | 41 | Crimp removable | 01 | 41 | " | " | " | " | " | " | " | " | " | " | " | " |
| -16 | 41 | Crimp removable | 02 | 41 | " | " | " | " | " | " | " | " | " | " | " | " |
| -17 | 41 | Dip solder | 03 | 41 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -18 | 41 | Solder turret | 04 | 41 | " | " | " | " | " | " | " | 2.200 | " | " | " | 17 |
| -19 | 114 | Crimp removable | 01 | 0 | 6.200 | 6.000 | .400 | .500 | 5.900 | 6.800 ± 015 | 6.500 | 6.200 | .450 ±.010 -.005 | .041 | 280 | 16 |
| -20 | 114 | Crimp removable | 02 | 0 | " | " | " | " | " | " | " | 6 200 | " | " | " | 16 |
| -21 | 114 | Dip solder | 03 | 0 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -22 | 114 | Solder turret | 04 | 0 | " | " | " | " | " | " | " | 6 200 | " | " | " | 16 |
| -23 | 114 | Wrappost | 06 | 0 | " | " | " | " | " | " | " | " | " | " | " | " |
| -24 | 114 | Crimp removable | 01 | 114 | " | " | " | " | " | " | " | " | " | " | " | " |
| -25 | 114 | Crimp removable | 02 | 114 | " | " | " | " | " | " | " | " | " | " | " | " |
| -26 | 114 | Dip solder | 03 | 114 | " | " | " | " | " | " | " | N/A | " | " | " | N/A |
| -27 | 114 | Solder turret | 04 | 114 | " | " | " | " | " | " | " | 6.200 | " | " | " | .16 |
| -28 | 114 | Wrappost | 06 | 114 | " | " | " | " | " | " | " | 6.200 | " | " | " | .16 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material.

Insulators: In accordance with MIL-C-55302.

Contact retention clips. Beryllium copper in accordance with QQ-C-533.

Wire support: Elastomer in accordance with MIL-R-3065.

Mounting bushings: Stainless steel in accordance with QQ-S-763, series 300.

Contact identification: See figure 1 and table I.

Mating and unmating: The maximum mating force shall be the average mating force measured in five engagements and shall not exceed .5 times the number of contacts in pounds.

Contact resistance: The potential drop across a mated contact at 3.0 amperes test current shall not exceed 25 millivolts, and after corrosion test shall not exceed 30 millivolts.

Dielectric withstanding voltage:

Sea level: 1500 V ac (rms) test.

50,000 feet altitude: 500 V ac (rms) test.

Current rating: 3.0 amperes maximum per contact. 2.25 amperes continuous per contact per connector at room ambient.

Contact: See table I.

Keying plug: M55302/85.

Insertion and removal tool: M81969/10-01 and M81969/10-02.

Crimp tool: Hand crimp tool in accordance with M22520/1.

Part number. M55302/82-(dash number from table I).

Ⓑ Required testing limited to group A tests only. Qualification requirements are not applicable.

## CONCLUDING MATERIAL

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity.
Air Force - 17

Agent:
DLA - ES

(Project 5935-F344-2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.