MIL-B-49450/6A(ER)
19 July 1988
SUPERSEDING
MIL-B-49450/6(ER)
16 January 1987

MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT,
BB-716/A, LOW CAPACITY CELL

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense,

The complete requirements for acquiring the low capacity cell described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49450(ER).

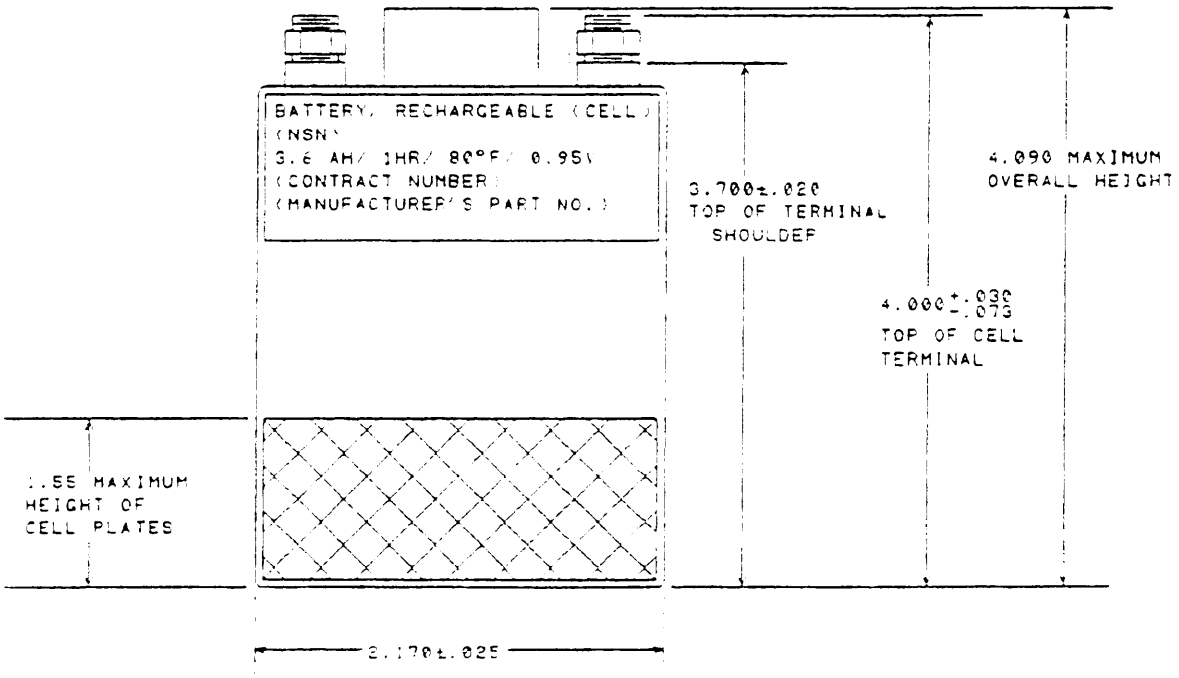


Figure 1. Dimensions and Markings of Cell.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

DRAWINGS NOTES:

1. All dimensions shown in figure are in inches, unless specified otherwise.

2. Cell vent shall be in accordance with MIL-B-49450/4(ER).

3. The cell shall use two threaded stud type terminals, The stud terminals shall have 10-32 threading and shall be UNF-2A, Grade 1018 or L1018 cold rolled steel per AMS-5069, ASTM-A-108 with M212 finish per MIL-F-14072.

Alternate: The stud terminals shall have 10-32 threading and shall be UNF-2A, Grade 12L14 cold finished carbon steel, free machining per QQ-S-637 with M313 finish per MIL-F-14072 (QQ-N-290 Grade E, without copper flash).

4. Per stud terminal - 10-32, 5/16 inch hexagonal nuts and one Belleville spring in accordance with MIL-B-49450/3(ER).

5. The entire cell top shall be permanently dyed black.

6. Position of the cell label is optional.

7. Baffle position shall be located such that the requirements of 3.4.9.2 are met.

8. The manufacturer's name or symbol shall be added to the cell cover as shown by embossing or equivalent letter size shall be 3/32 ± 1/32 inch.

9.Design of cell vent chimney is optional and can be as shown in Figure 2 of MIL-B-49459/6(ER) or Figure 3 of MIL-B-49459/7(ER).

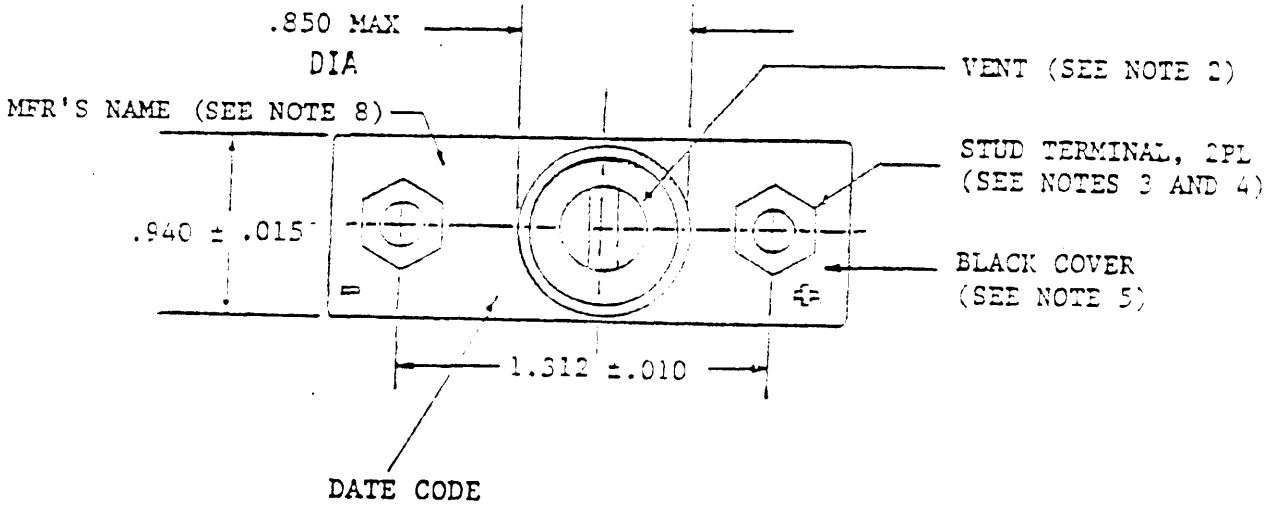


FIGURE 2. TOP VIEW OF CELL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Nomenclature: Battery, Rechargeable, Cell
Rated Capacity: 3.6 ampere-hours
Voltage (Nominal): 1.2 volts

TEST	DISCHARGE RATE (Amps)	CUT-OFF VOLTAGE (V)	CAPACITY (AH) Minimum	Maximum
Capacity	5.5	0.95	3.6	4.4
Cycle Life				
Normal Rate	5.5	0.95	3.0	4.4
High Rate	55.0	0.60	1.83 1/	---
Vibration	1.1	1.00	3.6	---
Temperature Shock	5.5	0.95	3.6	---
Altitude	5.5	0.95	2.8	---
Humidity and Charges Retention	5.5	0.95	2.4	3.7
High Rate Discharge and Low Temperature	55.0	0.50	1.6	---
High Rate Discharge and operating position	55.0	0.50	2.3	3.7

NOTE: 1/ Discharge on cycling test limited to 2 minutes.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing Activity:
Army-ER

(Project 6140-A682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.