MILITARY SPECIFICATION


RESISTORS, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RM0805 (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RM0805, fixed, film, chip resistors. This style is available in all characteristics, resistance tolerances .1, 1, 2, 5, and 10 percent and all termination materials except termination P.

* 1.2 Military part number. Chip resistors covered by this specification shall be identified by a military part number which shall consist of the basic number of this specification and a coded dash number. The military part number shall be in the following form:



The coded dash number shall be derived in accordance with MIL-R-55342.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications. The following specifications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-R-39032 - Resistors, Packaging of.
MIL-R-55342 - Resistors, Fixed, Film, Chip, Established Reliability, General Specification for.


(Copies of the specifications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Laboratory Command, ATTN: SLCET-R-S, Fort Monmouth, NJ 07703-5302, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:19:22
Check the source to verify that this is the current version before use.

CONFIGURATION A

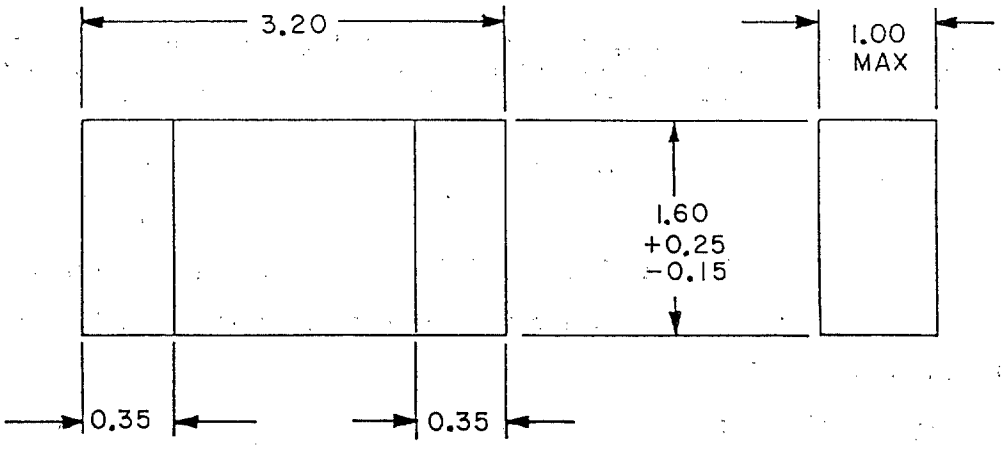


mm	Inches
0.15	.006
0.25	.010
0.35	.014
0.40	.016
0.50	.020
1.00	.039
1.60	.063
3.20	.126
3.45	.136

NOTES:
1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerances are ±0.15 mm (.006 inch).
3. The pictorial view of the styles above are given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope, and do not alter the functional aspects of the device are acceptable.
4. Configuration B covers termination materials S, W, D and T.
5. Inch equivalents are given for general information only.

FIGURE 1. Style 0805.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.

CONFIGURATION B

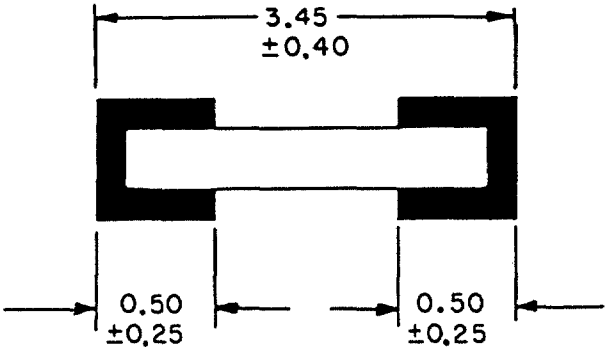

NOTE: Covers termination materials C, U and B which are wraparound terminations. All dimensions are the same as those of configuration A except as shown above.

FIGURE 1. Style 0805 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-R-55342 and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1, as applicable.

3.3 Power rating. The power rating for characteristics K and M shall be 250 milliwatts. For characteristics H and E, the power rating shall be 125 milliwatts.

3.4 Voltage rating. The maximum continuous working voltage shall not exceed 100 volts.

3.5 Resistance. Minimum and maximum resistance values shall be as follows:

Resistance tolerance	Minimum resistance	Maximum resistance characteristic	
		K and M	H
(±0.1%)	100 ohms	300,000 ohms	500,000 ohms
(±1%)	1.0 ohms	499,000 ohms	1,000,000 ohms
(±2%)	1.0 ohms	1,000,000 ohms	1,000,000 ohms
(±5%)	10.0 ohms	1,000,000 ohms	5,100,000 ohms
(±10%)	5.6 ohms	1,000,000 ohms	5,600,000 ohms

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-R-55342.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39032.

6. NOTES

6.1 Notes. The notes specified in MIL-R-55342 are applicable to this specification.

6.2 Dimensions for wraparound termination. The larger dimensions for the wraparound type termination is intended to accommodate the termination, metalization, and pretinning material.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1090-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-R-55342/7	Resistors, Fixed, Film, Chip, Established Reliability Style RM0805 (Metric)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 92 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.