MIL-P-62071/1C(AT)
19 April 1977
SUPERSEDING
MIL-P-62071/1B(AT)
5 April 1976

MILITARY SPECIFICATION SHEET

POWER SUPPLY: HIGH VOLTAGE, SOLID STATE 24 VOLTS, DIRECT CURRENT

This specification sheet is approved for use by the U.S. Army Tank-Automotive Materiel Readiness Command, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the power supply described herein shall consist of this document and the latest issue of specification MIL-P-62071(AT).

REQUIREMENTS:

Dimension and configuration: See figure 1.

Connectors and mounting dimensions: See figure 1.

Part number: M62071/1-1.

NOTE: Tabulation of metric equivalents of overall and mounting dimensions in table I is for use when the power supply is installed in a system of metric design.

Custodian:
Army - AT

Preparing activity:
Army - AT


Project No. 2590-A159

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: (US Army Tank-Automotive Materiel Readiness Command, ATTN: DRSTA-GSS, Warren 48090) by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

©denotes changes

FSC-2590

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:14Z
Check the source to verify that this is the current version before use.

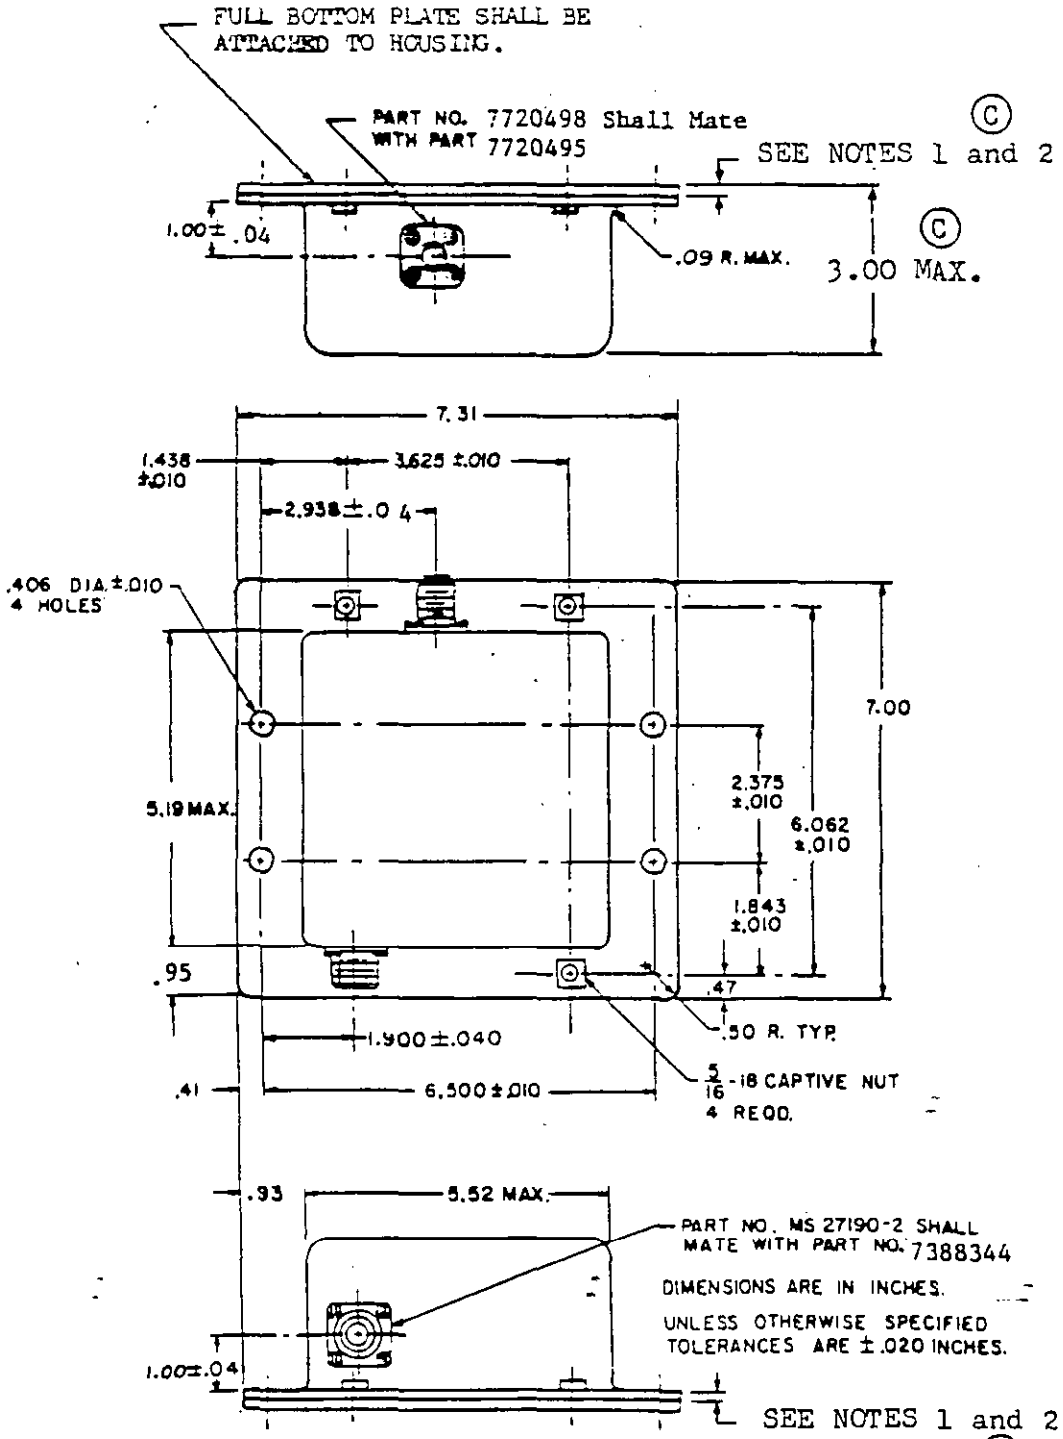

NOTES:
1. Thickness of aluminum material shall be 0.10 min.
2. Thickness of steel material shall be 0.062 min.

FIGURE 1 - POWER SUPPLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:14Z
Check the source to verify that this is the current version before use.

TABLE I

Overall and Mounting Dimensions
Inch-Millimeter Equivalents

Inches	Millimeters
0.010	0.25
0.020	0.5
0.040	1.0
0.09	2.29
0.406	10.31
0.41	10.41
0.47	11.94
0.50	12.70
0.93	23.62
0.95	24.13
1.00	25.40
1.438	36.53
1.843	46.81
1.900	48.26
2.375	60.33
2.938	74.63
3.00	76.20
3.625	92.08
5.19	131.83
5.52	140.21
6.062	153.97
6.500	165.10
7.00	177.80
7.31	185.67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:14Z
Check the source to verify that this is the current version before use.