[METRIC]
A-A-2546C
May 6, 1999
SUPERSEDING
A-A-2546B
March 24, 1994

COMMERCIAL ITEM DESCRIPTION
PAD, WRITING, PAPER
(REPOSITIONABLE)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This description covers pads of repositionable, colored, note paper. Each sheet has a strip of pressure sensitive adhesive on the back side.

2. SALIENT CHARACTERISTICS.

2.1 Size. Size of the pads shall be furnished as specified in the ordering description.

Size	Horizontal (width)	Vertical (length)	Tolerance
1	12.7 cm (5 in.)	7.6 cm (3 in.)	±0.16 cm (±1/16 in.)
2	7.6 cm (3 in.)	7.6 cm (3 in.)	±0.16 cm (±1/16 in.)
3	5.1 cm (2 in.)	3.8 cm (1.5 in.)	±0.08 cm (±1/32 in)
4	5.1 cm (2 in.)	7.6 cm (3 in.)	±0.16 cm (± 1/16 in.)
5	10.1 cm (4 in.)	15.2 cm (6 in.)	± 0.16 cm (± 1/16 in.)

2.2 Paper. Paper used in the construction of the pad shall be of the color as specified in the ordering description, and shall conform to the requirements in Table I.

TABLE I

PROPERTY	REQUIREMENTS	TEST METHOD
Basis Weight g/m^2 (lbs. 17x22-500) ± 5%	75 (20#)	T410
Thickness, mm (inches)	0.094 ± 0.013 (0.0037 ± 0.0005)	T411

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Federal Supply Service, 26 Federal Plaza, New York, NY 10278

FSC 7530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

2.3 Adhesive coating. Each sheet of paper in the pad shall have a coating of repositionable, pressure-sensitive adhesive located on the back side of the sheet. The adhesive coating shall be applied flush to one horizontal edge of the sheet, shall extend the entire width of the sheet, and shall have a minimum width of 6.4 mm (1/4 inch). It shall not be possible to easily rub any adhesive from the back of the sheet with a finger.

2.4 Construction. A minimum average of 100 sheets of paper shall be assembled in the form of a pad. No individual pad shall contain less than 97 sheets. The pad paper and a backing sheet shall be securely fastened together by means of the repositionable, pressure-sensitive adhesive coating.

2.5 Performance.

2.5.1 The sheets of pad paper shall not exhibit feathering, spreading, skipping, beading, visible discontinuities or fading of ink when written on with a felt tip, permanent marker or ball point pen. The sheets of pad paper shall release easily from the pad without leaving any trace of adhesive on the underlying sheet.

2.5.2 Fiber pull. The sheets of pad paper, when adhered to a sheet of bond or xerographic dual purpose paper shall not pull paper fibers from the bond paper when tested as specified in the following method. Place a sheet of bond or xerographic dual purpose paper on a hard, flat surface. Randomly select two sheets. Separately place the two test sheets of the pad paper on the paper and adhere each by rolling once in their lengthwise direction (i.e., once back and once forth) using the roller described in ASTM D 3330. On one of the test sheets, write over the adhesive strip area with a sharp No. 2 pencil using enough pressure to indent the paper. Remove each test sheet from the bond paper. Evidence of paper fibers on the adhesive strip shall be considered as failure to meet the requirement.

2.5.3 Initial flagging. The sheets of pad paper, when adhered to a sheet of bond or Xerographic dual purpose paper shall remain attached to the bond paper when tested as specified in the following method. Adhere a sheet of the pad paper to the bond paper using the method described in 2.5.2. Hold the edges of the specimen so they do not lift off the paper before the timer is started. Roll the combined sample around a cylindrical object 5.1 cm (2 inches) in diameter with the horizontal edge of the sheet perpendicular to the axis of the cylinder. See Figure 1. Mark the points at which the specimen separates from the paper after thirty seconds have elapsed. The sheet of the pad paper shall not show a total flagging length in excess of 25% of the length of the horizontal edge, thirty seconds after the combined sample is mounted on the cylindrical object. Flagging is defined as the length, if any, of the adhesive end of the sheet which peels away from the bond paper due to stresses from being rolled up. Total flagging is the sum of flagging at both ends. See Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

2.5.4 Repositioned flagging. The sheets of pad paper, when repositioned shall remain attached when tested as specified in the following method. A sheet of pad paper is positioned on a sheet of bond or xerographic dual purpose paper and adhered using the procedure described in 2.5.2. It is removed and repositioned on a fresh section of the bond paper and adhered as above. This cycle is repeated 10 times. The sheet is then tested for 30 second flagging per 2.5.3 except that total flagging shall not exceed 60% of the length of the horizontal edge. See Table I I.

Table I I
Sheet Attachment; Initial and Repositioned

Sheet Size	Total Flagging cm (in), max. initial	Total Flagging cm (in),max. initial
12.7 cm x 7.6 cm (5" x 3")	3.2 cm (1.25")	7.6 cm (3.0")
7.6 cm x 7.6 cm (3" x 3")	1.9 cm (0.75")	4.6 cm (1.8")
5.1 cm x 3.8 cm (2" x 1.5")	1.3 cm (0.50")	3.0 cm (1.2")
5.1 cm x 7.6 cm (2" x 3")	1.3 cm (0.50")	3.0 cm (1.2")
10.1 cm x 15.2 cm (4" x 6")	2.5 cm (1.00")	6.1 cm (2.4")

2.5.5 Multiple lifts. The sheets of pad paper, when removed from the pad shall not exhibit multiple lifts when tested as specified in the following method. A pad is securely mounted to a flat, hard, horizontal surface using a double coated pressure sensitive adhesive tape. The tape covers the entire back side of the pad; the non-adhesive side of the pad faces up. A random number, between one and sixty, of sheets are removed from the top and discarded. The sheet remaining on top of the pad is removed by grasping between the thumb and forefinger and lifting off the pad at a 90-degree angle. This procedure is repeated 25 times. Count the number of times more than one sheet is removed at a time (multiple lift). This shall not occur more than on time.

2.6 Workmanship. Sheets of pad paper shall be clean and free from dirt, foreign matter, holes, tears, wrinkles, and other defects which might affect appearance or serviceability. The sheets shall be uniform with respect to color and formation. Pads shall be square cut with smooth, clean edges.

2.7 Bleaching. To obtain an acceptable brightness, or color , in accordance with this document, a chemical bleaching process may be used. When specified in the ordering data (See Section 6.2), the bleaching process shall not include the use of the chlorine, chlorine dioxide, hypochlorite, or other chlorine containing compound. The Government shall make certification of compliance available upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIREMENT. The contractor shall certify that the product offered shall contain a minimum of 30% postconsumer fiber as defined by the Paper Products Recovered Materials Advisory Notice (Paper RMAN) and the Executive Order 13101 dated September 14, 1998.

4. PRODUCT CONFORMANCE. The products provided shall meet the salient characteristics of this commercial item description. The quality of the product sold to the government shall be equal to or better than the quality of the product sold by the manufacturer in the commercial market. The government reserves the right to require proof of such conformance.

5. PACKAGING, PACKING, LABELING AND MARKING. The recycled content shall be marked on the product or unit pack. Packaging, packing, labeling, and marking shall be specified in the contract or order.

6. NOTES.

6.1 Referenced Documents. The issue of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this commercial item description.

6.1.1 TAPPI test methods are available from: Technical Association of the Pulp and Paper Industry, Technology Park/Atlanta, P.O. Box 105113, Atlanta, GA 30348 (770) 209-7276.

6.1.2 The Final Paper RMAN is available from EPA's public access server on the Internet or from the RCRA Hotline. The Hotline can be reached toll-free at (800) 424-9346. Copies of Executive Order 13101 is available from: The White House Publications Office, New Executive Office Building, Attn.: Publications, Washington DC, 20500, Telephone (202) 395-7332.

6.1.3 ASTM standard are available from the American Society of Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, Philadelphia, Pa. 19428-2959.

6.2 Ordering Data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

a. Title, number, and date of this commercial item description.

b. Sizes and dimensions.

c. Color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

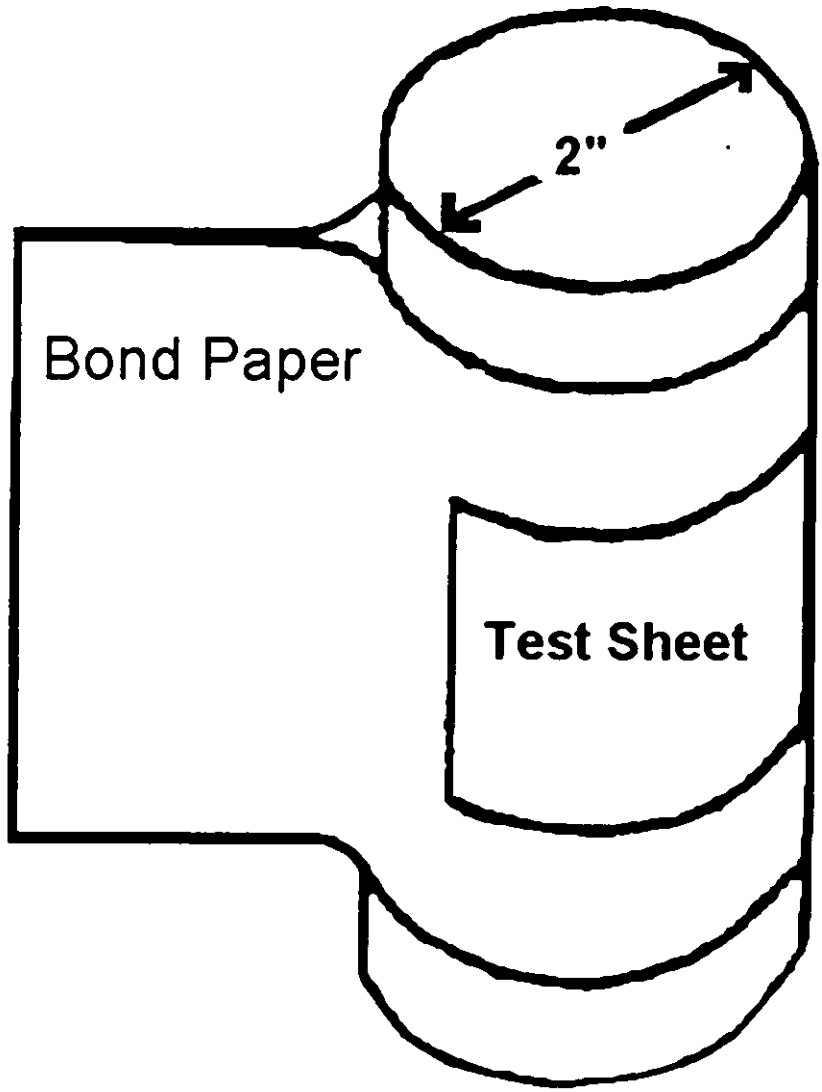


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

d. Whether bleaching without use of chlorine, chlorine dioxide, or chlorine compound is required.

e. Specific, packaging, packing, marking and palletization.

MILITARY INTEREST:

DOD has waived coordination of this document

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.