INCH-POUND

A-A-3029A
July 1, 2004
SUPERSEDING
A-A-3029
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

CUTTER, WIRE ROPE, HAND-OPERATED, HYDRAULIC, HORIZONTAL CUTTING

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers a hand-operated hydraulic wire-rope cutter used primarily in cutting plow steel wire rope such as that used for heavy hoisting on cranes, derricks, anchor cables, towing hawsers, mooring lines, and general purpose rigging.

2. CLASSIFICATION. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The cutter shall consist of a hand-operated hydraulic pump, main body, cutting blade, blade guides, and rope holder. The cutter shall be convenient, safe, and shall be operated by one person. No

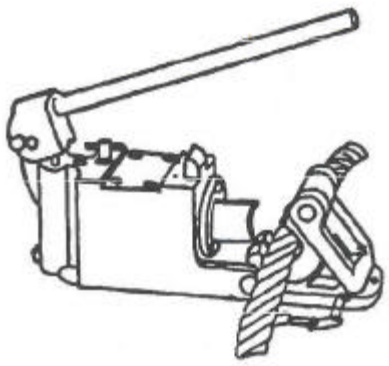

Figure 1. Cutter, wire rope, hand-operated, hydraulic, horizontal cutting.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Heartland Global Supply Center, HGS Engineering and Commodity Management Division, 1500 E. Bannister Rd, Bldg. #6, Kansas City, Missouri 64131.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

part of the cutter shall become detached accidentally during normal usage. Parts shall be castings, forgings, molded, or welded with no plugging or peening used for reclaiming castings or forgings. Surfaces not plated or of corrosion-resistant material shall be primed and painted with a good grade of enamel. All parts having the same manufacturer's part number shall be completely interchangeable without requiring modification. The unit shall operate efficiently in either the horizontal or vertical position. The capacity, weight, and dimensions for various rope size cutters is as specified in Table 1.

Table 1. Cutter, wire rope, hand-operated, hydraulic, horizontal cutting

Size Number	Capacity range of wire rope diameter (inch)	Weight (maximum) (pounds)	Overall Dimensions		
			Length (maximum) (inch)	Height (maximum) (inch)	Width (maximum) (inch)
1	0 – 3/4	22	13-1/2	6	4-1/4
2	0 – 1-1/18	34	15	7	4-1/2
3	0 – 1-3/4	62	19	8	5-1/4

3.1.1 Hydraulic Unit. The hydraulic unit shall be capable of operation by continuous hand pumping and shall develop sufficient pressure to easily force the cutting blade through the maximum size wire rope for which the cutter is rated. A release valve shall provide a positive return of the blade to its original position. There shall be no leaks of any hydraulic oil when operated in any normal working position under maximum working pressure or when idle. A means shall be provided to prevent damage if pumping is continued after severing the wire rope. The unit shall be filled to the normal level with standard hydraulic oil used in cutters. The unit for each size cutter (Table 1) shall be capable of providing a minimum thrust of 12, 16, and 28 tons for sizes 1, 2, and 3, respectively.

3.1.2 Cutting Blade. The cutting blade shall be of high grade tool steel properly hardened between 58 and 66 on the Rockwell C scale and shall be easily removable for resharpening or replacement. The design shall be such that blades will cut clean, leaving the rope end free of jagged wire and minimizing the deformation of the original roundness of the rope.

3.1.3 Rope Holder. The rope holder shall be hinge-mounted and designed for simple, positive latching or other suitable means for easily inserting the wire rope to be cut. The holder shall have blade guides incorporated to assure a clean even cut.

3.1.4 Main Body. The main body shall incorporate the hydraulic unit and cutting blade, and a means shall be provided for easily carrying the entire cutter in one hand. The underside of the body shall be suitably finished to prevent the tool from rocking under maximum load when operating on a flat surface.

3.2 Marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing defects (ie. pits, rips, fins, burrs, tears,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The product provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawing, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Preservation, packaging and marking shall be as specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Source of Documents.

American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371.

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents.

a. Title, number, and date of Commercial Item Description.
b. Size.
c. When applicable, the appropriate NSN(s).
d. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSN's). A list of NSN's assigned that correspond to this CID. The list may not be indicative of all possible NSN's associated with the CID.

NSN	Size
5110-00-242-8807	1
5110-00-224-7058	2
5110-00-926-3533	3

7.4 Key words. Cutter, wire rope, hand-operated, hydraulic, horizontal cutting

MILITARY INTERESTS:
NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:
GSA-FAS(FSS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.