[INCH-POUND]
A-A-3061
November 1, 1996
TO SUPERSEDE
NN-H-101F
March 12, 1973

COMMERCIAL ITEM DESCRIPTION

HANDLES, MOP (WET)

1. SCOPE. This commercial item description (CID) covers wood and metal mop handles and three types of attachment fixtures to hold wet-cleaning string type mopheads.

2. CLASSIFICATION. Mop handles and attachments covered by this CID shall be of the following types, classes, and sizes as specified.

Type I - Screw type.
Type II - Spring-lever type.
Type III - Clip type.

Class 1 - Wood handles.
Class 2 - Metal handles.

Size A - 54 inch long handle.
Size B - 60 inch long handle.
Size C - 72 inch long handle.

3. SALIENT CHARACTERISTICS

3.1 Materials. The mop handles shall consist of wood, plastic covered steel tubing, or plastic covered aluminum alloy tubing, to which are attached metal fixtures for securely holding a mophead.

3.1.1 Wood handle. The wood for the class 1 handles shall be a close-grained and straight-grained, and shall be wood normally used for mop handles. The handles shall be free from cup, knots, heart center, rot, dote, brash, cross grain or spiral grain sloping more than 1 inch in 15 inches (1 cm in 15 cm), or any other defect that may affect appearance or serviceability. Wood handles shall have a round cross-section with a minimum diameter of 1-1/8 inch (2.86 cm), and be rounded on the hand end. The length shall be as specified with a tolerance of plus or minus 1/2 inch (1.27 cm). The handle shall be sanded smooth and coated with a clear sealant for a smooth, uniform and glossy finish.

3.1.2 Steel or aluminum alloy handle. The tubing for the class 2 handle may be steel or aluminum alloy at the manufacturers option. Steel tubing shall be not less than 0.029 inch (0.74 mm) wall thickness. The aluminum alloy tubing shall be not less than 0.057 inch (1.45 mm) wall thickness. The tubing shall be of a seamless, one piece welded construction, not less than 7/8 inch (22.2 mm) outside diameter. The handle length shall be as specified with a tolerance of plus or minus 1/2 inch (1.27 cm).

3.1.2.1 Handle cover. The metal handles shall be covered with a plastic sleeve from within 6 inches of the mop fixture end to the operator end. The operator end shall have a cap or plug secured in place to prevent the entry of water. The plastic cover shall have a thickness no less than 0.025 inch (0.64 mm) and be attached or tightly shrunk onto the metal tubing so that movement of the plastic on the metal handle by hand is not possible.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:29Z
Check the source to verify that this is the current version before use.

3.1.3 Metal components (except handles). All metal components except the handles shall be made of corrosion resistant materials or shall be plated to resist corrosion. When inspected, any evidence of corrosion shall fail the lot.

3.2 Design.

3.2.1 Type I, screw type. The screw type mop holder shall hold the mophead between the head and bail by means of a wingnut on a screw pin. Figure 1 depicts the general configuration of this mophead.

3.2.2 Type II, spring-lever type. The spring-lever type mop holder shall hold a mophead between the head and bail by means of a spring and lever. Figure 2 depicts the general configuration of this mophead.

3.2.3 Type III, clip type. The clip type mop holder shall hold a mophead by means of a detachable bail (spring yoke). Figure 3 depicts the general configuration of this mophead.

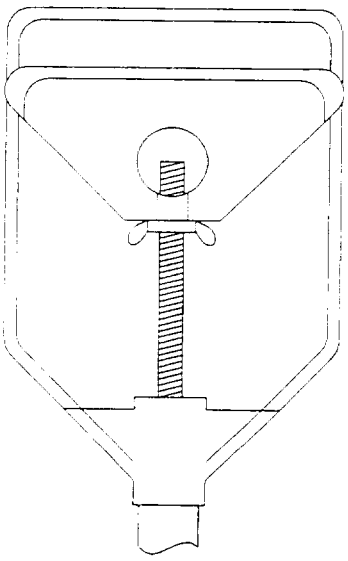


Figure 1
Type I

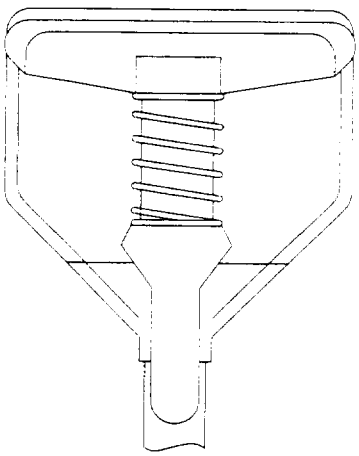


Figure 2
Type II

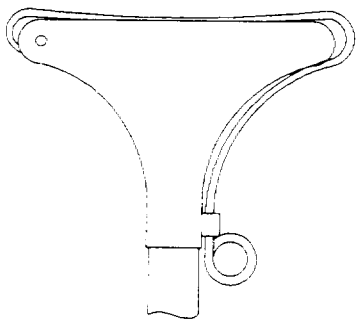


Figure 3
Type III

3.3 Construction. When the type I and II heads are fully open for insertion of a mophead there shall be a minimum space of 1-1/4 inches (3.18 cm). All types shall have an inside width of 6-1/2 inches, plus or minus 1/4 inch (16.51±0.64 cm). The steel wire from which the type I bails are formed shall be a minimum of 0.23 inch (5.8 mm) in diameter. The steel wire from which the type II bails are formed shall be a minimum of 0.162 inch (4.1 mm) in diameter. The spring clip on the type III shall be formed from wire 0.15 inch (3.8 mm) minimum in diameter. For all types, the attachment of the fixtures to the ferrule and the ferrule to the handle shall be in such a manner that the head will not loosen or come apart from the handle without purposeful disassembly. Permanent attachment, such as welding or riveting is permitted.

3.4 Workmanship. The finished mop handle assemblies shall be free from defects affecting appearance, serviceability or durability. The handles shall be free from warps, burrs, slivers, or rough spots. The heads and bails shall be free from burrs or sharp edges and shall open and close smoothly without damage, and shall not injure the operator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.5 Special marking. Each mop handle shall be permanently marked with its National Stock Number (NSN) either on the handle or on the head fixture.

3.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

3.7 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.


7. NOTES

7.1 Intended use. These mop handles are intended for use with "string" wet mopheads with 6-1/2 inch wide headbands, and will be used with water and cleaning solutions ranging from normal mopping detergents to highly caustic agents.

7.2 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this CID.
(b) Type, class, and size of mop handle required.
(c) Packaging, packing and marking required.

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

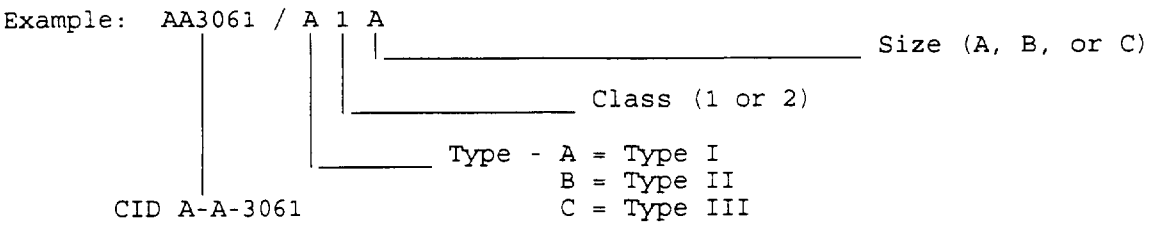

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7.4 Referencing NSN's. The following NSN's reference this document (this may not be a complete list):

NSN	Type	Class	Size	Part Number
7920-00-205-1168	I	1	A	AA3061/A1A
7920-00-267-1218	I	1	B	AA3061/A1B
7920-00-205-1167	I	1	C	AA3061/A1C
7920-00-550-9902	I	2	A	AA3061/A2A
7920-00-550-9911	I	2	B	AA3061/A2B
7920-00-550-9912	I	2	C	AA3061/A2C
7920-00-205-1170	II	1	B	AA3061/B1B
7920-00-781-5247	III	2	B	AA3061/C2B

Preparing Activity:
GSA-FSS/7FXEE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.