DDD-G-1377B
July 1, 1974
SUPERSEDING
Int. Fed. Spec. DDD-G-001377a (VAMI)
May 1, 1970
Fed. Spec. DDD-B-145
June 26, 1950

FEDERAL SPECIFICATION

GOWN - HOSPITAL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a hospital gown (bedshirt) which is loose fitting, open along the full length of the back, and fastened with tape or snaps.

1.2 Classification

1.2.1 Types. The gowns shall be of the following types, as specified:

Type I Round neck, short sleeves
Type II Standing collar, long sleeves

1.2.2 Classes. The gowns shall be of the following classes or classes and composition as specified:

Class 1 Jean 3 harness (2/1 twill)
Class 2 Pajama check
Composition: a - Cotton Size 1 80x80
b - Cotton Size 2 88x88
c - High Temperature Resistant, Nylon

Class 3 Cotton sheeting

1.2.3 Sizes. The gowns shall be furnished in medium and large as specified.

1.2.4 Grades. The gowns shall be furnished in the grade known commercially as firsts.

1.2.5 Finish. The gowns unless otherwise specified shall be regular finish.

FSC-6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENT

2.1 The following documents, of the issues in effect on date of invitation for bids, or request for proposal, form a part of the specification to the extent specified herein.

FEDERAL SPECIFICATIONS

V-T-276	Thread, Cotton
CCC-C-432	Cloth, Sheeting, Cotton
CCC-C-444	Cloth, Jean, Cotton
CCC-P-96	Pajama-check, Cotton
DDD-L-20	Label; For clothing, Equipage, and Tentage, (General Use)
DDD-T-86	Tape, Textile; Cotton, General Purpose (Unbleached, or Dyed)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

FEDERAL STANDARDS

No. 123	Marking for Domestic Shipment (Civil Agencies)
No. 191	Textile Test Methods
No. 751	Stitches, Seams, and Stitchings

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

MILITARY SPECIFICATIONS:

MIL-F-10884 Fasteners, Snap

MILITARY STANDARDS:

MIL-STD-105 Sampling, Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

MIL-STD-129 Marking for Shipment and Storage

(Copies of Military Standards and Specifications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by contracting officer.)

VETERANS ADMINISTRATION SPECIFICATION:

X-1601 Cloth, High Temperature Resistant, Nylon

(Copies of Veterans Administration Specifications may be obtained without charge from the Veterans Administration Marketing Center, P. O. Box 76, Hines, Illinois 60141.)

3. REQUIREMENTS

3.1 When specified (see 6.2) before production is commenced, a finished gown made in accordance with this specification shall be submitted to the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction samples authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Material

3.2.1 Fabric. The gowns shall be made of the material as specified in 1.2.2 and conform to the applicable specification and the requirements listed in Table I.

TABLE I - PHYSICAL REQUIREMENTS

CLASS FABRIC	Weight per sq. yd. min.	Yarns per in. min.		Breaking Strength min. (grab method)		Shrinkage maximum		Sizing maximum
		Warp	Fill.	Warp	Fill.	Warp	Fill.	
	Ounces			Lbs.	Lbs.	%	%	%
Class 1. Jean								
a-Bleached	4.7	98	60	80	48	1	1	5
b-Dyed	4.5	98	60	80	48	1	1	5
Class 2. Pajama-check								
a-Cotton Sz. 1 80x80	3.25	85	72	40	26	1	1	5
b-Cotton Sz. 2 88x88	3.5	94	80	52	35	1	1	5
c-High Temp. Resist. Nylon	3.0	81	69	125	100	3	3	5
Class 3. Cotton Sheeting								
a-Type VIII /Class 3	5.7	52	48	62	53	2	2	5

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

3.2.2 Thread

3.2.2.1 Thread used (except when specified for High Temperature Resistant Nylon, see 3.2.2.2) shall be white type 1A2, 3 card, conforming to the requirements of Federal Specification V-T-276. Ticket numbers 50, 60 or 70 shall be used with the exception that heavier thread may be used for class 1 gowns.

3.2.2.2 Thread used for Class 2, High Temperature Resistant Nylon. To be a continuous filament, approx. 100 denier, 3-ply, nylon thread.

3.2.3 Tape. Tape shall be cotton, woven, white, 5/8 inch wide, conforming to the requirements of Federal Specification DDD-T-86, or as an alternate 5/8" tape woven with size 30's two ply yarn, 72 warp ends, 52 picks, minimum breakage strength 85 pounds. Unless otherwise specified, the tape will be vat dyed to match to color of the gown.

3.2.4 Color. Color shall be specified in invitation to bid.

3.2.5 Label. When specified, label shall be of cotton with the manufacturer's name woven into it. The label shall be white with black or colored lettering and the letter shall have good color fastness to washing as evaluated in Federal Standard Test Method No. 191.

3.3 Construction

3.3.1 Construction. The body shall be designed with three pieces: a one-piece front; a one-piece left back; and a one-piece right back (Figure 1), except the sleeves shall be either the raglan type or set in type as specified. Seams are as follows: Shoulder; armhole and sleeve-underarm. When specified, the gowns shall have a patch pocket attached at the chest area of the left front, unless otherwise indicated in the invitation for bids. Each gown shall have two sets of tying tapes, or snap fasteners 16 or 17 line conforming to style III of Military Specification MIL-F-10884 except they shall be of stainless steel. One set at the neckline or collar, and the other set at the level of the bottom of the armhole.

3.3.2 Cutting. All integral parts of the gown shall be cut with the length wise of the patterns placed accurately along the warp yarns except the collar for type II gowns in which case the length of the collar may be cut fillingwise of the fabric. The sleeves shall be cut as a one-piece type except that one piecing will be permitted providing that it runs lengthwise of the sleeve and is far enough to the back of the sleeve to prevent the seam being visible from the front.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

3.3.3 Patterns. Gowns for use in hospitals for the Armed Forces shall be cut in strict accordance with patterns furnished by the respective services. Gowns for groups other than the Armed Forces shall be cut from patterns supplied by the manufacturer of the gowns. Such patterns shall be sized so that the finished gowns will have measurements that correspond to those in table III when they are taken as located in figure 2.

3.3.4 Stitches, seams, and stitching. Stitching and seaming shall be specified in table II and shall conform to the requirements of Federal Standard No. 751. Wherever stitch type 401 is used, the looper or under thread shall be ticket number 70, and shall be on the inside of the garment. All stitching shall be done with not less than 10 or more than 12 stitches per inch. The double-stitched seams shall be made with a gage of 1/4 or 3/8 inch. The sleeve and underarm closing shall be made with a continuous seam, care being exercised to insure the matching of the ends of the armhole seam when the sleeve-underarm seam is made. The hem in the bottom of the sleeve shall be made after the sleeve-underarm seam is finished, and the shirt hem shall be made after the back hems are finished.

3.3.5 Pocket. When specified, the pocket shall have diagonally cut lower corners as shown in figures 1 and 2, and shall be made from the same fabric as the gowns. The upper edge of the hem of the pocket shall be placed in line with the bottom of the armhole. The pocket shall be centered between the side seam and the center front of the gown with the edges of the pocket parallel with the center front of the shirt. The upper corners shall be stitched with diagonal stitching as shown in figure 1 or have a diagonally placed bartack that catches the ends of the stitching securely.

3.3.6 Neckline finishes

3.3.6.1 Type I, round neck. The round neckline of Type I gowns, except Class 2, High Temperature Resistant Nylon (see 3.3.6.2), shall be finished with a facing that is seamed at the shoulders and with a tape binding. The facing shall be placed on the right side of the shirt and stitched close enough to the neckline so that stitching will be covered by the tape that binds the neck and extends beyond for the tie ends. A bartack shall be made across the tape binding at the ends of the neckline. The bartack shall catch securely the ends of the stitching that holds the binding so that it does not loosen when the tapes are tied. The outside edge of the facing shall be turned under and stitched to the gown.

3.3.6.2 Type I, round neck, Class 2, High Temperature Resistant Nylon. Round neck shall be finished with a facing that is seamed at the shoulders. This facing is to be stitched to the wrong side of the garment, then turned and stitched to the right side of the garment for Type I as indicated in Figure 1. The neckline shall be reinforced with an additional stitching line not more than 1/4" away from neckline. No additional tape or binding is required around the neck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE II - SEAM AND STITCH TYPE

Location	Seam type	Stitch type
Shoulder	LSc-2 or SSe-2* or LSK-2	301 or 401
Armhole	LSc-2 or SSe-2* or LSK-2	301 or 401
Sleeve-underarm	LSc-2 or SSe-2* or LSK-2	301 or 401
Neck facing for type I:		
Upper edge	SSa-1 (1)	
Lower edge	LSd-1 or SSc-1	301
Collar for type II	BSg-2	301
Hem-bottom, sleeves, and back	EFb-1	301
Pocket:		
Hem	EFb-1	301
Sides, and bottom	LSd-1 or SSc-1 (2)	301
Tapes:		
Lower tapes for all types and upper tape for type II	(3)	301
Upper tape for type I	BSd-2 (1)	301 & 304 or 404

(1) See Paragraph 3.3.6.1
(2) See Paragraph 3.3.5
(3) See Paragraph 3.3.7
* Not acceptable for High Temperature Resistant Nylon, Class 2, Type I

3.3.6.3 Type II, Standing Collar. The neckline of type II gowns shall be finished with a standing collar made of a folded piece of fabric. Ends of the collar shall be seamed and the collar shall be turned right-side out before being attached with seam type BSg-2. The collar shall be stitched 1/16 inch from the ends and upper edge as well as along the neckline.

3.3.7 Attaching Tapes. The lower tapes shall be attached 9-1/2 inches below the neckline as follows: the tape shall be placed flat on the garment with the cut end 1/4 inch from the edge of the back hem and shall be securely stitched to the garment; the tape then shall be folded over toward the edge of the garment so as to cover the cut end of tape, and stitched with a stitching or with a bartack. The upper tapes for type II gown shall be attached as lower tapes are attached. All tapes shall have free ends hemmed and held with rectangular or "X" stitching, or shall be bartacked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.3.8 Snap Fasteners. Left back opening faced full a minimum of 3/4 inch wide to provide three thicknesses of material to support two female members of snap fasteners 16 or 17 line conforming to Style III of Military Specification MIL-F-10884 except they shall be stainless steel. Top fastener to be located approximately 1/2 inch from neckline properly centered on facing. Bottom fastener located 9-1/2 inches below neckline.

3.3.8.1 Right Back. Faced full a minimum of 3/4 inch wide to provide three thicknesses of material to support male members of snap fasteners which will be located to correspond with fasteners on left back.

3.4 Measurements. The measurements of finished gowns shall conform to the minimum requirements of table III.

3.5 Workmanship. Workmanship shall be first class. The finished gowns shall be clean, well pressed, and free from any defects which affect the appearance or which may impair the serviceability. There shall be no raw edges of fabric or tape, or loose threads.

TABLE III - MINIMUM FINISHED MEASUREMENTS

Location	See Fig. 2	Size Medium Inches	Size Large Inches
Shirt length - from side of neckline to bottom of hem	A	43	45
width - across chest	B	27	29
width - between shoulders	C*	21	23
Sleeve width at top	D*	10	11
length underarm - for type I	E	14	14
for type II	E	17	19
Width at bottom - for type I	F	8-1/2	9-1/2
for type II	F	8	9
Shirt width - across bottom	G	27	29
Neckline for type I	H1	8	8-1/2
Collar length - for type II	H2	16	17
height - for type II	H3	1-1/8	1-1/8
Neckline facing - depth at center front for type I	I	2	2
width at lower edge for type I	J	9-1/2	9-1/2
Pocket depth - at center	K	5-1/2	5-1/2
width - across top	L	5	5
Hem width - for bottom, back edges, and sleeves	M1	1/2	1/2
for pocket top	M2	1	1
Tapes - free length for lower tapes	N1	11	13
free length for upper tapes for type II	N2	11	13
one-half of total length-upper tape/type I	N3	19	21

* - C and D not applicable for raglan sleeves

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First Articles. When required, the preproduction sample submitted in accordance with 3.1 shall be inspected as specified in 4.2.4.2 through 4.2.4.4 for compliance with design, workmanship and dimensional requirements.

4.2.1 Sampling for test. Not less than 2 gowns shall be taken at random by the inspector for inspection from each 1,000 gowns or fraction thereof; except that when the shipment is over 10,000, 2 gowns shall be taken from each one-tenth of the shipment.

4.2.2 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQL) expressed in defects per 100 units (DHU), except when otherwise specified, shall be as follows:

	AQL	Inspection Level
4.2.4.2, 4.2.4.3 (combined)		II
Major	2.5	
Total	100	
4.2.4.4		S-2
One Class	4.0	

4.2.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated hereinafter.

4.4.4 Examination of the end item. The classification of defects found during the examination shall be in accordance with defects listed in 4.2.4.2 through 4.2.4.4. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.2. The sample unit shall be one gown.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

4.2.4.1 Classification of defects. All visual defects shall be classified as indicated below.

4.2.4.2 General defects.

Defect	Classification	
	Major	Minor
Material defects and damages		
a. Hole, needle chew, scissor or knife cut, tear or mend.	X	
b. Any weakening defect such as smash, multiple float or loose slub.	X	
Shaded parts		
a. Any outside part shaded.	X	
Cleanness		
a. Spot or stain on outside		X
b. Thread ends not trimmed or loose threads not removed.		X
c. Two or more shade or size markings not removed.		X
Component and assembly		
a. Any component part or operation omitted (unless otherwise classified herein).	X	
Cutting		
a. Any component part not cut in conformance with directional lines on pattern.	X	
b. Any component part not as specified.	X	
Seams and stitching		
a. General:		
1. Any part of gown caught in any unrelated operation.	X	
2. Seams twisted, puckered or pleated (unless otherwise classified herein).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Defect (Continued)	Classification	
	Major	Minor
3. Wrong shade or varying shades of thread used on outside of same garment.		X
4. Ends of all stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X
5. Thread breaks (all stitch types) stitches less than 1/2 inch beyond each end of break.		X
6. Continuous line of stitching overlapped less than 1/2 inch.		X
b. Gage of stitching:		
1. Unevenly gaged or various stitching not uniform.		X
2. Beyond width specified or varies more than 1/16 inch when no range is specified.		X
c. Open seams:		
1. Up to 1/4 inch inclusive		X
2. Over 1/4 inch	X	
NOTE: One or more broken or two or more continuous skipped or runoff stitches are considered an open seam. Double stitched seams are considered open when either one or both sides of seams are open.		
d. Raw edges:		
1. On outside:		
(a) more than 1/4 inch, but not more than 3/4 inch		X
(b) more than 3/4 inch	X	
2. On inside:		
(a) 3/4 inch to 1 inch inclusive		X
(b) more than 1 inch	X	
NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Defect (Continued)	Classification	
	Major	Minor
e. Runoffs (see classification of open seams).		
f. Seam and stitch types:		
1. Not specified seam or stitch type	X	
2. Looper thread (when stitch type 401 is used) on outside.	X	
g. Stitch tension:		
1. Loose tension on edge or raised stitching, resulting in exposure of bobbin or top thread.		X
2. Loose tension, resulting in a loose seam.	X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.		
h. Stitches per inch:		
1. Less than minimum specified by:		
(a) one or two stitches		X
(b) three or more stitches	X	
2. More than maximum specified.		X
i. Stitches skipped or broken:		
1. On raised or edge stitching 1/2 inch or more.	X	
2. Less than 1/2 inch at two or more places.		X
3. On all other stitchings: see "c. Open seams".		
Bartacks		
a. Less than 3/8 inch or more than 1/2 inch long.		X
b. One or more omitted or added, or type not as specified (when applicable).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Defect (Continued)	Classification	
	Major	Minor
4.2.4.3 Detailed defects applicable to specific parts.		
Collar		
a. Not type specified	X	
b. Facing not proper		X
c. Collar length not within specification		X
Pocket		
a. Design not in accordance with pattern	X	
b. Dimensions not in accordance with minimum measurements	X	
Tapes		
a. Not attached properly		X
b. Wrong color for size	X	
c. Dimensions wrong		X
d. Free ends of tying tapes not hemmed		X
e. Box stitching or bartacks (when applicable).		
1. Diagonal lines of stitching omitted from box stitching		X
2. One of the (two) required bartacks on one or more tapes omitted, insecure, or misplaced, not serving intended purpose.		X
f. Attachment:		
1. Less than 1-3/8 inches or more than 1-5/8 inches from right or left edge of back parts or collar.		X
2. Second tie tape positioned less than 5-3/4 inches or more than 6-1/4 inches from collar tapes (measurement between tie tapes to be taken from nearest edges).		X
3. Third tie tape positioned less than 11-3/4 inches or more than 12-1/4 inches from collar tape (measurement between tie tapes to be taken from nearest edges).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.2.4.4 Size measurements. For measuring, the finished garment shall be laid on a smooth flat surface with front up, with no tension, and with no wrinkles or creases that will affect the measurements. All measurements under 6 inches shall be plus or minus 1/8 inch, 6 to 12 inches plus or minus 1/4 inch and over 12 inches plus or minus 1/2 inch. (See Figure 2 and Table III).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each gown shall be neatly folded to measure approximately 28-1/2 inches long by 14-1/2 inches wide. Ten folded gowns of one size, shall be evenly stacked in a bundle. Each bundle shall be securely tied at each end with cotton tape or twine approximately four inches from each end. In the event vendor is required to ship fewer gowns than stipulated for a case, he may pack different size gowns into a shipping container provided he has so marked the shipping container.

5.1.2 Level C. The number of gowns specified, shall be packaged to afford adequate protection against damage during shipment from the supply source to the receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

5.2.1 Level A. The number of gowns as specified shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW. grade V15C of PPP-F-320. Each shipping container shall be closed, waterproofed, and reinforced with strapping or tape banded in accordance with the appendix of PPP-B-636.

5.2.2 Level B. The number of gowns as specified shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF class domestic, grade 275 or PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF class domestic, variety DW, grade 275 of PPP-F-320. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.3 Level C. The number of gowns specified shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules and regulations of carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civilian Agencies. In addition to any special marking specified in the contract or order, the shipping container shall be marked in accordance with Federal Standard No. 123.

5.3.2 Military Agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The gown is intended for wear by patients.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of specification.

(b) Type. - (see 1.2.1), Class or Class and Composition. - (see 1.2.2), Size. - (see 1.2.3), Finish when specified. - (see 1.2.5).

(c) Preproduction sample (see 3.1)

(d) Color of tape (see 3.2.3). Color of gown to be specified in invitation to bid (see 3.2.4).

(e) What type sleeve desired (see 3.3.1).

(f) Whether pocket is required (see 3.3.1 and 3.3.5).

(g) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification does not include all types, classes, grades sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

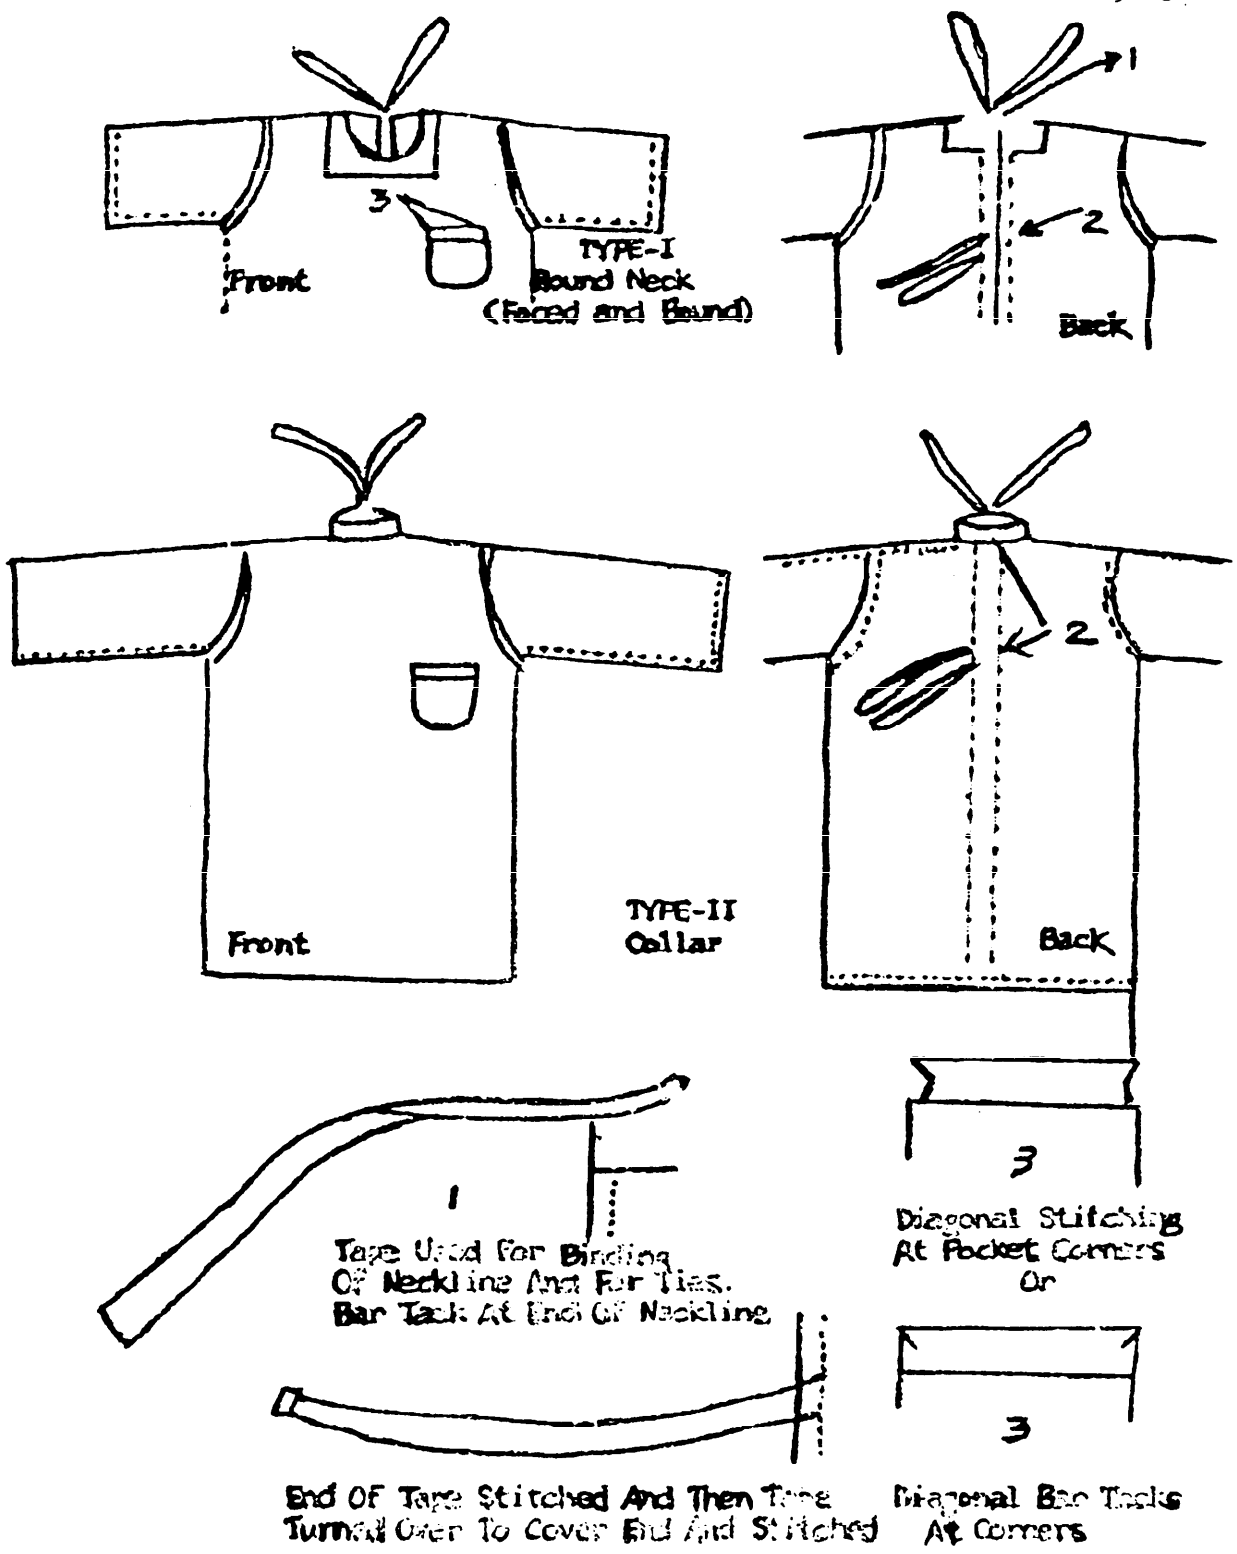


FIGURE 1. Hospital bedshirts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

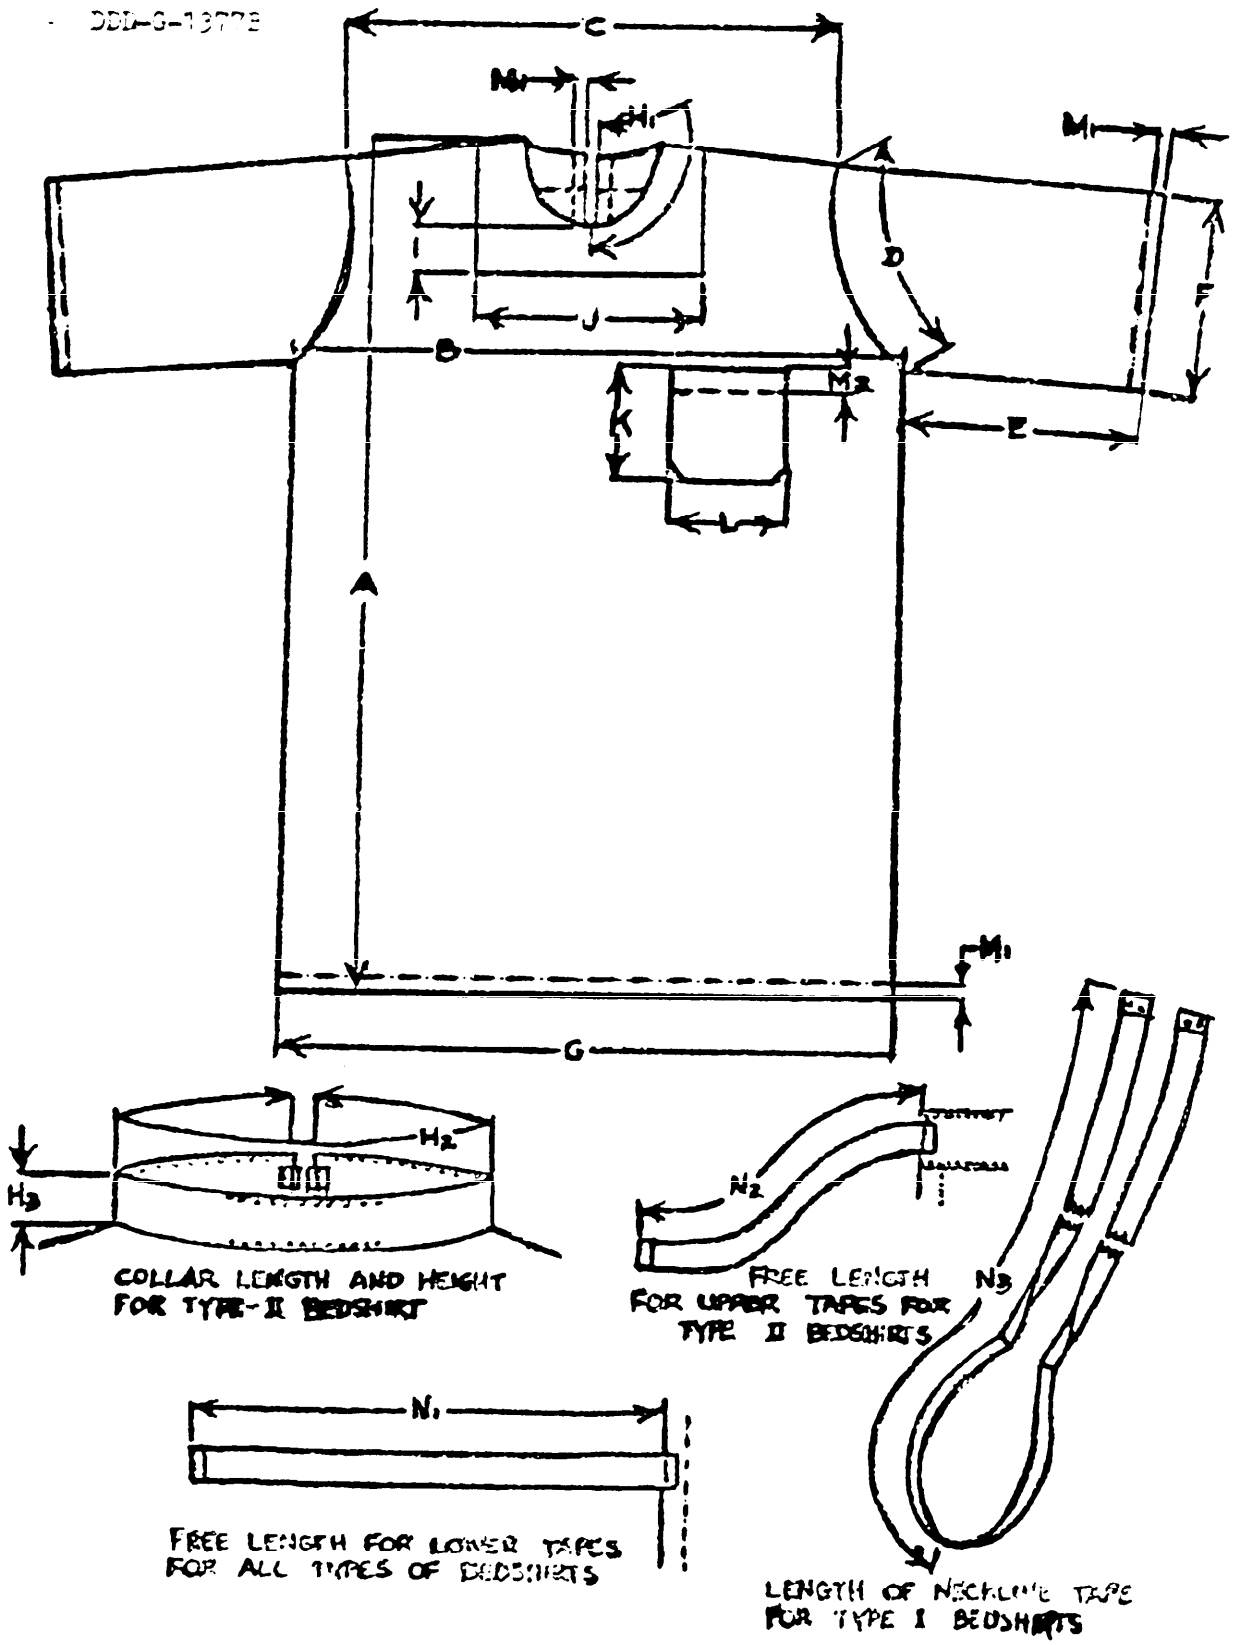


FIGURE 2. Location of finished measurements for hospital bedshirts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army	GL
Navy	MS
Air Force	03

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
HEW - PHS
VA - DMS

Preparing activity:

VA - DMS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 45 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Mr. Frank E. Frick
Chief, Interagency Coordination Staff
Supply Service, DM & S, Code 1341
Veterans Administration STOP 73
Washington, DC 20420

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.