GGG-B-0060a(GSA-FSS)
May 18, 1966
SUPERSEDING
Int. Fed. Spec. GGG-B-0060(GSA-FSS)
January 29, 1964

INTERIM FEDERAL SPECIFICATION

BAG, TOOL SATCHEL

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D.C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 This specification covers one type of tool bag used by repairment to carry tools and small parts.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification.

Federal Specifications:

CCC-A-700 Artificial Leather, Cloth Coated, Vinyl Resin.
PPP-B-585 Boxes, wood, wirebound.
PPP-B-601 Boxes, wood, cleated-plywood.
PPP-B-621 Boxes, wood, nailed and lock corner.
PPP-B-636 Boxes, fiberboard.
PPP-B-640 Boxes, fiberboard, corrugated, triple wall.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Military Specifications:
MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustration. The illustration shown herein is for the convenience of identification and is not intended to preclude the purchase of tool bags which are otherwise in accordance with this specification.

3.2 Material. Material shall be as specified herein. Materials not definitely specified herein shall be of the quality best suited for the purpose intended.

3.2.1 Leather or artificial leather. Unless otherwise specified (see 6.1) 6 ounce (6/64 inch thick) full grain cowhide shall be used to fabricate both the handle covering and the body of the tool bag. When artificial leather is specified (see 6.1), it shall be in accordance with CCC-A-700, Class 3, Treatment b.

3.2.2 Thread. Thread used in sewing shall be nylon or wax-permeated pure linen having a minimum breaking strength of 24 pounds.

3.3 Construction. The tool bag shall be of sturdy construction so as to withstand hard and rough usage. Construction shall conform to the requirements of this specification and the bag shall be suitably reinforced to withstand the tests specified herein.

3.3.1 Stitches. All stitches shall be the lock stitch type, properly formed and evenly spaced with not less than four stitches per inch of stitching.

3.4 Design. The tool bag shall be similar to figure 1 and shall consist of a body, a lower compartment, three metal trays, a handle, a lock and catches.

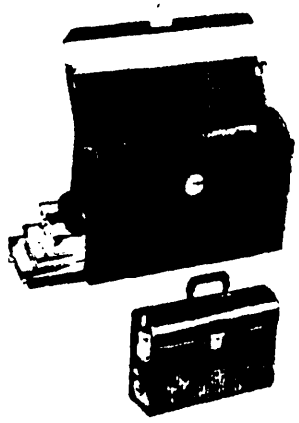


Figure 1. - Bag, Tool, Satchel

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

3.5.1 Body. The body shall consist of a back, top cover flap, front, tray opening and tray cover flap, ends and bottom. The body shall be fabricated from the material specified in 3.2.1.

3.5.1.1 Back and top cover flap. The back of the bag shall be of one piece and shall extend up and over the bag to form a cover flap. The inside front edge of the cover flap shall be stiffened and reinforced with a 1-1/2 inch wide strip of the material specified in 3.2.1 sewn in place. A metal strip 15 inches in length, plus or minus 1/2 inch, for reinforcing the cover flap where the handle is attached, shall be properly placed on the inside of the cover flap and a cover shall be sewn in place over the metal strip.

3.5.1.2 Front. The front shall be of one piece and shall be sewn in place and riveted at each top corner. The inside top edge of the front shall be stiffened and reinforced with a strip of 1-1/2 inches wide material sewn in place.

3.5.1.3 Tray opening and tray cover flap. A tray opening covered by a flap shall be provided in one end of the bag for removing the trays from the lower compartment.

3.5.1.4 Ends. The ends of the bag shall be stiffened and reinforced with leather, plywood, or similar material securely fastened in place.

3.5.1.5 Bottom. The bottom shall be of one piece, and assembled in accordance with the manufacturer's standard practice and shall be equipped with six steel studs to support and protect the bag.

3.5.2 Lower compartment. The lower compartment shall be fabricated from 1/4 inch plywood, securely riveted in the bottom of the bag. That portion of the plywood that is exposed in the upper compartment of the bag and the ends exposed when the tray flap is open shall be covered with a plastic material securely bonded in place. The inside dimensions of the lower compartment shall be of proper dimensions to contain the three trays specified in 3.5.3.

3.5.3 Trays. The bag shall be provided with three metal trays. Each tray shall be provided with a hinged lid and a conveniently located pull for removing the tray from the bag. The trays shall be fabricated from steel, plated to resist corrosion, or aluminum. The trays shall be not less than 13-13/16 inches long and 3-13/16 inches wide exclusive of lid dimensions, with height and number of compartments as follows:

	Minimum Height	Minimum No. of compartments
Small tray	3/4 inch	16
Medium tray	15/16 inch	7
Large tray	1-3/8 inch	4

The compartments shall be made of metal and securely fastened to the tray.

3.5.4 Handle assembly. The handle assembly shall consist of a covering over a steel or aluminum core and with suitable metal loops and brackets. The handle assembly shall be riveted in place, on top of the bag, through the handle reinforcement strip.

3.5.5 Lock. The tool bag shall be equipped with a three-position extension lock. The lock shall be capable of holding the bag closed when the bag is lifted by the handle with a 25 pound load inside. Two fitted keys shall be provided with each lock.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

3.5.6 Catches. The tool bag shall be provided with substantial positive catches to hold the top flap closed and to evenly distribute the weight of the load in the bag when supported by the handle. The end flap on the lower compartment shall be provided with one or two substantial positive catches to hold the flap in a closed position.

3.6 Finish and color. The bag shall have a smooth finish. The color shall be black.

3.7 Identification of product. Tool bags shall be permanently marked in a plain and legible manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.8 Workmanship. The workmanship shall be in accordance with high grade commercial practice which produces a tool bag with a neat appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling.

4.2.1 Inspection lot. All tool bags manufactured by a single production process and offered for delivery at one time shall be considered a lot for purposes of acceptance inspection.

4.2.2 Sampling for visual and dimensional inspection. A random sample of tool bags shall be selected from each lot in accordance with MIL-STD-105 at inspection level at inspection level [illegible] the acceptable quality level (AQL) shall be 1.5 percent defective.

4.2.3 Sampling for acceptance tests. A random sample of tool bags shall be selected from each lot in accordance with MIL-STD-105 at inspection level S-1. The AQL shall be 6.5 percent defective.

4.3 Visual and dimensional inspection. Each of the sample tool bags selected in accordance with 4.2.2 shall be visually and dimensionally examined to determine compliance with this specification. Any tool bag in the sample containing one or more defects shall be rejected.

4.4 Acceptance tests. Each sample tool bag selected in accordance with 4.2.3 shall be tested in accordance with 4.5 to verify compliance with this specification. Any tool bag in the sample which does not meet the requirements for any of these tests shall be rejected.

4.5 Test procedures.

4.5.1 Load test. Each sample tool bag shall be loaded with 100 pounds of tools, lead shot, or other similar bulk material. Each bag shall then be closed and lifted 10 times by the handle. The bag shall be rejected if any damage results which would affect its serviceability.

4.5.2 Drop test. Each bag that has passed the load test shall be loaded with 25 pounds of tools, lead shot, or other similar bulk material. The bag shall be held closed by the lock, lifted by the handle, and dropped three times from a height of 12 inches onto a concrete surface. The bag shall be rejected if any damage results which would affect its serviceability.

4.6 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking requirements as required by section 5 of this specification are complied with. Defects shall be scored in accordance with table I. For examination of contents, the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Table I. - Classification of preparation for delivery defects

Examine	Defect
Markings (exterior and interior containers)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as: Incomplete closure of container, loose strapping. Bulging or distortion of containers.
Packaging and Packing	Packages improperly sealed. Case liner omitted. Case liner not sealed.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.1).

5.1.1 Level A. Each tool bag shall be packaged in a close-fitting box conforming to PPP-B-636, class 2, V3c, style RSC. The keys shall be placed in a kraft envelope and the envelope sealed. The sealed envelope shall be secured inside the bag. The box shall be closed and waterproof sealed with tape in accordance with the appendix to the box specification.

5.1.2 Level B. Each tool bag shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic. The keys shall be placed inside the tool bag. The bursting strength of the fiberboard shall be not less than 200 P.S.I. Closure shall be in accordance with the appendix to the box specification.

5.1.3 Level C. The tool bags shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from the supply source to the first receiving activity for immediate use. The supplier's commercial practice will be acceptable when it fulfills the above requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A. Unit packages of tool bags in quantities as specified (see 6.1)shall be packed in a close-fitting box conforming to PPP-B-585, class 3; PPP-B-601, overseas type; PPP-B-621, class 2; PPP-B-636, class weather-resistant or PPP-B-640, class 2, grade A. The box shall be closed and strapped in accordance with the applicable specification or appendix thereto. The gross weight of the triple-wall or wood boxes shall not exceed 200 pounds; the gross weight of the PPP-B-636 box shall not exceed the weight limitations of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Six tool bags, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636, class domestic. Bursting strength of the fiberboard shall be not less than 200 P.S.I. Each box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. The tool bags shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred option permitted herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Artificial leather (see 3.2.1).
(c) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).
(d) Quantities of unit packages required in the shipping container (see 5.2.1).
(e) Any special marking required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.