GGG–H–20a
JULY 6, 1961

SUPERSEDING
Int. Fed. Spec. GGG–H–0020(NAVY–Ships)
February 19, 1959 and
Fed. Spec. GGG–H–86a (IN PART)
July 6, 1955
(See Section 6)

FEDERAL SPECIFICATION

HAMMER, HAND, (BODY AND FENDER, FORGED STEEL HEAD)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hammers used by automobile body and fender repairmen for striking against sheet steel and reworking the damaged sections to within a reasonable appearance of the original shape.

1.1.1 *Federal specification coverage.* This specification does not include all types, classes, and styles of body and fender hand hammers which are commercially available, but includes only those most commonly used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes and styles.* Body and fender hand hammers shall be of the following types, classes, and styles, as specified (see 6.2):

Type I.—Bumping.
- Class 1.—Finishing.
  - Style A.—Flat faces.
  - Style B.—Convex faces.
  - Style C.—Offset square face and cross peen.
- Class 2.—Cross and straight curved faces.
- Class 3.—Cross peen (chisel).
  - Style A.—Straight.
  - Style B.—Curved.

Type II.—Pick and surfacing.
- Class 1.—Round face and straight pointed pick.
- Class 2.—Round face and curved pointed pick.

Type III.—Ding.
- Class 1.—Square and round faces.
- Class 2.—Both faces round.
  - Style A.—Flat faces.
  - Style B.—One face convex.
- Class 3.—Shrinking.
  - Style A.—Both faces serrated.
  - Style B.—Round face serrated.

Type IV.—Utility.

Type V.—Roughing out (fender bumping).

1.2.1 *Sizes.* Sizes shall be the weights as shown for each type, class, and style (see 6.2).

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in these agencies.)

Military Specifications:

MIL–P–15424—Packaging of Hand Tools for Domestic and Overseas Shipment.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Department of Commerce:

Simplified Practice Recommendation R77–45—Hickory Handles.

(Copies may be obtained from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of hammers which are otherwise in accordance with the requirements of this specification.

3.2 Design and manufacture. All hammer heads shall be hammer-forged. The design shall be essentially as shown on the applicable figure for the type, class, or style required (see 1.2).

3.3 Material.

3.3.1 *Hammer head.* The hammer head shall be of high-grade forging steel, free from all imperfections that may adversely affect the serviceability or durability of the finished product (see 3.13).

3.3.2 *Handles.*

3.3.2.1 *Hickory handles.* Hickory handles shall be grade B or better as specified in Department of Commerce, Simplified Practice Recommendation R77–45. Hickory handles shall be secured with one or more metal wedges or metal screws without, or in combination with, wood wedges. Wedges and screws shall be driven or screwed, respectively, flush within plus or minus $\frac{1}{32}$ inch with the front surface of the tool eye. The wedge, wedges, or screws, or a combination of the same, shall create sufficient expansion to completely fill the tool eye and tightly wedge the handle in the eye of the hammer so as to minimize the head from working loose under the most severe working conditions. The screws shall be of the tapered, headless type.

3.3.2.2 *Fiber glass reinforced plastic handles.* Fiber glass reinforced plastic handles shall be well proportioned and be molded of a thermosetting type plastic containing a minimum of 60 percent fiber glass by weight. Glass filament fiber orientation shall be unidirectional and longitudinal and the fibers shall be continuous. Fiber glass reinforced handles shall be inserted and bonded by means of a chemical adhesive,

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

or otherwise affixed, to the eye or cavity of the tool head in such a manner that the handle will not loosen under any working condition. The chemical adhesive shall completely fill the eye or cavity in the head. The grip portion may be covered with rubber, neoprene, vinyl, or other comparable material. Hammers and handles assembled with a chemical adhesive shall be subjected to the pull apart test specified in 4.4.3.

3.4 Construction.

3.4.1 *Heads.* The heads of all hammers shall be forged in one piece. The striking faces, points, and chisel ends shall be properly hardened and tempered from 48 to 58 on the Rockwell "C" scale. Striking faces shall be uniform across the surface and shall be free from irregular and unfinished areas. The surface of the striking faces shall be either flat or slightly convex, except where either flat or convex faces are definitely specified under the individual type or class herein. Flat faces shall be completely free of curvature. The edges of all faces shall have a chamfer or radius of not less than 1/32 inch nor more than 1/16 inch. Striking faces, points, and chisel ends shall be capable of withstanding chipping, cracking or spalling when tested as specified in 4.4.2.

3.4.2 *Eyes.*

3.4.2.1 *Hammers with hickory handles.* The head shall be provided with an eye which shall extend through the head and in which the handle shall be fitted. Eyes shall have an inward taper at an included angle of approximately six to ten degrees to permit proper wedging. The eye shall be properly heat treated and of such size, shape, and strength as to prevent buckling, cracking, breaking, or spreading in ordinary use. The difference in the thickness of corresponding sections of opposite walls of the eye of any hammer shall not exceed 1/32 inch.

3.4.2.2 *Hammers with fiber glass reinforced plastic handles.* The head shall be provided with an eye conforming to 3.4.2.1 or the heads may have a hole drilled, reamed, or forged approximately 3/4 of the distance through the head in the place where the eye is normally located.

3.4.3 *Assembled hammers.* Hammers shall be furnished with hickory handles unless fiber glass reinforced plastic handles are specified (see 6.2).

3.5 Finish.

3.5.1 Polish finish shall be a smoothly ground surface, free from excessive scratches and roughness. Scratches, if any, and the surface appearance of the finish shall not be coarser than that resulting from the use of an 80-grit abrasive wheel.

3.5.2 *Natural.* Natural finish shall be a ground finish using not coarser than a 46-grit abrasive wheel, or an even, smooth, forged surface, free from scale or rust (obtained by sand blasting, tumbling, or other suitable method) or a combination of ground and forged surfaces.

3.6 Coating. All surfaces except polished surfaces shall be coated with paint, lacquer, or enamel. The coating shall not be tacky nor flake off readily.

3.7 Identification marking. Each hammer shall be marked on the head in a permanent and legible manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.8 Type I bumping.

3.8.1 *Class 1, finishing.*

3.8.1.1 *Style A, flat faces.* Style A hammers shall have one round and one square face. Both faces shall be flat or slightly convex. The center of the eye shall be equidistant from both faces within ±1/8 inch. The faces shall have a polished finish. The remainder of the head may have a natural finish. Style A hammers shall be similar to figure 1 and shall conform to the requirements specified in table I.

3.8.1.2 *Style B, convex faces.* Style B hammers shall have one round and one square face. Both faces shall be convex, with a crown height

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

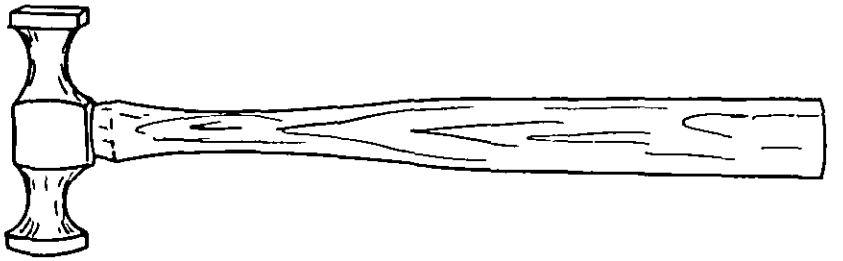


FIGURE 1.—Type I, class 1, styles A and B hammers, bumping, finishing, flat and convex faces.

TABLE I.—*Type I, class 1, styles A and B hammers, bumping, finishing, flat and convex faces*

Weight without handle ±1	Handle length ±1	Diameter of round face	Dimension across flats, square face	Overall head length ±⅛
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
8	12	1¼ ± ⅛	1⅛ ± ⅛	3⅞
11	12	1½ ± ⅛	1⁵⁄₁₆ ± ³⁄₁₆	4¼
14	12	1⅝ ± ⅜	1⅜ ± ¼	4⅛

of not less than 0.008 inch. The center of the eye shall be equidistant from both faces within ±⅛ inch. The faces shall have a polished finish. The remainder of the head may have a natural finish. Style B hammers shall be similar to figure 1 and shall conform to the requirements specified in table I.

3.8.1.3 *Style C, offset square face and cross peen.* Style C hammers shall have one offset square and one cross-peen face. The offset square face shall be flat or slightly convex while the cross-peen face shall be convex. The center of the width dimension of the cross-peen face and the center of the eye shall be located on a common center line which shall be approximately perpendicular to the longitudinal axis of the hammer while the center of the offset square face shall be at least ⅝ inch offset from this line. The faces shall have a polished finish. The remainder of the head may have a natural finish. Style C hammers shall be similar to figure 2 and shall conform to the requirements specified in table II.

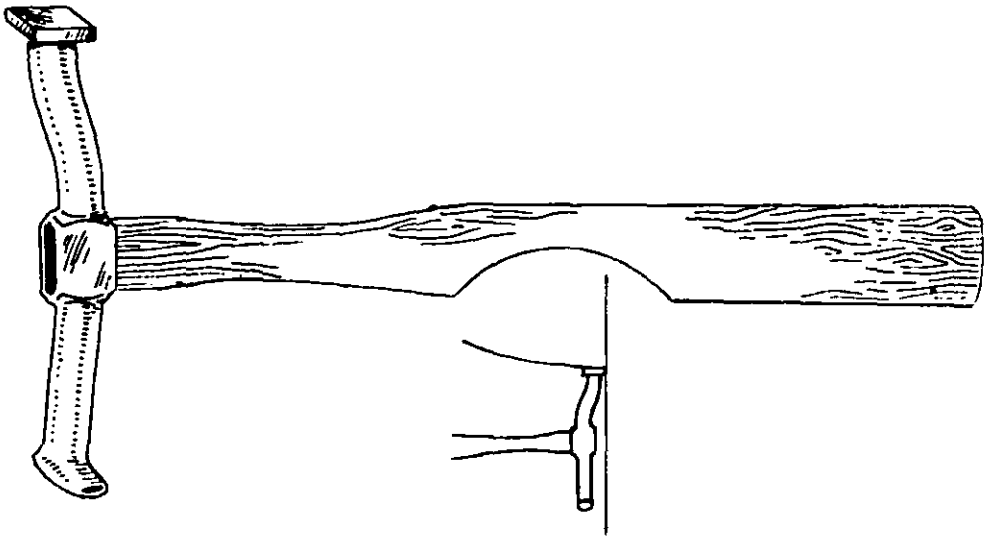


FIGURE 2.—Type I, class 1, style C hammers, bumping, finishing, offset square face and cross peen.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE II.—*Type I, class 1, style C hammers, bumping, finishing, offset square face and cross peen*

Weight without handle ±1½	Handle length ±1	Dimension across flats square face ±⅛	Dimension of peen face		Overall head length ±½
			Width of face ±⅛	Radius of crown ±1/16	
Ounces	*Inches*	*Inches*	*Inches*	*Inch*	*Inches*
12½	12	1¼	1½	⅝	6

3.8.2 *Class 2, cross and straight curved faces.* Class 2 hammer shall have one round face and one square face. The center of the eye shall be equidistant from the faces within ±⅛ inch. The square face shall have a radius curve running in line with the longitudinal axis of the handle. The round face shall have a radius curve running crosswise to the handle. The radius curves of the faces shall be approximately a 1-inch radius. The faces shall have a polished finish. The remainder of the head may have a natural finish. Class 2 hammers shall be similar to figure 3 and shall conform to the requirements specified in table III.

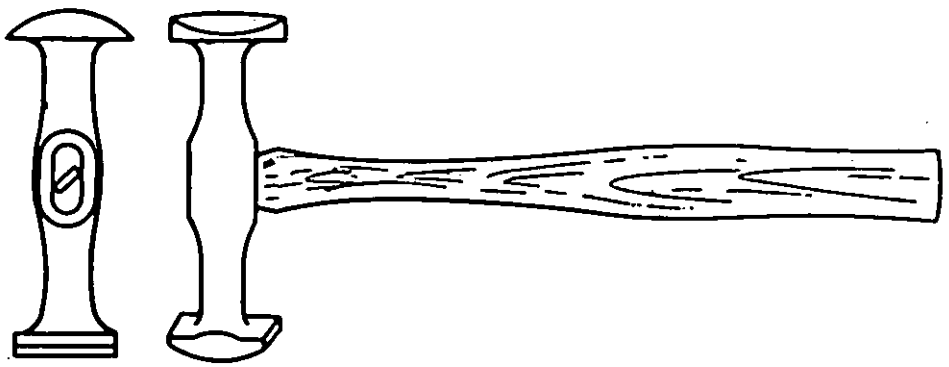


FIGURE 3.—Type I, class 2 hammers, bumping, cross and straight curved faces.

TABLE III.—*Type I, class 2 hammers, bumping, cross and straight curved faces*

Weight without handle ±1¾	Handle length ±1	Diameter of round face ±⅛	Dimension across flats, square face ±⅛	Overall head length ±1
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
10	12	1⅛	1 9/16	5
14	12	1¼	1¼	6
18	12	1 9/16	1⅜	5

3.8.3 *Class 3, cross peen (chisel).* Class 3 hammers shall have one round face and the opposite end shall have a chisel-shaped peen running crosswise to the handle. The edge of the peen shall have not more than a 1/32-inch radius. The face and not less than ½ inch from the chisel end shall be polished. The remainder of the head may have a natural finish.

3.8.3.1 *Style A, straight.* Style A hammers shall have a straight, tapered peen. Style A hammers shall be similar to figure 4 and shall conform to the requirements specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

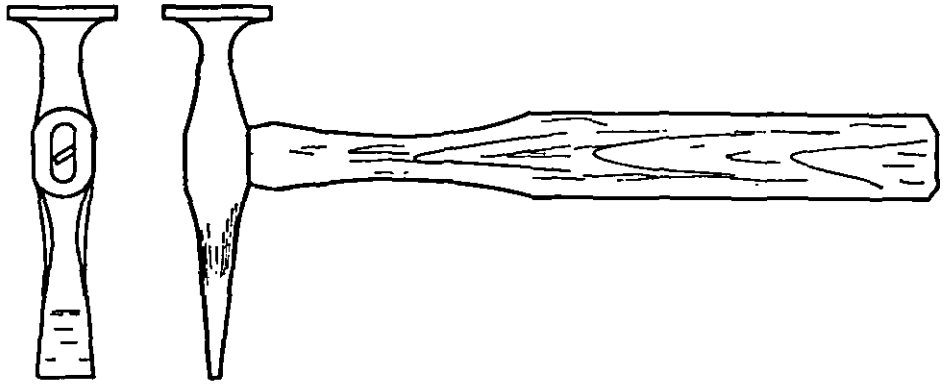


FIGURE 4.—Type I, class 3, style A hammers, bumping, cross peen (chisel), straight.

TABLE IV.—*Type I, class 3, style A hammers, bumping, cross peen (chisel), straight*

Weight without handle ±1	Handle length ±1	Diameter of round face ±3/16	Width of peen (chisel) ±1/8	Overall head length ±1/2	Center of eye to chisel end ±1/2
Ounces	*Inches*	*Inches*	*Inch*	*Inches*	*Inches*
8	12	1 5/8	5/8	5	3
12	12	1 1/2	7/8	5	3

3.8.3.2 *Style B, curved.* Style B hammers shall have a curved, tapered peen. Style B hammers shall be similar to figure 5 and shall conform to the requirements of table V.

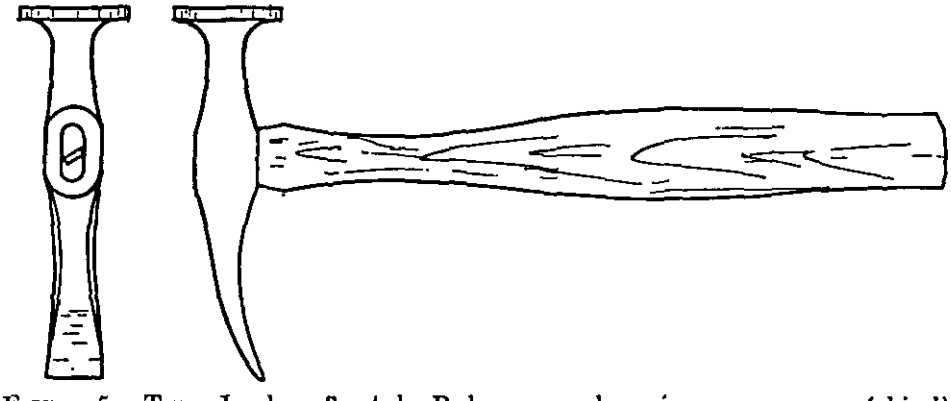


FIGURE 5.—Type I, class 3, style B hammers, bumping, cross peen (chisel), curved.

TABLE V.—*Type I, class 3, style B hammers, bumping, cross peen (chisel), curved*

Weight without handle ±1	Handle length ±1	Diameter of round face ±3/16	Width of peen (chisel) ±1/8	Overall head length ±1/2	Center of eye to chisel end ±1/2
Ounces	*Inches*	*Inches*	*Inch*	*Inches*	*Inches*
8	12	1 5/8	5/8	5	3
12	12	1 1/2	7/8	5	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.9 Type II, pick and surfacing. Type II hammers shall have one round face on one end and a pick on the opposite end. The point of the pick shall have not less than 1/32-inch or more than 5/32-inch radius. The face and not less than 3/8 inch from the point end shall be polished. The remainder of the head may have a natural finish.

3.9.1 *Class 1, round face and straight pointed pick.* Class 1 hammers shall have a straight pointed pick. Class 1 hammers shall be similar to figure 6 and shall conform to the requirements specified in table VI.

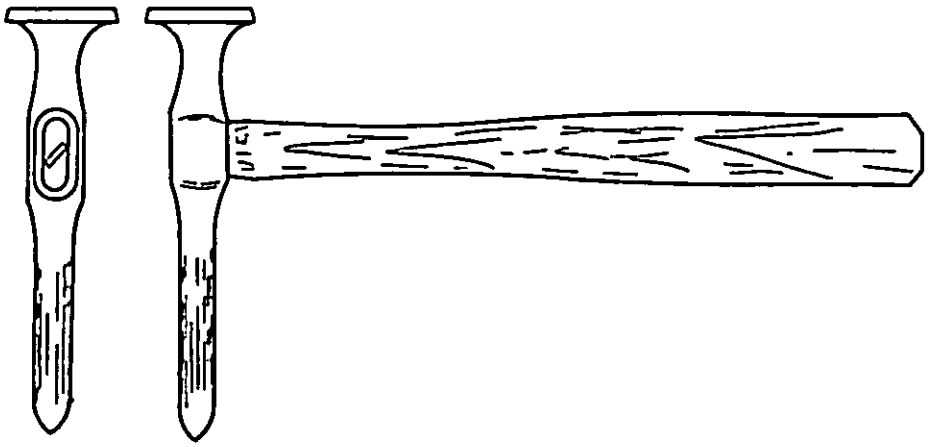


FIGURE 6.—Type II, class 1 hammers, pick and surfacing, round face and straight pointed pick.

TABLE VI.—*Type II, class 1 hammers, pick and surfacing, round face and straight pointed pick*

Weight without handle ±1	Handle length ±1	Diameter of round face ±1/8	Overall head length ±1	Center of eye to pick end ±3/4
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
9	12	1 9/16	6 1/4	4
12	12	1 9/16	6 1/4	4
15	12	1 1/2	8	6

3.9.2 *Class 2, round face and curved pointed pick.* Class 2 hammers shall have a curved pointed pick. Class 2 hammers shall be similar to figure 7 and shall conform to the requirements specified in table VII.

3.10 Type III, ding. Type III hammer faces shall be polished, except class 3. The remainder of the head may have a natural finish. The center of the eye shall be equidistant from the faces within plus or minus 1/8 inch.

3.10.1 *Class 1, square and round faces.* Class 1 hammers shall have one square and one round face. Class 1 hammers shall be similar to figure 8 and shall conform to the requirements specified in table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

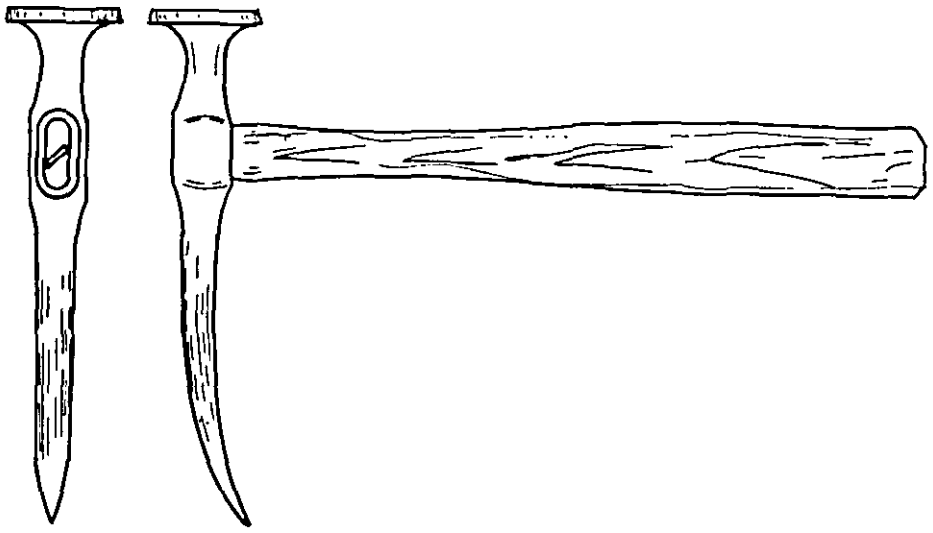


FIGURE 7.—Type II, class 2 hammers, pick and surfacing, round face and curved pointed pick.

TABLE VII.—*Type II, class 2 hammers, pick and surfacing, round face and curved pointed pick*

Weight without handle ±1	Handle length ±1	Diameter of round face	Overall head length ±1	Center of eye to pick end
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
9	12	1⅜ ± ¼	8	5⅝ ± ⅝
12	12	1½ ± ⅛	6½	4⅞ ± ½
15	12	1½ ± ⅛	8	6½ ± ½

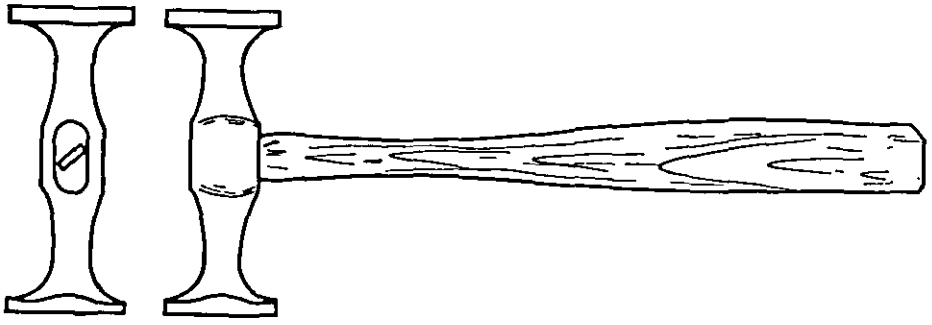


FIGURE 8.—Type III, class 1 ding hammers, square and round faces.

TABLE VIII.—*Type III, class 1 ding hammers, square and round faces*

Weight without handle ±¾	Handle length ±1	Diameter of round face ±⅛	Dimension across flats, square face ±⅛	Overall head length ±½
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
9	12	1¼	1⅛	4
10	12	1¼	1⅛	6
12	12	1⅜	1⅜₁₆	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

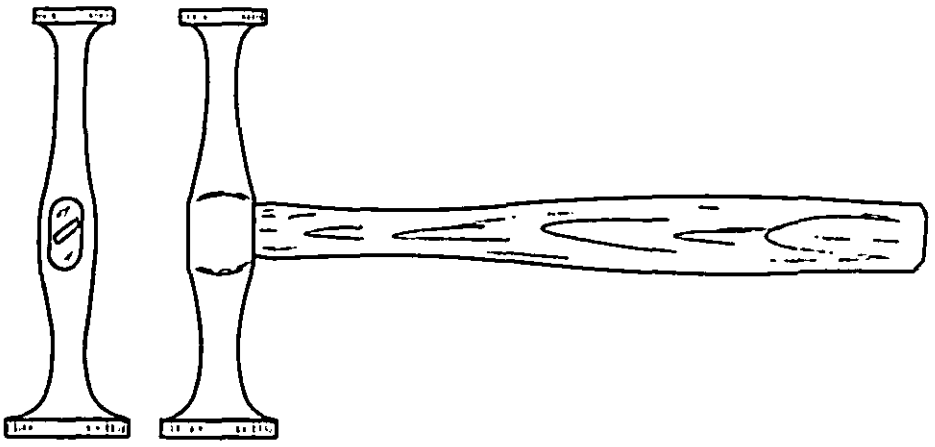


FIGURE 9.—Type III, class 2, style A ding hammers, both faces round, flat faces.

TABLE IX.—*Type III, class 2, style A ding hammers, both faces round, flat faces*

Weight without handle ±1¾	Handle length ±1	Diameter of large round face ±⅛	Diameter of small round face ±⅛	Overall head length ±½
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
12	12	1⅝	1¼	6
16	12	1 11/16	1¼	6

3.10.2 *Class 2, both faces round.* Class 2 hammers shall have both faces round.

3.10.2.1 *Style A, flat faces.* Style A hammers shall have both faces flat, shall be similar to figure 9, and shall conform to the requirements specified in table IX.

3.10.2.2 *Style B, one face convex.* Style B hammers shall have the large face flat or slightly convex and the small face convex. The arc of the convex shall have an altitude of approximately 5/16 inch. Style B hammers shall be similar to figure 10 and shall conform to the requirements specified in table X.

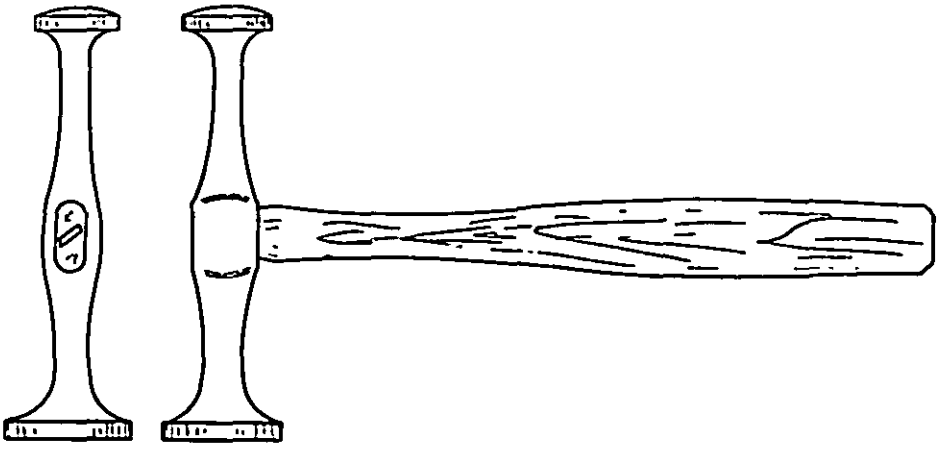


FIGURE 10.—Type III, class 2, style B ding hammers, both faces round, one face convex.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

TABLE X.—*Type III, class 2, style B ding hammers, both faces round, one face convex*

Weight without handle ±2	Handle length ±1	Diameter of large round face ±⅛	Diameter of small round face ±⅛	Overall head length ±½
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
17	12	1¾	1¼	6

3.10.3 *Class 3, shrinking.*

3.10.3.1 *Style A, both faces serrated.* Style A hammers shall have one round and one square face. Both faces shall have machine-cut checkered serrations. The remainder of the head may have a natural finish. Style A hammers shall be similar to figure 11 and shall conform to the requirements specified in table XI.

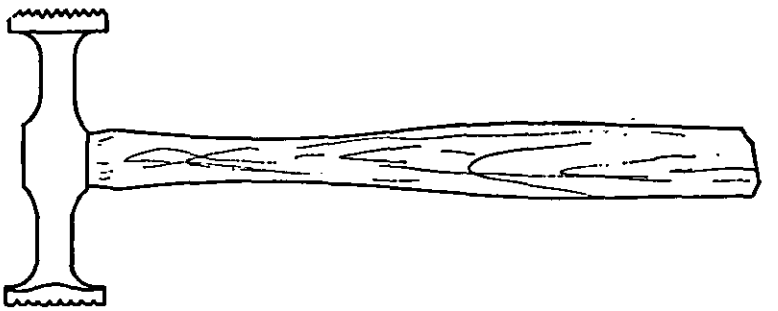


FIGURE 11.—Type III, class 3, style A ding hammers, shrinking, both faces serrated.

TABLE XI.—*Type III, class 3, style A ding hammers, shrinking, both faces serrated*

Weight without handle ±1	Handle length ±1	Diameter of round face ±5/16	Distance across flats of square face ±⅛	Overall head length ±½
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
13	12	1¾	1½	4
16	12	1¾	1⅝	4

3.10.3.2 *Style B, round face serrated.* Style B hammers shall have one round and one square face. The square face shall be polished and the round face shall have machine-cut checkered serrations. The remainder of the head may have a natural finish. Style B hammers shall be similar to figure 12 and shall conform to the requirements specified in table XII.

3.11 Type IV, utility. Type IV hammers shall have a round face on one end and a bullet-shaped blunt point on the opposite end. The point shall have a radius of not less than 3/32 inch nor more than 5/16 inch. The face, and, not less than ½ inch of the point end, shall be polished. The remainder of the head may have a natural finish. Type IV hammers shall be similar to figure 13 and shall conform to the requirements specified in table XIII.

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:36Z
Check the source to verify that this is the current version before use.

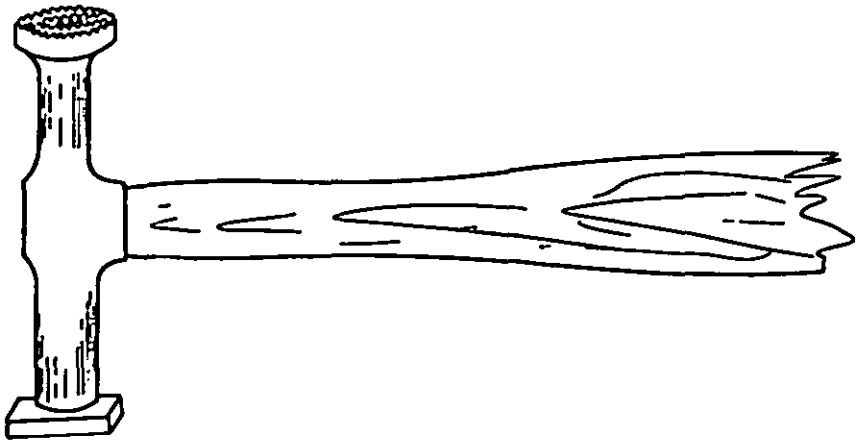


FIGURE 12.—Type III, class 3, style B ding hammers, shrinking, round face serrated.

TABLE XII.—*Type III, class 3, style B ding hammers, shrinking, round face serrated*

Weight without handle ±1	Handle length ±1	Diameter of round face ±3/16	Distance across flats of square face ±1/8	Overall head length ±1/2
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
13	12	1¾	1½	4
16	12	1¾	1⅝	4



FIGURE 13.—Type IV utility hammers.

TABLE XIII.—*Type IV utility hammers*

Weight without handle ±1	Handle length ±1	Diameter of round face ±¼	Overall head length ±¾	Center of eye to point end ±½
Ounces	*Inches*	*Inches*	*Inches*	*Inches*
8	12	1⅝	4¾	3
11	12	1½	4¾	3
14	12	1½	5½	3½

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.12 Type V, roughing out (fender bumping). Type V hammers shall be rectangular or round in shape on one end and the opposite end shall have a long curved neck terminating in a flared end or a ball peen type end. The face on the end opposite the flared end and not less than 1 inch of the flared or ball peen type end shall be polished. The remainder of the head may have a natural finish. Type V hammers shall be similar to figure 14 and shall conform to the requirements specified in table XIV.

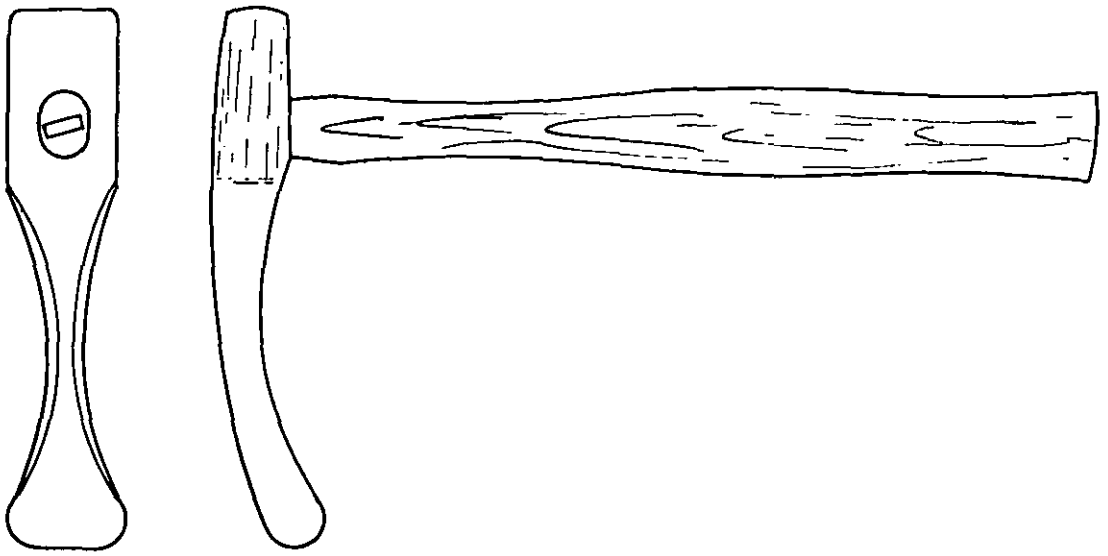


FIGURE 14.—Type V roughing out (fender bumping) hammers.

TABLE XIV.—*Type V roughing out (fender bumping) hammers*

Weight without handle ±5	Handle length ±1½	Overall head length ±1½	Center of eye to end of neck ±1½
Ounces	*Inches*	*Inches*	*Inches*
32	15	7½	7
48	16	8	7

3.13 Workmanship. Body and fender hammers shall be smoothly finished throughout and the workmanship shall be first class in every respect. Hammers shall be free from hardening checks or cracks, forging laps or pits, scale, rust, or imperfections of any nature which may adversely affect their durability or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for acceptance inspection.

4.2.1 *Inspection lot.* All hammers of the same type, class, style, and size offered for delivery at one time shall be considered a lot for purposes of acceptance examination and tests.

4.2.2 *Sampling for visual and dimensional examination.* Sample hammers shall be selected at random in accordance with Military Standard MIL–STD–105 at Inspection Level II and subjected to the examination of 4.3.1. Lots shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

be accepted or rejected in accordance with Acceptable Quality Level (AQL) 1.5 percent defective.

4.2.3 *Sampling for tests.* Sample hammers shall be selected at random in accordance with Inspection Level L–7 of Military Standard MIL–STD–105. Lots shall be accepted or rejected in accordance with Acceptable Quality Level (AQL) 4 percent defective.

4.3 Acceptance inspection.

4.3.1 *Visual and dimensional examination.* Each of the sample hammers selected in accordance with 4.2.2 shall be visually and dimensionally examined to verify compliance with all requirements of this specification which do not involve tests. Any hammer in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective hammers in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.3.2 *Acceptance tests.* Each of the sample hammers selected in accordance with 4.2.3 shall be subjected to the tests of 4.4, as applicable, to verify compliance with this specification. Any sample hammer which does not meet the requirements for any of these characteristics shall be rejected, and if the number of nonconforming hammers in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 Test procedures.

4.4.1 *Hardness test.* At least one sample hammer in each lot shall be tested for the hardness test as follows: Suitable grinding or dressing shall be performed over the area or areas to be tested so that any casehardened or forged surface as well as any decarb is removed. Hardness determinations of faces shall be made on the faces; for picks and chisel ends, the readings shall be made close to the point or edge, but not closer than ⅛ inch. Should sample hammer fail to meet hardness requirements of 48 to 58 Rockwell "C", a second hammer shall be tested; if both fail, the lot shall be rejected.

4.4.2 *Striking tests for faces, chisel ends and points.* Faces, chisel ends, and points shall not chip, crack or spall when subjected to the tests specified in 4.4.2.1, 4.4.2.2, and 4.4.2.3.

4.4.2.1 Each face, except type III, class 3, of the sample hammers under test shall be manually struck at least 12 blows by the ballpeen end of a 4-ounce machinist's ballpeen hammer. The Rockwell hardness of the ballpeen of the machinist's hammer used in testing shall be not less than 50 nor more than 60 on the Rockwell "C" scale. The hammer under test may be manually supported at the handle, or the head may be supported on any convenient rest, at the discretion of the inspector.

4.4.2.2 Each face and the point end of types IV and V hammers under test shall be manually struck 12 or more full blows on the end of a rigidly supported steel bar. The face of the test bar shall possess a hardness of not less than 92 nor more than 105 on the Rockwell "B" scale. The face of the test bar shall be smooth and either flat or slightly convex.

4.4.2.3 *Toughness test for chisel ends and points.* Chisel ends of type I, class 3, styles A and B, and points of type II, classes 1 and 2 shall be subjected to this test. The head shall be held securely by a vise or clamp with the longitudinal axis of the portion of the head under test in approximately a vertical plan and resting on a solid foundation. A steel bar possessing a Rockwell "B" hardness of not less than 92 nor more than 105 shall be held at right angles with the end under test and struck a sufficient number of blows with a heavy hammer to make an indentation in the bar at least $\frac{3}{32}$ inch deep for type II, classes 1 and 2, and at least $\frac{1}{32}$ inch deep for type 1, class 3, styles A and B.

4.4.3 *Pull apart test for hammers with fiberglass reinforced plastic handles.* The head and end of the handle shall be securely held in a standard tensile testing machine, or some other method may be employed. Hammers with heads

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

weighing over 12 ounces, nominal weight, shall not pull apart or loosen when subjected to a pulling pressure of 2250 pounds. Hammers with heads weighing 12 ounces or under, nominal weight, shall not pull apart or loosen when subjected to a pulling pressure of 750 pounds.

4.5 Inspection of preparation for delivery. The preservation, packaging, packing, and marking of the hammers shall be examined and tested to determine compliance with the requirements of section 5 of this specification, and as required by specifications referenced therein. Except as required by referenced specifications, inspection lots and sampling shall be in accordance with Military Standard MIL–STD–105, Inspection Level L7, and an AQL of 4.0 percent defective.

5. PREPARATION FOR DELIVERY

(Civil agencies. Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Cleaning, preservation, and packaging.

5.1.1 *Level A.* Hammers shall be preserved and packaged in accordance with level A of Military Specification MIL–H–15424.

5.1.2 *Level C.* Cleaning, preservation, and packaging shall be in accordance with the contractor's commercial practice.

5.2 Packing.

5.2.1 *Level A.* Hammers, packaged as specified, shall be packed in accordance with level A requirements of Military Specification MIL–H–15424.

5.2.2 *Level B.* Hammers, packaged as specified, shall be packed in accordance with level B requirements of Military Specification MIL–H–15424.

5.2.3 *Level C.* Hammers, packaged as specified, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order, interior and exterior shipping containers shall be marked in accordance with Military Standard MIL–STD–129.

5.3.2 *Civil agencies.* In addition to any special marking specified in the contract or order, each unit and intermediate package and shipping container shall be marked in accordance with Federal Standard No. 123.

6. NOTES

6.1 Intended use. The hammers covered by this specification are used for body and fender work on various makes and models of automobiles. Since many factors are involved, it is considered impractical to designate specific hammers for specific work.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type, class, and style required (see 1.2).

(*c*) Weight required (see 1.2.1).

(*d*) Fiberglass reinforced plastic handle, when required (see 3.4.3).

(*e*) Level of preservation, packaging, and packing level required (see section 5).

(*f*) Marking, if different (see 5.3).

6.3 Superseding data. Types, classes, and styles of body and fender hammers covered in this specification supersede (in part) those covered in the following specifications:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

This specification	*Superseding*
Type I, class 1, style A	Not covered.
Type I, class 1, style B	MIL–H–10462(Docks), type III.
Type I, class 1, style C	Not covered.
Type I, class 2	Not covered.
Type I, class 3, style A	GGG–H–86a, type Z.
Type I, class 3, style B	Not covered.
Type II, class 1	Not covered.
Type II, class 2	MIL–H–10462(Docks), type I.
Type III, class 1	Not covered.
Type III, class 2, style A	GGG–H–86a, type F.
Type III, class 2, style B	Not covered.
Type III, class 3, style A	MIL–H–10462(Docks), type II.
Type III, class 3, style B	Not covered.
Type IV	Not covered.
Type V	Not covered.

6.4 Transportation Description. Transportation description and minimum weight applicable to this commodity are:

Rail: Hammers, hand, not otherwise indexed by name, with or without handles.
Carload minimum weight 30,000 pounds.

Motor: Hammers, hand, not otherwise indexed, with or without handles. Truckload minimum weight (W) 30.6 pounds, (W) subject to Rule 34, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:
Army—Ordnance
Navy—Bureau of Ships
Air Force—Mobile Air Materiel Area

Copies of this specification may be purchased for .10 cents.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the currentversion before use.