GGG-J-63C
June 9, 1975
SUPERSEDING
Fed. Spec. GGG-J-63B
March 27, 1967

FEDERAL SPECIFICATION

JACK, HYDRAULIC, HAND; JACK, BUMPER (HYDRAULIC)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers remote controlled and self-contained hydraulic jacks designed for lifting and lowering loads. (For detail information see 6.1.)

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and style. Jacks shall be of the following types, classes, and styles, as specified (see 6.2):

Type I - Hydraulic, hand.
  Class 1 - Remote control (separate pump and ram).
    Style A - Solid plunger.
    Style B - Center-hole plunger.
  Class 2 - Self-contained (single base).
    Style A - Solid plunger.
    Style B - Center-hole plunger.

Type III - Bumper.
  Class 1 - Lever control.

1.2.2 Size. Jacks shall be of the size number as listed in tables I through IV, as specified (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

National Bureau of Standards (NBS) Handbook:

H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402).

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of jacks which are otherwise in accordance with the requirements of this specification.

3.2 Design and construction. The jacks covered by this specification shall be new, convenient to operate, and entirely adequate for the purpose. They shall be capable of frequent use at rated capacity without sustaining leaks or other damage that would affect serviceability. Materials used shall be those which have been used satisfactorily in jacks accepted by the industrial market, or tested and found to be equivalent or superior to materials commonly used in identical applications by representative manufacturers of jacks.

3.2.1 Capacity. The minimum capacity for jacks covered by this specification shall be the minimum weight that the jack is capable of raising to its maximum height, expressed in short tons (2,000 pounds/907.18 kilograms), and is usually the maximum rated capacity as designated by the manufacturer. The capacity ratings assume a concentric (balanced) load on the plunger head for type I jacks, and a load on the chain and hook or toe devices for type III jacks.

3.2.2 Castings. All castings shall be of uniform quality, free of blowholes, porosity, hard spots, shrinkage defects, cracks, or other defects which might adversely affect the intended use. Strength and other essential physical properties of the castings shall be adequate for the purpose intended.

3.2.3 Welding, brazing, and soldering. Welding, brazing, and soldering shall be used only where these operations are included in fabrication of the original item. When used, these processes shall be performed in accordance with good commercial practice. In no event shall such processes as peening or plugging be used on castings or forgings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.2.4 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with an adequate means for preventing loss of proper tightness and adjustment.

3.2.5 Lubrication. Each jack shall be adequately lubricated. All bearings requiring periodic lubrication shall be provided with accessible means for lubricating.

3.2.6 Safety devices. All jacks shall have a positive stop to prevent overtravel. When specified (see 6.2), special safety devices shall be provided as required by the procuring activity.

3.3 Carrying handles. Carrying handles shall be provided on all self-contained jacks and rams weighing 25 pounds (11.34 kilograms), or greater.

3.4 Hydraulic-jack oil. The hydraulic-jack oil shall operate satisfactorily in temperatures of minus 25°F. to 115°F. The hydraulic system shall be filled to normal operating level, except that for type III, class 1, the hydraulic fluid, sufficient to fill reservoir to normal operating level, may be shipped separately in a sealed metal container so as to avoid leakage from the reservoir in shipment. The hydraulic-jack oil used shall not gum or clog the valves under any operating conditions, shall not corrode the plunger or cylinder, or be injurious to the packing.

3.5 Finish. All castings, forgings, molded, or welded parts shall be thoroughly cleaned and shall be free of sand, dirt, fins, sprues, scale, flux, or other harmful extraneous materials. All external surfaces and edges shall be free of burrs, fins, and sharp edges. Unless otherwise specified (see 6.2), exposed surfaces of the jack shall be coated or finished in accordance with the manufacturer's standard practice, except that cadmium plating shall not be used.

3.6 Identification marking. Jacks shall be marked in a plain and permanent manner with the manufacturer's name, or with a U.S. registered trademark so that the source of manufacture may be readily determined. The jacks shall also be permanently marked with the rated capacity of the jack in tons and either the jack model or serial number. Unless otherwise specified (see 6.2), decals may be used for identification marking. For protection, decals shall be located on a protected area of the jack, and when specified (see 6.2), shall have an acrylic coating, or a coating of other equally suitable material.

3.7 Operating and maintenance instructions and warning plate. Operating and maintenance instructions shall be provided with each jack. A warning plate stating "CAUTION: DO NOT USE HYDRAULIC BRAKE FLUID" shall be attached near the filler plug of the reservoir of the jack when the seals and packing used in the jack are not compatible with glycol base hydraulic fluids.

3.8 Type I, hydraulic, hand. Type I jacks shall be hydraulically operated, hand-pumped jacks with a single ram (includes telescopic rams) designed for concentric loading, and shall provide force in a single direction only.

3.8.1 Type I, class 1 remote control jacks. Type I, class 1 remote control jacks shall be similar to figure 1 and consist of a hand-operated hydraulic pump, a separate ram, and a hydraulic hose assembly connecting the pump and ram. Each component shall be compatible with the others, and together, shall comprise the complete jack.



Figure 1. Type I, class 1 hydraulic, hand, remote control jack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.8.1.1 Pump. Type I, class 1 pumps shall:

(1) develop a maximum working pressure of not less than 10,000 pounds per square inch (psi) with a maximum force on the handle of 100 pounds.

(2) be equipped with a safety by-pass valve to relieve excess pressure.

(3) be capable of operation in a horizontal position, or in a vertical position with the pump head in the down position.

(4) be equipped with an internal check valve to limit the loss of pressure to not more than 1,000 psi during any 8-hour period after an initial "set" time of 5 minutes.

(5) be provided with a hand-operated pressure release valve.

(6) be provided with a hydraulic fluid reservoir with a minimum capacity of 50 cubic inches (0.866 quart) for single pumps, and 75 cubic inches (1.3 quarts) for two-speed pumps.

(7) If furnished with rams having a rated capacity over 20 tons, be of the two-speed design with an automatic change-over from high speed to low speed.

(8) be provided with feet on opposite side of reservoir from handle.

(9) be provided with a suitable handle which pivots in an arc not greater than 45° from the axis of the reservoir, and in a plane at right angle with the mounting surface of the feet.

(10) have a maximum length overall (including handle) not greater than 24 inches.

(11) weigh not more than 30 pounds.

3.8.1.2 Hose assembly. A flexible high-pressure hose assembly, capable of withstanding a pressure of 1-1/2 times the maximum working pressure of the jack, shall be furnished with each jack. The hose shall be equipped on each end with fittings compatible with connections in the pump and ram. Also, a quick-disconnect coupling shall be included in the hose assembly, and located at the ram connection end. The hose assembly shall be not less than 6 feet long.

3.8.1.3 Ram. Type I, class 1 jack rams shall operate in a single direction (push) only, and in either a horizontal or vertical position.

3.8.1.3.1 Style A. Style A rams shall be furnished with solid plungers, and conform to the requirements in table I for the size number specified (see 6.2). Unless otherwise specified (see 6.2), style B rams with center holes, which otherwise meet the requirements for style A rams, may be supplied in lieu of style A rams.

TABLE I. Type I, class 1, style A solid plunger hydraulic rams

Size number (see 6.2)	Minimum capacity (tons)	Maximum collapsed height	Minimum plunger travel	Minimum extended height	Minimum outside diameter	Maximum weight (pounds)	Method of plunger retraction
4-1	4	1-5/8	5/8	2-1/4	1-5/8	2	Manual
4-5	4	11	5	16	1-5/8	5	Spring or Manual
10-2	10	5	2	7	2-1/4	7	Spring or Manual
10-6	10	12	5-1/2	17-1/2	2-1/4	12	Spring
20-5	20	11-1/2	4-3/4	16-1/4	3-1/4	24	Spring
30-2	30	5	2	7	3-3/4	15	Manual
50-6	50	11	5-1/2	16-5/8	4-3/4	65	Spring

Dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.8.1.3.2 Style B. Style B rams shall be furnished with a plunger having a central longitudinal hole for the purpose of providing a pulling action when used with a pulling attachment, and conform to the requirements specified in the contract or order (see 6.2).

3.8.2 Type I, class 2. Type I, class 2 jacks shall be self-contained jacks, capable of being operated in either a vertical or horizontal position, and furnished with a detachable operating lever.

3.8.2.1 Operating lever. The operating lever shall be at least 19 inches long, of substantial construction, and capable of withstanding, without permanent distortion, the pressure required to operate the jack under maximum rated load.

3.8.2.2 Jack. The class 2 jack shall consist essentially of a base, pump, reservoir, cylinder and plunger, and necessary valves to produce the operating pressure required to utilize the jack at its full rated capacity. Component parts of the jack shall be capable of withstanding pressures at least 1-1/2 times the maximum working pressure.

3.8.2.2.1 Pump. The pump shall be of such design and dimensions as to produce the necessary working pressure using not more than 100 pounds of force on the operating lever. Jacks having a capacity over 25 tons shall have a pump or pumps which will enable the plunger to be raised at a high and low speed. The linkage connecting the pump piston and the operating lever socket shall be of durable construction and close tolerances so as to prevent excess looseness that could cause premature wear on the parts. The operating lever socket shall be either the single or double type unless a particular type is specified (see 6.2).

3.8.2.2.2 Base. The base shall be suitable for the size and capacity rating of the jack. Jacks over 20-ton capacity shall have a threaded connection for the attachment of a pressure gauge. The bottom side of the base shall be substantially flat, and free of wobble. The pressure-release valve shall be located in the base, and designed for easy operation using the operating lever.

3.8.2.2.3 Reservoir. The reservoir capacity shall be adequate for containing sufficient oil to extend the plunger to its maximum range under maximum load when being used in either a vertical or horizontal position. A conveniently located and leak-free filler opening shall be provided for the jack fluid.

3.8.2.2.4 Cylinder and plunger. The cylinder and plunger shall be made to close tolerances and smoothly finished to assure durability and safe performance. A positive means of preventing the plunger from being extended past its designed maximum range shall be provided. The packing or seals used shall be compatible with the jack fluid and suitable for pressures at least equal to 1-1/2 times the maximum working pressure of the jack. Unless otherwise specified (see 6.2), the method of plunger retraction shall be either manually or spring-actuated.

3.8.2.3 Style A. Style A self-contained jacks shall be similar to figure 2 and have solid plungers, and conform to the requirements of table II for the size specified (see 6.2). Unless otherwise specified (see 6.2), style B self-contained jacks otherwise meeting the requirements in table II may be supplied in lieu of style A jacks.

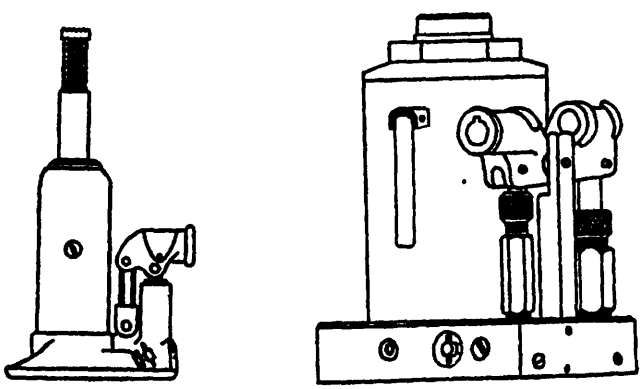


FIGURE 2. Type I, class 2, style A self-contained, solid plunger hydraulic jack.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE II. Type I, class 2, style A solid plunger, self-contained hydraulic jacks

Size number (see 6.2)	Minimum capacity (tons)	Maximum collapsed height	Minimum plunger travel	Minimum screw extension	Minimum extended height	Minimum plunger diameter	Minimum base area (sq. in.)	Maximum weight (jack only).
1-1/2-5	1-1/2	7-1/4	5	2	14	7/8	17	12
3-6	3	9	5-7/8	2	16-7/8	1	21	20
3-8	3	10	7-1/2	3	20-1/2	1	25	20
8-6	8	9	6-1/4	4-1/4	19-1/2	1-1/2	30	24
12-5	12	9	5	3	17	1-3/4	33	35
20-6	20	11	5-7/16	None	16-7/16	2-1/4	38	50
20-22	20	28	21-1/2	None	49-1/2	2-1/4	75	140
30-7	30	11	7	None	18	2-1/2	50	75
50-6	50	12	6	None	18	3-3/8	75	130
50-26	50	26	20	None	46	3-3/4	75	210

Dimensions are in inches

3.8.2.4 Style B. Style B self-contained jacks shall be similar to figure 3 and have a plunger having a central longitudinal hole for the purpose of providing a pulling action when used with a pulling attachment, and conform to the requirements in table III for the size number specified (see 6.2).

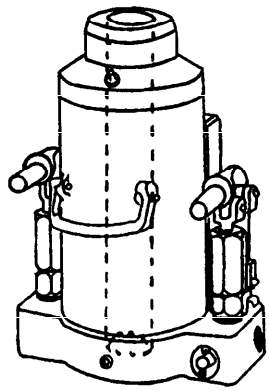


FIGURE 3. Type I, class 2, style B center-hole plunger, self-contained hydraulic jack.

TABLE III. Type I, class 2, style B center-hole plunger, self-contained jacks

Size number (see 6.2)	Minimum capacity (tons)	Maximum collapsed height	Minimum plunger travel	Minimum extended height	Center hole diameter	Effective plunger area (sq. in.)	Maximum weight (pounds)
30-6	30	13	6	19	1-1/8	6.53	46
80-3	80	10	3	13	3-1/8	16.41	90
100-3	100	10	3	13	2-1/8	22.33	90

Dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.9 Type III, bumper (automobile).

3.9.1 Design and construction. Type III jacks shall be of such design as to permit their efficient use on the conventional and current models of automobiles. They shall consist essentially of a compact hydraulic unit including a pump and necessary valves and mechanisms enclosed within and protected by a malleable iron or steel housing. Jacks shall stand upright on a level surface or they may have a swivel-type base of malleable iron or pressed steel adequately secured. When the jacks are properly located, they shall operate easily and efficiently. The swivel-base jacks need not stand upright alone.

3.9.2 Hydraulic unit. The hydraulic unit shall operate by means of an operating handle (lever) moving in a vertical direction. The operation of the jack shall be controlled under all service conditions by a hand-operated screw valve, which shall be conveniently located with respect to the operating lever. The lowering of the jack and load shall be safely controlled by the screw valve. The handle operating lever shall operate the jack by short strokes to effectively raise the load with each stroke. Suitable means shall be provided to prevent leakage of any kind from the hydraulic system while it is under maximum working and test pressures, or when the jack is standing idle in normal working position, or lying in a horizontal position.

3.9.3 Mechanical device. Jacks shall have a simple, positive, and safe hand-operated mechanical device, toe, or suitable chain and hook of malleable iron or steel. The toe device or chain and hook shall be capable of being easily raised or lowered and securely locked within its limits, for purposes of engaging and supporting the bumper or its supporting members, for raising the load. The supporting device, toe, or chain and hook shall be capable of being rotated to any angle in a horizontal plane, and shall be so shaped (designed) as to prevent the bumper or any of its component parts from slipping or dropping off while under load. The chain and hook shall be of suitable strength and length for the test loads.

3.9.4 Type III, class 1 jacks shall conform to table IV, and be similar to figure 4.

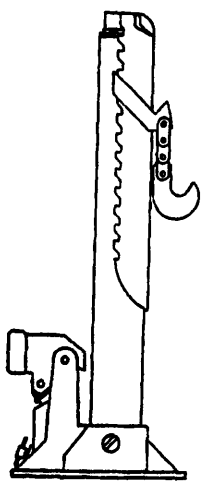


FIGURE 4. Type III, class 1, bumper, lever-control.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:36Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Type III, class 1, lever-control jacks

Size number (see 6.2)	Rated capacity	Lowest adjustable toe or chain height (maximum)	Highest adjustable toe or chain height (minimum)	Hydraulic rise (minimum)	Overall length of jack (raised) (minimum)	Overall length of jack (closed) (maximum)	Weight of jack (maximum)	Base size (minimum)
	Tons	Inches	Inches	Inches	Inches	Inches	Pounds	Square Inches
1-1/2-17	1-1/2	6	12	17	32	27	23	15-1/2

3.10 Workmanship. Jacks shall be free from defects which could possibly impair safety of operation or performance. All sharp edges and burrs shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table V.

TABLE V. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level (AQL)	AQL expressed in terms of	Reference
Visual examination	1 each	II	10	Defects per 100 units	4.3.1
Dimensional and weight examination	1 each	S-2	10	Defects per 100 units	4.3.2
Testing	1 each	S-2	4.0	Defects per 100 units	4.4 through 4.4.4
Inspection of preparation for delivery	One container	S-2	4.0	Defects per 100 units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional and weight examination. Each sample unit shall be examined for any nonconformance to dimensional and weight requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.1 Performance test procedures. Each of the sample jacks shall be subjected to the load tests specified in 4.4.2 and 4.4.3. Jacks and their component members shall show no mechanical defects or ineffective operation and shall not fail, fracture, take permanent set, or show any evidence of instability, bending, shearing, or undue or excessive wear. Jacks and their component control devices and trip mechanism shall operate properly and effectively, and there shall be no mechanical or hydraulic defects at the completion of tests.

4.4.2 Load tests. Each sample jack shall support the respective test loads specified in table VI. The jack shall be in a vertical position and the load shall be balanced. The load shall be applied at any position designated by the inspector within the specified rise of the jack.

TABLE VI. Load tests

Rated capacity	Test-load support Head, saddle (cap), lift	Test sustain load for 10 minutes
Tons	Tons	Tons
1-1/2	1-3/4	1-3/4
3	3-1/2	3-1/2
4	4-1/2	4-1/2
8	9	9
10	11	11
12	13	13
20	22	22
30	33	33
50	55	55
80	88	88
100	110	110
1-1/2	1-3/4	1-3/4

4.4.3 Load-sustaining tests. Each sample jack shall sustain (support) for 10 minutes the respective test loads specified in table VI. The load shall be applied approximately 1/8 inch below its highest rise. All hydraulic jacks shall support their test-sustain load without lowering the load in excess of 3/16 inch in 10 minutes. The jack shall be in an upright position and the applied load shall be balanced.

4.4.3.1 Production testing. For production testing the time requirement for sustaining the test load may be reduced to one minute provided the jack(s) under test show no indication of leakage at the end of the one minute test period. When test facilities are not available for testing either one complete type III, class 1 jack, the sample jack may be tested in two sections, one section to consist of the hydraulic jack and the other section to consist of the hook and chain assembly, provided that each section is tested in such manner to insure testing of all lifting components of the complete jack.

4.4.4 Safety device test. Jacks shall be tested to determine compliance with 3.2.6 and 3.8.1.1 (2).

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. The jacks shall be preserved, packaged, packed, and marked in accordance with PPP-P-40. The level of packaging shall be A, B, or C, the level of packing shall be A, B, or C, and the marking shall be civil or military, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The jacks covered by this specification are intended for general application. When jacks are to be used in "lift slab construction" applications, special safety requirements as required by the Department of Labor Occupational Safety and Health Act (paragraph 1926.305) must be specified in the contract or order (see 3.2.6).

6.1.1 Type I jacks are for use in tight places or when multiple rams are required for lifting, pulling, or pushing operations.

6.1.2 Type II jacks contain the pump and plunger in a single unit and are usually used for lifting loads when the size of the jack is not too critical, or when the single unit jack is preferred.

6.1.3 Style A jacks with solid plungers are used for pushing (raising) loads in a single direction.

6.1.4 Style B jacks can be used for pushing loads, or with the aid of pulling attachments, loads may be pulled.

6.1.5 Type II jacks are primarily used for raising one wheel of an automobile.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and style and size number as applicable (see 1.2).
(c) Special safety devices, when required (see 3.2.6).
(d) Finish requirements, when different (see 3.5).
(e) When decals are not acceptable (see 3.6).
(f) When coated decal is required (see 3.6).
(g) When style B jacks are not acceptable substitute for style A jacks (see 3.8.1.3.1 and 3.8.2.3).
(h) Requirements for type I, class 1, style B jacks (see 3.8.1.3.2).
(i) When either a single or double lever socket is required (see 3.8.2.2.1).
(j) When method-of-plunger-retraction requirement is other than manually or spring-actuated (see 3.8.2.2.4).
(k) Selection of applicable level of packaging, packing, and marking (see 5.1).

GGG-J-63C	GGG-J-63B
Type I - Hydraulic, hand.	Type I - Hydraulic, hand.
Class 1 - Remote control.	Class 1 - Remote control.
Style A - Solid plunger.	Style A - General purpose, heavy duty.
Style B - Center-hole plunger.	(Not covered in revision B)
Class 2 - Self-contained (single base).	Class 2 - Self-contained.
Style A - Solid plunger.	Style A - General purpose, heavy duty.
Style B - Center-hole plunger.	
(Previous class 3 is now class 2, style B.)	Class 3 - Push-pull (center hole, self-contained).
Deleted. (See GGG-J-1564)	Type II - Dolly type, hydraulic.
Deleted.	Class 1 - Two-speed.
Deleted.	Class 2 - Single-speed.
Deleted.	Class 3 - Hand truck, lever control (axle type).
Type III - Bumper.	Type III - Bumper (automobile).
Class 1 - Lever control.	Class 1 - Lever control.
Deleted.	Class 2 - Sleeve control.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

6.4 Accessories. Accessories for using style B, center hole jacks in pulling applications and jack fluid are not included in this specification and should be ordered separately from the manufacturer of the jack.

MILITARY INTEREST:

Custodians:
Army - GL
Navy - YD
Air Force - 84

Review activities:
Army - ME

User activities:
Army - AT, CE
Navy - SH

Preparing activity:
GSA-FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.