GGG-S-51D
November 12, 1969
SUPERSEDING
Int. Fed. Spec. GGG-S-0051C(NAVY-Ships)
October 26, 1966 and
Fed. Spec. GGG-S-51B
September 19, 1957

FEDERAL SPECIFICATION

SAW, CIRCULAR, PORTABLE, ELECTRIC

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers portable, electric circular saws.

1.1.1 Federal specification coverage. This specification covers only the types of portable electric handsaws generally purchased by the Federal Government and is not intended to include all of the types which are commercially available.

1.2 Classification.

1.2.1 Types. The portable electric saws shall be of the following types, as specified (see 6.2):

Type I. Motor armature axis parallel to the saw-blade-spindle axis.
Type II. Motors armature axis at right angles to the saw-blade-spindle axis.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-B-440 - Blade, Circular Saw, Woodcutting.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:36Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant (For the Treatment of Communications; Electronic, and Associated Electrical Equipment).

MIL-H-15424 - Hand Tools; Packaging of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1338 - Electric Portable Hand Tools General Suppression System Design Requirements.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids, or request for proposal shall apply:

National Bureau of Standards (NBS) Handbook:

H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

American National Standards Institute (ANSI), Inc. Standards:

B3.5 - Tolerances for Ball and Roller Bearings.
B3.6 - Boundary Dimensions for Ball and Roller Bearings.
B3.8 - Mounting Ball and Roller Bearings.

(Application for copies should be addressed to American National Standards Institute, Inc., 1430 Broadway, New York, N.Y. 10018.)

The Anti-Friction Bearing Manufacturers' Association (AFBMA) Standards:

Section No. 5 Bearing Identification Code for Anti-Friction Ball and Roller Bearings.

(Application for copies should be addressed to The Anti-Friction Bearing Manufacturers' Association, Inc., 60 East 42nd Street, New York, N.Y. 10017.)

Underwriters' Laboratories (UL), Incorporated Standards For Safety:

No. 45 - Electric Tools.
No. 498 - Attachment, Plugs and Receptacles.

(Application for copies should be addressed to Underwriters' Laboratories, Incorporated, 207 East Ohio Street, Chicago, Illinois 60611; 1285 Walt Whitman Road, Melville, Long Island, New York 11746; 333 Pfingsten Rd., Northbrook, Ill. 60062 and 1655 Scott Blvd., Santa Clara, Calif. 95050.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of portable electric saws which are otherwise in accordance with the requirements of this specification.

3.2 First article inspection. When specified (see 6.2), the contractor shall furnish a completely fabricated portable electric saw for first article inspection in accordance with 4.2. The sample shall be a first article item or a production item which meets the requirements of this specification. In either case, the sample shall be identical with the proposed items and shall be made or shall have been made by the methods that are to be used or were used in production of items to fulfill the terms of the contract. Approval of a first article sample shall not relieve the contractor of the responsibility to furnish equipment in accordance with the requirements of this specification.

3.3 Material. All materials used in the fabrication of the circular saw shall be new and of the quality necessary to produce a circular saw to meet the requirements described herein.

3.4 Design. The circular saw and its accessories shall be of the manufacturer's current design. The design shall be such as to provide convenient and safe operation. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment and repair.

3.4.1 Safety devices. Circular saws shall be designed with safety devices as specified in UL45

3.4.1.1 Kick-back devices. Saws shall be provided with a device for preventing injury to operator and damage to tool in case of saw jamming in work piece during a cut.

3.4.2 Lubrication. All bearings (except sealed-for-life type) and mating gears shall be provided with a means of lubrication. Gears shall operate in a lubricant which shall be prevented from leakage from the gear casing or entering the motor enclosure. Parts requiring protection from dust shall be enclosed.

3.4.3 Interchangeability. All parts from the same manufacturer shall be manufactured to standards which will permit replacement or adjustment without modification of parts or machine.

3.5 Construction. The circular saw shall be free of any characteristics or defects which will prevent the circular saw from passing the examinations or tests specified in section 4. The circular saw shall be complete so that when connected to the specified source of power, it can be used for any operation for which it was designed.

3.5.1 Castings. All castings shall be free from defects or mismatching. In no event shall such processes as welding, peening, plugging or filling with cold solders or metallic pastes be used on castings for reclaiming any parts of the saw.

3.5.2 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with means of preventing loss of tightness. All such parts, when subject to removal or adjustment, shall not be swaged, peened, staked, or permanently deformed. Threaded parts shall be in the inch system and conform to H28.

3.5.3 Surfaces. Surfaces of all castings, forgings, and molded parts shall be clean and free of sand, dirt, fins, sprues, scale, flux, or other harmful or extraneous materials. External surfaces shall be smooth and all edges shall be rounded or beveled. Surface finish shall be manufacturer's standard practice.

3.5.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where those operations are included in the fabrication of the original design. Those techniques shall not be employed as repair measures for defective parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.5.5 Gears and shafts. Gears shall be alloy steel. Where worm gearing is used, the gearing may consist of a steel worm and bronze worm wheel. All gears shall have machine cut or roll formed teeth and be designed and supported to efficiently transmit imposed loads. Shafts shall be of alloy steel supported by at least two bearings to prevent deflection. Gears and shafts shall be fully enclosed.

3.5.6 Bearings. All rotating parts of the saws shall be provided with precision quality commercially available ball and roller bearings. For definition of needle roller bearings, see 6.3. Armature shafts shall be mounted in ball or roller bearings. Rotating shafts other than armature shafts, shall be mounted in ball, roller, or needle roller bearings. Roller or needle roller bearings which are designed primarily for radial loads shall not be used to absorb thrust. Roller or needle roller bearings may be used only when hardness of shaft supported, provision for thrust loading, sealing and shielding are operationally adequate. Steel inserts may be omitted in the mounting of bearings when sufficient contact area and a suitable fit between bearing outer diameter and housing is provided. Bearings shall be of the dustproof sealed type or shall be mounted in a dustproof housing. Ball, roller and needle roller bearings shall conform to ANSI B3.5 for tolerances, B3.6 for dimensions, B3.8 for mounting requirements and AFBMA Section No. 5 for identification.

3.6 Component parts. Saws furnished under this specification shall consist of housings, handles, motor, electrical equipment, base, and accessories.

3.6.1 Housings. Housings shall be of a material of suitable characteristics to withstand stresses imposed by normal usage. Housings shall include the motor case, reduction gear mechanism, and blade guards.

3.6.1.1 Handles. Handles shall be pistol or closed grip so designed and positioned to provide a comfortable grip and facilitate ease of operation. Handle shall conveniently house a trigger switch in a protected position.

3.6.1.2 Auxiliary handle. An auxiliary handle or knob shall be provided to facilitate two-handed operation of sizes 10 and 12-inch saws.

3.6.2 Electrical equipment. All electrical components including motors, switches, and wiring shall conform to applicable requirements of UL45 in addition to the requirements specified for the following components.

3.6.2.1 Motor. Motor shall be universal type designed to operate on either 115 volt, direct current or 115 volt (± 6 percent), single phase, 25 - 60 cycle alternating current. Motor shall be mounted integral with the tool. The motor armature shall be balanced dynamically to insure freedom from destructive vibration.

3.6.2.2 Commutators. Commutators shall have "V" ring and sheet mica or molded mica construction. Molded commutators shall be of material that will withstand maximum rotational forces and be immune to deformation from temperatures encountered in service.

3.6.2.3 Switch. A two-pole single-throw, instant-release trigger switch shall be provided and mounted in the saw handle. The switch shall be provided with a guard to prevent accidental actuation. The switch shall not be equipped with a mechanism for locking in the "ON" position. Mechanisms for locking in the "OFF" position are acceptable.

3.6.2.4 Wiring. All wiring, flexible cord, attachment plug cap, and grounding means shall be in accordance with UL45 requirements. The cord shall have an attachment plug cap and unless otherwise specified (see 6.2), a minimum free length of 8 feet measured from point of entry into the saw. Attachment plug cap shall conform to UL498 requirements for two-pole, 3-wire grounding devices rated 15 amperes, 125 volts.

3.6.3 Base. Saws shall be provided with a metal base designed to support the saw against the material being cut and provided with adjustments for cutting depth and angle of cut. Base design shall include means for mounting a rip fence on either side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.6.3.1 Rip fence. Each saw shall be furnished with an adjustable rip fence to fit the base. Fence shall be graduated in increments of 1/4 inch or less and marked each inch to indicate a ripped width up to at least 6 inches. Graduation shall indicate distance inside of blade to edge of rip fence.

3.6.3.1.1 Position indicator. Provisions shall be made on the saw base to clearly indicate point of saw blade contact with work at the zero-angle and 45° angle adjustment.

3.6.3.1.2 Angle adjustment. Provision shall be made for adjustment of the base from 0 to 45° angle. A graduated angle scale shall clearly indicate the angle in increments of not more than 5° from 0 through 45°. Provision shall be made for making angle adjustment without use of tools except for the 12-inch saw which may be equipped with a clamping device that is activated and clamped by mechanical means other than a hand knob if the wrench provided for clamping can be attached to the tool for semi-permanent storage.

3.6.3.1.3 Depth adjustment. The base shall be readily adjustable to control the depth of cut within the cutting capacity specified herein for the type and size specified (see 6.2). Base adjustment shall be accomplished without the use of special tools.

3.6.4 Dust blower. The saw shall be provided with a dust blower having sufficient air output for clearing sawdust from the line of cut and away from the operator.

3.6.5 Spindle arbor. The saw shall be provided with a round saw-blade arbor conforming to the requirements specified herein for the type and size specified in tables I and II. The saw arbor shall be provided with a means for fastening the blade to arbor so as to transmit full motor spindle output and shall be of such design, spindle nut will not become loose in operation or excessively tight should blade be stalled in operation.

3.6.6 Saw blades. Each saw shall be furnished with one combination flatground saw blade conforming to GGG-B-410, except for the diameter tolerance, as specified herein.

3.6.7 Rotation. Saw blade rotation shall be such that the material being cut will be held against saw base by the cutting action of the blade. Director of blade rotation shall be permanently and clearly indicated by an arrow on the saw-blade guard or housing when viewed from the spindle end.

3.7 Type I saw. Type I saws shall be heavy duty type similar to figure 1, with the motor armature axis parallel with saw-blade-spindle axis.

3.7.1 Sizes and capacities. Type I saws shall conform to the requirements of table I for the size specified (see 6.2).

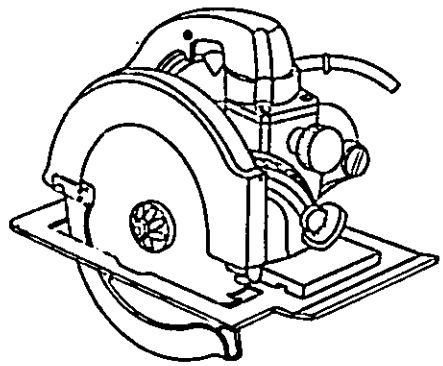


FIGURE 1. Type I portable, electric, circular saw, motor axis parallel to saw-blade-spindle axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.8 Type II saw. Type II portable electric saws shall be heavy duty, similar to figure 2, with the motor armature axis at right angles to the blade-spindle axis.

3.8.1 Sizes and capacities. Type II saws shall conform to the requirements of table II for the size specified (see 6.2).

3.8.2 Components. Type II saw components shall be similar to and comply with the requirements specified herein, except handles shall be closed grip with an auxiliary handle or knob provided for two-handed operation.

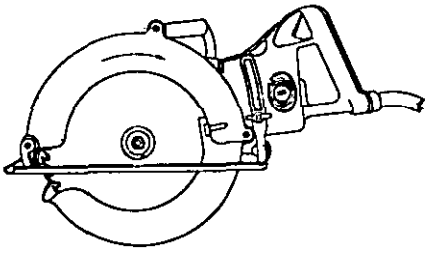


FIGURE 2. Type II portable, electric, circular saw, motor axis at right angles to saw-blade-spindle axis.

TABLE I. Type I saw requirements

Size	Blade diameter	No-load blade speed minimum	Cutting capacity 90° at least	Cutting capacity 45° at least	Cutting capacity Minimum cutting range	Power output at spindle minimum	Rated current minimum	Blade arbor hole diameter	Weight (including cord) 1/ maximum
Inches	Inches	R.P.M.	Inches	Inches	Inches	HP	Amps	Inch	Pounds
6	6-6-1/4	3400	2	1-1/4	0 to 1/2	1/2	7	5/8	15
7	7-7-1/4	4200	2-1/8	1-3/4	0 to 1/4	1/2	8	5/8	18
8	8-8-1/4	4000	2-5/8	1-7/8	0 to 1	3/4	9	5/8	20
10	10	3800	3-3/8	2-1/4	0 to 1-1/4	1-1/8	12	3/4	35
12	12	3500	4-1/4	3	0 to 2	1-1/2	15	3/4	40

1/ UL approved power cord.

TABLE II. Type II saw requirements

Size	Blade diameter	No-load blade speed minimum	Cutting capacity 90° at least	Cutting capacity 45° at least	Cutting capacity Minimum cutting range	Power output at spindle minimum	Rated current minimum	Blade arbor hole diameter	Weight (including cord) 1/ maximum
Inches	Inches	R.P.M.	Inches	Inches	Inches	HP	Amps	Inch	Pounds
8	8-8-1/4	4200	2-5/8	1-7/8	0 to 1/4	3/4	9	5/8	18
10	9-7/8-10	2900	3-3/8	2-1/4	0 to 1-1/4	1-1/8	12	3/4	32
12	11-7/8-12	2500	4-1/4	3	0 to 2-3/8	1-1/2	15	3/4	36

1/ UL approved power cord.

3.9 Accessory equipment. Saws shall be supplied with such maintenance tools, accessories, and extra parts as normally furnished commercially. One set of spare motor brushes and one arbor nut wrench shall be included with each saw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.10 Carrying case. Each saw shall be provided with a carrying case. The carrying case shall be of at least 22 gauge sheet steel and of a rigid construction. Provisions shall be made for securely retaining the cover when enclosed. The case shall be of ample size and designed to hold the saw and accessories in a fixed position. The interior and exterior surfaces of the carrying case shall have a durable coating of paint or enamel. The case shall be marked with the manufacturer's name or trademark and saw size.

3.11 Identification plate. A corrosion-resistant metal plate permanently and legibly marked to indicate the following information shall be securely attached to the saw:

(a) Manufacturer's name or trademark.
(b) Manufacturer's model or serial number.
(c) Voltage.
(d) Rated-load (amperes).
(e) No-load r.p.m.
(f) Frequency.
(g) Arbor diameter, blade capacity.
(h) Blade diameter, blade capacity.

3.12 Weight. The weight of the saw complete, including UL approved power cord, shall not exceed the requirements specified in tables I and II for the size specified (see 6.2).

3.13 Electromagnetic interference suppression. When specified (see 6.2), each saw shall be electromagnetic interference free within the limits specified for portable electric tools in compliance with the requirements of MIL-STD-1377.

3.14 Fungus proofing. When specified (see 6.2), the electrical circuitry, including all components and connections, shall be protected from the effect of water and fungus growth by an overall treatment with a varnish conforming to MIL-V-173, with the following exceptions:

(a) Components or circuit elements which are inherently fungus and water resistant or which are hermetically sealed, need not be treated.

(b) Components or circuit elements whose function will be adversely affected by the varnish coating shall not be treated. When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry film thickness of 0.001 inch to component or element surface previously cleaned and prepared in accordance with commercial practice.

3.15 Handbook of instructions. Unless otherwise specified (see 6.2), the manufacturer shall supply one copy of his regular instructions and parts list with each saw. The book shall include all illustrations, instructions and necessary data for safe operation, adjustment, or repair. Parts list shall include manufacturer's part numbers and ordering instructions.

3.16 Workmanship. Workmanship of the saw and accessories shall be of the quality prevailing among manufacturers normally producing saws of the types specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements, as specified herein. Except as otherwise specified in the contract, or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. First article inspection shall be applied to the first article sample submitted in accordance with 3.2. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.4.1, and all tests in 4.5. Failure of the first article sample to pass the examination or one or more first article tests shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

4.3 Sampling for quality conformance inspection.

4.3.1 Lot. All saws of the same type and size offered for delivery at one time shall be considered a lot for purposes of quality conformance inspection.

4.3.2 Sample. A random sample shall be selected from each lot in conformance with MIL-STD-105 at inspection level I.

4.4 Quality conformance inspection. Quality conformance inspection shall be performed on each sample saw selected in accordance with 4.3.2. Quality conformance inspection shall consist of the following:

(a) Examination (4.4.1).
(b) Tests (4.5.1 through 4.5.4).
(c) Inspection of preservation, packaging, packing, and marking for shipment and storage (4.6).

4.4.1 Examination. Each saw selected in accordance with 4.3.2 shall be examined to determine compliance with the requirements of this specification. Examination shall be conducted in accordance with table III. Acceptable quality level (AQL) to be as indicated. Nonconforming saws shall not be offered for delivery and if the nonconforming saws in any one sample exceed the acceptance number for that sample, the lot represented shall be rejected.

TABLE III. Classification of defects

Categories	Defects
Critical:	AQL 0.10 percent defective
001	Not safe from electric shock or fire hazard.
002	Moving parts improperly guarded.
003	No kick-back device.
Major:	AQL 2.5 percent defective
101	Saws not of type or size specified.
102	Component parts missing, damaged, defective, or not as specified.
103	Cable assembly not as specified.
104	Wiring not as specified.
105	Gears, shafts, and bearings not as specified.
106	Base adjustment not as specified.
107	Evidence of lubricant leakage.
108	Rip fence not graduated as specified.
109	Position indicator not as specified.
110	Angle adjustment not as specified or requires tools. Depth adjustment not as specified or requires tools.
111	Dust blower not provided.
112	Spindle arbor not of diameter specified or spindle nut becomes loose or tightens in operation.
113	Blades not of type specified.
114	Blade rotation not indicated as specified.
115	Evidence of poor workmanship.
Minor:	AQL 4 percent defective
201	Identification plate not as specified.
202	Handbook or parts list missing or not the type specified.
203	Carrying case not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.2 Tests for quality conformance. Each sample selected in accordance with 4.3.2 shall be tested for compliance with the requirements of this specification. The AQL shall be 2.5 percent defective. Nonconforming saws shall not be offered for delivery and if the number of defective units exceeds the acceptable number for the samples tested, the lot represented shall be rejected. Quality conformance tests shall consist of the tests specified in 4.5.1 through 4.5.4.

4.5 Tests.

4.5.1 Electromagnetic interference test certification. When required, the manufacturer shall provide certification that the suppression network in the saws offered conform to the requirements of 3.13 or are identical to that of saws previously tested and approved.

4.5.2 Motor tests. Motor shall be tested in accordance with UL45 to determine compliance with the requirements specified for universal motors for electric tools for the following:

(a) Dielectric strength.
(b) Current input.
(c) Continuity of grounding connections.

4.5.3 Operational test. Sample saws selected shall be operated twenty (20) minutes at no-load operation. After the no-load operational period rated load conditions (rated current, frequency and voltage) shall be in conformance with UL45 requirements. The saw shall be operated at rated load for a period of twenty (20) minutes. During the test, the saw shall be checked for switch operations and loss of lubricant.

4.5.4 Performance test. Each sample saw selected shall be operated at no-load for a period of fifteen (15) minutes. After the no-load period the saw shall be operated at rated load. When operating temperatures are constant (thermal equilibrium, rated load current, frequency and voltage shall comply with UL45 requirements) the saws shall be operated at rated load for a period of one (1) hour. Saws shall be tested to determine compliance with UL45 requirements for:

(a) Temperature rise.
(b) Current input.
(c) Insulation resistance.
(d) Leakage current (shall not exceed 5 milliamperes).

After test determinations have been completed, operational components, including motor, bearings, and gears shall be examined for wear, insecure fastenings, and evidence of lubricant leakage, if applicable.

4.6 Inspection of preservation, packaging, packing, and marking for shipment and storage. Preservation, packing, and marking shall be examined to determine conformance with the documents referenced in section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Preservation, packaging, and packing shall be in accordance with the requirements of MIL-H-15424 for general use portable, electric grinders. Levels of preservation, packaging and packing shall be as specified (see 6.2).

5.2 Marking.

5.2.1 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.2.2 Civil agencies. In addition to any special marking specified in the contract or order (see 6.2), each unit and intermediate package and shipping container shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. Portable, electric saws as furnished under this specification are hand-guided saws intended primarily for cross-cutting, and rip-sawing wood product at angles from 0 to 45°. By use of special saw blades, ferrous and nonferrous metals, masonry and ceramic materials may also be cut.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the currentversion before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and size of saw required (see 1.2.1, 3.6, and 3.7).
(c) First article approval, if required (see 3.2 and 4.2).
(d) Length of cord, if different (see 3.6.2.4).
(e) Instruction book requirements, if different (see 3.15).
(f) When electromagnetic interference suppression is required (see 3.13).
(g) When fungus proofing is required (see 3.14).
(h) Levels of preservation, packaging, and packing required (see 5.1).
(i) Additional marking, if required (see 5.2).

6.3 Definition of bearings, needle roller. A needle roller bearing is a cylindrical roller bearing with or without a device (cage) for keeping the rollers separate, and with cylindrical rollers 1.985 mm (0.07814 in. approx.) to 5.015 mm (0.1974 in. approx.) in diameter. The overall length of the rollers being at least 2.5 times the diameter if the ends are appreciably chamfered, rounded, or reduced, or at least 3 times the diameter if the ends are substantially flat and square with the axis. (From "Rolling Bearing" by R. K. Allen, London, England, Sir Issac Pittman and Sons Ltd. 1945).

6.4 First article inspection.

6.4.1 Invitations for bids should provide that the Government reserves the right to waive the requirement for first article inspection samples as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

MILITARY INTEREST:

Custodians:

Army - GL
Navy - SH
Air Force - 84

Review activities:

Army - GL
Navy - SH
DSAH - GS

User activities:

Army - CE, EL
Navy - MC, YD

Preparing activity:

Navy - SH

CIVIL AGENCY INTEREST:

Interested activities:

D.C. GOV'T.
GSA - FSS
INT
JUS
VA

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

GGG-S-51D FEDERAL SPECIFICATION SAW, CIRCULAR, PORTABLE, ELECTRIC

ORGANIZATION (Of submitter)	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD FORM 1 APR 63 1426 (NAVSHIPS OVPRT 13-66) REPLACES NAVSHIPS FORM 4883, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.