GGG-S-51E
June 14, 1995
SUPERSEDING
GGG-S-51D
November 12, 1969

FEDERAL SPECIFICATION

SAW, CIRCULAR, PORTABLE, ELECTRIC

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers portable electric circular saws.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types. The portable electric saws shall be of the following types, as specified (see 6.2):

Type I	-	Motor armature axis parallel to the saw-blade-spindle axis
Type II	-	Motors armature axis at right angles to saw-blade-spindle axis

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40	-	Packaging and Packing of Hand Tools; Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery

Federal Standards:

FED-STD-H28	-	Screw-Threads Standards for Federal Services
FED-STD-123	-	Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

DISTRIBUTION STATEMENT A Approved for public distribution; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specifications:

MIL-V-173 - Varnish, Moisture and Fungus Resistant (For Treatment of Communications, Electronics, and Associated Equipment

Military Standards:

MIL-STD-129 - Marking for Shipping and Storage
MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for Control of Electromagnetic Interference

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standard Institute (ANSI)/Anti-Friction Bearing Manufacturers Association (AFBMA):

ANSI/AFBMA B1 - Terminology or Nomenclature for Various Types of Bearings and Parts Definitions and Illustrations

ANSI/AFBMA B10 - Balls: Terminology, Definitions and Tolerances for Metal Balls

ANSI/AFBMA B18.2 - Needle Roller Bearings, Radial, Inch Design Identification Code, Boundary Dimensions, Tolerances, Fitting and Mounting Practices

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

American National Standards Institute (ANSI)/American Society of Quality Control (ASQC):

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.)

Underwriters' Laboratories, Inc. (UL)

UL 45 - Portable Electric Tools

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3 REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of portable electric saws otherwise conforming to this specification.

3.2 First article inspection. When specified (see 6.2), the contractor shall furnish a completely fabricated portable electric saw for first article inspection in accordance with section 4. The sample shall be a preproduction item or a production item which meets the requirements of this specification. In either case, the sample shall be identical with the proposed items and shall be made or shall have been made by the methods that are to be used in production of items to fulfill the terms of the contract. Approval of the first article shall not relieve the contractor of the responsibility to furnish equipment in accordance with the requirements of this specification.

3.3 Material. All materials used in the fabrication of the circular saw shall be new and of the quality necessary to produce a circular saw to meet the requirements described herein.

3.4 Design. The circular saw and its accessories shall be of the manufacturer's current design. The design shall be such as to provide convenient and safe operation. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment or repair.

3.4.1 Conformance to Underwriters' Laboratories (UL), Inc. standards. The saw shall comply with the requirements of the specified Underwriters' Laboratories (UL) standards. The contractor shall submit proof to the procuring activity that the saw complies to the requirements of the applicable UL standards. Compliance shall be indicated by the permanent attachment of an appropriate label, seal, or stamp that contains the UL listing mark to the product, or by a certificate furnished therewith. In lieu of the aforementioned, the contractor shall submit independent proof, satisfactory to the Government, that the saw complies to the requirements of the applicable UL standards including the UL method of test. Contractors compliance with the UL requirements does not absolve the contractor from complete compliance with the requirements of this specification. In the event of difference between any of the requirements of this specification and those of UL, the requirements of this specification shall govern. When electromagnetic interference (EMI) suppression is required, only the basic saw, prior to modification for EMI suppression, shall comply to the requirements of the applicable UL standard.

3.4.2 Lubrication. Bearings, gears, and moving parts shall be assembled with lubricating medium. If lubricant replensishment is required, external lubricant fittings or other suitable means shall be provided. Sealed-for-life bearings and permanently lubricated gear boxes shall not be required to have external fittings. The gears shall operate in a lubricant which shall be prevented from excessive leakge from the gear casing or entering the motor enclosure. Parts requiring protection from dust shall be enclosed.

3.4.3 Interchangeability. All parts from the same manufacturer shall be manufactured to such standards that will permit replacement or adjustment without modification of parts or machine.

3.5 Construction. The circular saw shall be free from any characteristics or defects which will prevent the circular saw from passing the examinations or tests specified in section 4. The circular saw shall be complete so that when connected to the specified source of power, it can be used for any operation for which it was designed.

3.5.1 Castings. All castings shall be free from defects or mismatching. In no event shall such process as welding, peeling, plugging, or filling with cold solders of metallic pastes be used on castings for reclaiming any parts of the saw.

3.5.2 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with a means of preventing loss of tightness. All such parts, when subject to removal or adjustment, shall not be swaged, peened, staked, or permanently deformed. Threaded parts shall be in the inch system and conform to FED-STD-H28. Self-tapping screws may be used in double-insulated tools.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

3.5.3 Surfaces. The surfaces of all castings, forgings, and molded parts shall be cleaned and free of sand, dirt, fins, spurs, scale, flux, or other harmful or extraneous materials. The external surfaces shall be smooth and all edges shall be rounded or beveled. The surfaces shall be finished according to the manufacturer's standard practice.

3.5.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where those operations are included in the fabrication of the original design. These operations shall not be employed as repair measures for defective parts.

3.5.5 Gears and shafts. The gears shall be made of alloy steel. Where worm gearing is used, the gearing may consist of a steel worm and bronze worm wheel. All gears shall have machine cut or roll formed teeth and be designed and supported to efficiently transmit imposed loads. The shafts shall be of alloy steel supported by at least two bearings to prevent deflection. All gears and shafts shall be fully enclosed.

3.5.6 Bearings. All rotating parts of the saws shall be provided with precision quality, commercially available ball and roller bearings conforming to ANSI/AFBMA B1, B10, and B18.2. Integral or separate shielding to prevent leakage of lubricant and entrance of contaminants shall be provided where necessary. Steel inserts may be omitted in mounting of bearings when sufficient contact area and suitable fit between bearing outer-diameter and housing is provided.

3.6 Component parts. Saws furnished under this specification shall consist of housing, handles, motor, electrical equipment, and base.

3.6.1 Housings. The housings shall be of a material of suitable characteristics to withstand stresses imposed by normal usage. All housings shall include the motor case, reduction gear mechanism, and blade guards.

3.6.1.1 Handles. The handles shall be pistol or closed grip so designed and positioned to provide a comfortable grip and facilitate ease of operation. The handles shall conveniently house a trigger switch in a protected position.

3.6.1.2 Auxiliary handle. An auxiliary handle or knob shall be provided to facilitate two-handed operation of sizes 10- and 12-inch saws.

3.6.2 Electrical equipment. All electrical components including motors, switches, and wiring shall conform to applicable requirements of UL 45 in addition to the requirements specified for the following components.

3.6.2.1 Motor. The motor shall be of the universal type designed to operate on either 120 volt (± 10 percent) direct current (DC), or 120 volt (± 6 percent), single-phase, 25 - 60 cycle alternating current (AC). The motor shall be mounted integral with the tool. The motor armature shall be balanced dynamically to insure freedom from destructive vibration.

3.6.2.2 Commutator. The commutator segments shall be of hard drawn, hard rolled, or drop forged copper. The commutator shall have sheet mica separators between segments or shall be of the molded mica construction using material that will be immune to deformation and dielectric degradation when subjected to maximum rotational forces operating temperatures encountered in service.

3.6.2.3 Switch. A two-pole, single-throw, instant-release trigger switch shall be provided and mounted in the saw handle. The switch shall be provided with a guard to prevent accidental actuation. The switch shall not be equipped with a mechanism for locking in the "ON" position. Mechanism for locking in the "OFF" position are acceptable.

3.6.2.4 Wiring. All wiring, flexible cord, attachment plug cap, and grounding means shall be in accordance with the requirements of UL 45. The cord shall have an attachment plug cap and, unless otherwise specified (see 6.2), a minimum free length of 8 feet measured from point of entry into the saw.

3.6.2.5 Electric brake. When specified (see 6.2), the saw shall be provided with an electric brake feature to reduce coasting and stop blade in a maximum of two (2) seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.6.3 Base. The saws shall be provided with a metal base designed to support the saw against material being cut and shall be provided with adjustments for cutting depth and angle of cut. The base design shall include a means for mounting a rip fence on either side.

3.6.3.1 Rip fence. When specified (see 6.2), each saw shall be furnished with an adjustable rip fence to fit the base.

3.6.3.1.1 Position indicator. Provisions shall be made on the saw base to clearly indicate the point of saw blade contact with work at a zero-angle adjustment.

3.6.3.1.2 Angle adjustment. Provision shall be made for the adjustment of the base from a 0° to 45° angle. A graduated angle scale shall clearly indicate the angle in increments of not more than 5° from 0° through 45°. Provisions shall be made for making the angle adjustment without use of tools except for the 12 inch saw which may be equipped with a clamping device that is activated and clamped by mechanical means other than a hand knob if the wrench provided for clamping can be attached to the tool for semi-permanent storage.

3.6.3.1.3 Depth adjustment. The base shall be readily adjustable to control the depth of cut within the cutting capacity specified herein for the type and size specified (see 6.2). The base adjustment shall be accomplished without the use of special tools.

3.6.4 Dust blower. The saw shall be provided with a dust blower having sufficient air output for clearing sawdust from the line of cut and away from the operator.

3.6.5 Spindle arbor. The type I saw shall be provided with a round saw-blade arbor conforming to the specified requirements in Table I. The type II saw shall be provided with a round saw-blade arbor conforming to the specified requirements in Table II, or diamond saw-blade arbor at the option of the manufacturer. The saw arbor shall be provided with a means for fastening the blade to arbor so as to transmit full motor spindle output and shall be of such a design that the spindle nut will not become loose in operation or excessively tight should the blade be stalled in operation. The saw shall be provided with a means to lock the blade for fast and easy blade changing.

3.6.6 Saw blades. Unless otherwise specified (see 6.2), each saw shall be furnished with a carbide-tipped combination saw blade having 20 to 28 teeth.

3.6.7 Rotation. Saw blade rotation shall be such that the material being cut will be held against saw base by the cutting action of the blade. The direction of the blade rotation shall be permanently and clearly indicated by an arrow of the saw-blade guard or housing when viewed from the spindle end.

3.7 Type I saw. The type I saws shall be of the heavy duty type, similar to Figure 1, with the motor armature axis parallel with saw-blade-single axis.

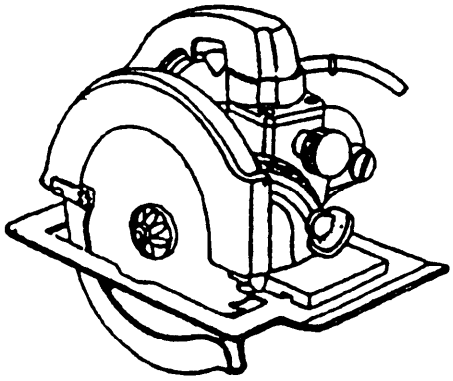


Figure 1. Type I portable, electric, circular saw, motor axis parallel to saw-blade-spindle axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.7.1 Sizes and capacities. The type I saws shall conform to the requirements of Table I for the size specified (see 6.2).

Table I. Type I saw requirements

Size (inches)	Blade diameter (inches)	No-load blade speed minimum (rpm)	Cutting capacity			Power output at spindle minimum (hp)	Rated current minimum (amps)	Blade arbor hole diameter (inch)	Weight (excluding cord 1/) maximum (pounds)
			90° at least (inches)	45° at least (inches)	Minimum cutting range (inches)				
6	6-1/2 to 6-3/4	5500	2	1-1/4	0 to 1/2	1/2	10	5/8	15
7	7 to 7-1/4	5200	2-3/8	1-3/4	0 to 3/4	1/2	13	5/8	18
8	8 to 8-1/4	5000	2-5/8	1-7/8	0 to 1	3/4	13	5/8	18
10	10 to 10-1/4	3800	3-3/8	2-1/4	0 to 1-1/4	1-1/8	15	5/8	35
12	12	3800	4-1/4	3	0 to 2	1-1/2	15	3/4	37

1/ UL approved power cord

3.8 Type II saw. The type II portable electric saws shall be heavy duty, similar to Figure 2, with the motor armature axis at right angles to the blade-single axis.

3.8.1 Size and capacities. The type II saws shall conform to the requirements of Table II for the size specified (see 6.2).

3.8.2 Components. The type II saw components shall be similar to and comply with the requirements specified herein, except handles shall be closed grip with an auxiliary handle or knob provided for two-handed operation.

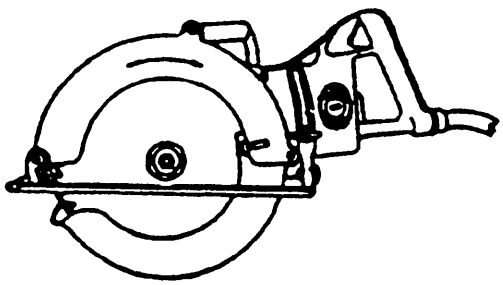


Figure 2. Type II portable, electric, circular saw, motor axis at right angles to saw-blade-spindle axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Table II. Type II saw requirements

Size (inches)	Blade diameter (inches)	No-load blade speed minimum (rpm)	Cutting capacity			Power output at spindle minimum (hp)	Rated current minimum (amps)	Blade arbor hole diameter (inch)	Weight (excluding cord 1/) maximum (pounds)
			90° at least (inches)	45° at least (inches)	Minimum cutting range (inches)				
6	6-1/2 to 6-3/4	4500	2	1-1/4	0 to 1/2	3/4	8	5/8	15
7	7-1/4 to 7-1/2	4200	2-3/8	1-3/4	0 to 3/4	3/4	9	5/8	18
8	8 to 8-1/4	4200	2-5/8	1-7/8	0 to 1	3/4	9	5/8	18
10	9-7/8 to 10-1/4	2900	3-3/8	2-1/4	0 to 1-1/4	1-1/8	12	3/4	35
12	11-7/8 to 12	2500	4-1/4	3	0 to 2-3/8	1-1/2	15	3/4	37

1/ UL approved power cord

3.9 Accessory equipment. All saws shall be supplied with such maintenance tools, accessories, and extra parts as normally furnished commercially. One arbor nut wrench shall be included with each saw.

3.10 Carrying case. Each saw shall be furnished with a durable carrying case of sufficient size to contain the circular saw, maintenance tools, and accessories. The case shall be complete with hinged cover, carrying handle, and closing fastener. The interior and exterior surfaces of the carrying case shall have a durable coating of paint or enamel, except surfaces which are inherently corrosion free or electroplated. The case shall be marked with the manufacturer's name or identification symbol.

3.11 Identification plate. Each saw shall bear an identification plate in accordance with the applicable requirements of UL 45.

3.12 Weight. The weight of the saw complete, including UL approved power cord, shall not exceed the requirements specified in Tables I and II for the size specified (see 6.2).

3.13 Electromagnetic interference suppression. When specified (see 6.2), each saw shall be electromagnetic interference free within the limits specified for portable electric tools in compliance with the requirements of MIL-STD-461.

3.14 Fungus proofing. When specified (see 6.2), the electrical circuitry, including all components and connections, shall be protected from the effect of water and fungus growth by an overall treatment with a varnish conforming to MIL-V-173 with the following exceptions:

(a) Components or circuit elements which are inherently fungus and water resistant or which are hermetically sealed need not be treated.

(b) Components or circuit elements whose function will be adversely affected by the varnish coating shall not be treated. When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry film thickness of 0.001 inch to the component or element surface previously cleaned and prepared in accordance with commercial practice.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

3.15 Handbook of instructions. Unless otherwise specified (see 6.2), each saw shall be furnished with an instruction manual in accordance with the applicable requirements of UL 45.

3.16 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for change to this document.

3.17 Workmanship: Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth, dry, adherent, continuous, and not stained or discolored. All fasteners shall be firmly secured and show no evidence of deformation, cross threading, or hazardous burrs. Adhesives and lubricants adequate for their intended purpose shall be properly and neatly applied. Adhesives shall be adequately cured. Wires and cables shall be neatly dressed and adequately cured. Wire and cable insulation shall show no evidence of burns, abrading, or pinch marks. There shall be no interference, binding, or galling of parts. External and bearing surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be clean and free of corrosion and debris (e.g., chips, shavings, slivers) or other foreign material. The item shall be free from manufacturing workmanship defects (e.g., loose, missing, binding or misaligned parts, sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specification and standards to the extent specified, or, if none, in accordance with this specification.

4.2 First article inspection. First article inspection shall be applied to the first article submitted in accordance with 3.2. Failure of the first article to pass the examination on one or more preproduction tests shall be cause for rejection. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.4.1 and all tests in 4.5.

4.3 Sampling for quality conformance inspection.

4.3.1 Lot. All saws of the same type and size offered for delivery at one time shall be considered a lot for purposes of quality conformance inspection.

4.3.2 Sample. A random sample shall be selected from each lot in conformance with ANSI/ASQC Z1.4 at inspection level I.

4.4 Quality conformance inspection. Quality conformance inspection shall be performed on each sample saw selected in accordance with 4.3.2. Quality conformance inspection shall consist of the following:

(a) Examination (see 4.4.1).
(b) Tests (see 4.5.1 through 4.5.3).
(c) Inspection of preparation for delivery requirements (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.1 Examination. Each saw selected in accordance with 4.3.2 shall be examined to determine compliance with the requirements of this specification. Examination shall be conducted in accordance with Table III. Acceptable quality level (AQL) to be as indicated. Nonconforming saws shall not be offered for delivery and if the nonconforming saws in any one sample exceed the acceptance number for that sample, the lot represented shall be rejected.

Table III. Classification of defects

Examine	Defect	Classification Critical	Major	Minor
Construction and workmanship	Not safe from electric shock or fire hazard	001		
	Moving parts improperly guarded	002		
	No kick-back device	003		
	Saws not of type or size specified		101	
	Component parts missing, damaged, defective, or not as specified		102	
	Cable assembly not as specified		103	
	Wiring not as specified		104	
	Gears, shafts, and bearings not as specified		105	
	Base adjustment not as specified		106	
	Evidence of lubricant leakage		107	
	Rip fence not graduated as specified		108	
	Position indicator not as specified		109	
	Angle adjustment not as specified or requires tools. Depth adjustment not as specified or requires tools		110	
	Dust blower not provided		111	
	Spindle arbor not of diameter specified or spindle nut becomes loose or tightens in operation		112	
	Blades not of type specified		113	
	Blade rotation not indicated as specified		114	
	Evidence of poor workmanship		115	
	Identification plate not as specified			201
	Handbook or parts list missing or not the type specified			202
	Carrying case not as specified			203

4.4.2 Tests for quality conformance. Each sample selected in accordance with 4.3.2 shall be tested for compliance with the requirements of this specification. The AQL shall be 0.65 percent defective. Nonconforming drills shall not be offered for delivery and if the number of defective units exceeds the acceptable number for the sample tested, the lot represented shall be rejected. Quality conformance tests shall consist of the tests specified in 4.5.1 through 4.5.3.

4.5 Tests.

4.5.1 Electromagnetic interference test certification. If an EMI suppression network is required, the contractor shall provide certification that the suppression network in the saws offered conform to the requirements of 3.13 or are identical to that of saws previously tested and approved.

4.5.2 UL 45 tests certification. The offerer shall provide certification that the saw offered conforms to the test requirements of UL 45 (see 3.4.1 for compliance to this requirement).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.5.3 Speed, amperage, and other tests. The sample saws shall be tested to verify that the saws comply with the requirements specified below and as listed on the nameplate. Variation in values shall not be more than percentages allowed by UL 45. Nonconforming saws shall be rejected:

(a) Blade no-load speed.
(b) Rated current at nameplate voltage.
(c) Temperature rise (per UL 45 test procedures).

4.6 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with Table IV. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Table IV. Classification of preparation for delivery defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling Distortion of container
Contents	Number per container is more or less than required Net weight exceeds requirements

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Preservation, packaging, and packing shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or Commercial as specified (see 6.2).

5.2 Marking.

5.2.1 Civil agencies. In addition to any special marking specified in the contract or order, each unit package and shipping container shall be marked in accordance with FED-STD-123.

5.2.2 Military agencies. Interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

6 NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Portable, electric saws as furnished under this specification are hand-guided saws intended primarily for cross-cutting and rip-sawing wood products at angles from 0° to 45°. By use of special saw blades, ferrous and nonferrous metals, masonry, and ceramic materials may also be cut.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type of item required (see 1.2).
c. Type of saw blade required (see 3.6.6).
d. First article approval, if required (see 33.2 and 4.2).
e. Length of cord, if different (see 3.6.2.4).
f. When electric brake feature is required (see 3.6.2.5).
g. When rip fence is required (see 3.6.3.1).
h. Instruction book requirements, if different (see 3.15).
i. When electromagnetic interference suppression is required (see 3.13).
j. When fungus proofing is required (see 3.14).
k Level of preservation, packaging, and packing required (see 5.1).
l. Marking, if other than specified.

MILITARY INTERESTS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL
Navy - SH
DSAH - GS

User Activities:

Army - CE, EL
Navy - MC, YD

MILITARY COORDINATING ACTIVITY:

Army - GL

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:36Z
Check the source to verify that this is the currentversion before use.