INCH-POUND

GGG-S-58F
12 August 1993
SUPERSEDING
GGG-S-58E
May 25, 1983

FEDERAL SPECIFICATION

SAW, RADIAL OVERARM, WOODWORKING

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers radial overarm, electric motor driven circular, woodworking saws.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification. The saws shall be of the following styles, and sizes, as specified (see 6.2):

Style A -	With legs.
Style B -	Without legs (for portable use).
Size 10 -	Standard duty (5/8-inch arbor), 2-3/4 inch depth of cut, 10-inch max. blade diameter.
Size 12 -	Standard duty (5/8-inch arbor), 3-3/4 inch depth of cut, 12-inch max. blade diameter.
Size 14 -	Heavy duty (1-inch arbor), 4-inch depth of cut, 14-inch max. blade diameter.
Size 16 -	Heavy duty (1-inch arbor), 4-1/2 inch depth of cut, 16-inch max. blade diameter.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: SATBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Size 18 - Heavy duty (1-inch arbor), 4-7/8 inch depth of cut, 18-inch max. blade diameter.
Size 18L - Heavy duty (1-inch arbor), 4-7/8 inch depth of cut (extra long overarm), 18-inch max. blade diameter.

2. APPLICABLE DOCUMENTS

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Federal Specification

GGG-B-440 - Blade, Circular Saw, Woodcutting.

Federal Standards

FED-STD-123 - Marking for Shipment (Civil Agencies).
FED-STD-H28 - Screw Thread Standards for Federal Services.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions, as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification, other Federal specifications, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards, and Commercial Item Description from established distribution points in their agencies.)

Military Specifications

MIL-P-514 - Plates, Identification, Instruction and Marking, Blank.
MIL-M-18058 - Machinery, Metal and Woodworking, Preparation for Delivery of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Military Standards

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-889	-	Dissimilar Metals.
MIL-STD-1472	-	Human Engineering Design Criteria for Military Systems, Equipment, and Facilities.
MS35792	-	Handle, Bail-Chest, Recessed.

(Unless otherwise indicated, copies of federal and military specifications, and standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF LABOR (DOL)

Occupational Safety and Health Act of 1970 (OSHA)
Title 29, Code of Federal Regulations, Chapter XVII, Part 1910, and Amendments.
Title 29, CFR 1920.145.
Occupational Safety and Health Administration Standards.

(Application for copies should be addressed to the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM):

D 3951 - Standard Practices for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA):

MG 1 - Motors and Generators.
ICS 1 - Industrial Controls and Systems, General Standards For.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 155 East 44th Street, New York, NY 10017.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA):

No. 70 - National Electrical Code

(Application for copies should be addressed to the National Fire Protection Association, 60 Batterymarch Street, Boston, MA 02110.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The saws shall consist of the following: (1) A non-tilting, horizontal frame with worktable; (2) an upright column supporting a horizontal nonretractable overarm attached to or supported by the frame and extending above the table top, with the arm having integral machine tracks for traverse of the cutting head; and (3) a yoke supporting a cutting head consisting of a revolving nonportable electrical motor with saw blade.

3.1.1 Performance. The saws shall be capable of performing straight line cuts of the sizes specified in table I. The cuts performed shall be accurate within the following limits:

Straightness - 0.008 inch per foot.
Squareness - 0.008 inch per foot.
45° mitering - 0.010 inch per foot.
45° beveling - 0.010 inch per foot.

3.1.2 Size. Each saw size shall be capable of using the maximum diameter of saw blade specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

3.2 First article. Unless otherwise specified (see 6.2), a sample(s) shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Material. Material shall be as specified herein. Material not specified shall be new and of a quality necessary to produce saws to meet the requirements specified herein. Materials used shall be corrosion resistant or provided with a coating that provides protection against the various forms of material deterioration in the applicable operating and storage environments to which they may be exposed.

3.3.1 Material deterioration prevention and control. The saw shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the saw may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the saw may be newly fabricated from recovered materials to the maximum extent practicable, provided the saw produced meets all other requirements

3.4 Safety. All exposed parts which are energized electrically shall be insulated, fully enclosed or guarded. All moving parts which are hazardous to the operator shall be guarded in accordance with OSHA requirements, Subpart O, 1910.212 and 1910.213. Protective devices shall not impair the operating functions. All hand-operated devices such as adjusting levers, latches, locks, handwheels, and cranks shall be located away from the cutting tool. When specified (see 6.2), additional safety and health requirements shall be provided.

3.5 Ease of maintenance. All major assemblies, installed attachments, and parts subject to wear shall be accessible for adjustment, repair, and replacement. Bolts, nuts, screws, and similar items shall be held to a minimum number of types and sizes and shall be installed with means to prevent loss of tightness without

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

swaging, peening, or staking. All new screw threads shall be threaded to the standards of FED-STD-H28. All maintenance, assembly, or disassembly shall use tools and test equipment already in the Army inventory.

3.6 Frame. The frame shall support the saw and have the radial overarm assembly attached. The frame shall be a metal structure, braced so that the saw may be operated at maximum output without visible vibration or deflection of the overarm.

3.7 Worktop table assembly. The worktop table assembly shall consist of the worktop table and front guide fence and may be equipped with a rear guide fence.

3.7.1 Worktop table. The worktop table shall be a nontilting surface. The worktop table for size 10 and 12 saws shall consist of 3/4 inch minimum thickness resin bonded plywood with hardboard surfaces, particle board or medium density fiberboard (44-46 lbs/cu.ft.). The worktop table for size 14, 16, 18, and 18L saws shall consist of 1 inch minimum thickness resin bonded plywood with hardboard surfaces, particle board, edge grained fir, vertical grained fir, or medium density fiberboard (44-46 lbs/cu.ft.). The worktop table shall be of sufficient depth to give support to lumber of sizes as specified in table I. When specified (see 6.2), the worktop table, with permanent or removable extensions, shall be of a size that when the saw is at the limit of saw travel toward the operator, when crosscutting or when positioned for full capacity normal ripping, no part of the saw teeth or cutting edge will project beyond the front edge or ends of the worktop table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE I. Saw capacities

Saw Size	Req'd Arbor Dia.	Min. Dia. of Saw Blade	Depth of Cut with Lower Guard 1/	Crosscut Capacity Width 2/	Ripping Capacity Width 3/	Miter Capacity Width 4/	Dado head width with guard	Motor Selection 5/			
								50 Hertz		60 Hertz	
								Single Phase	Three Phase	Single Phase	Three Phase
	inch	inches	inches	inches	inches	inches	inches	HP	HP	HP	HP
10	5/8	10	2-3/4	12-1/2	24	9	13/16	1	1-1/2	1	1-1/2
12	5/8	12	3-3/4	14-1/4	24	9-1/2	13/16	1-1/2	2	1-1/2	2
14	1	14	4	24	36	17	2	3	5	3	5
16	1	16	4-1/2	24	36	17	2	3	5	3	5
18	1	18	4-7/8	28	41	19-1/2	2	5	7-1/2	5	7-1/2
18L	1	18	4-7/8	32	48	21-1/2	2	5	7-1/2	5	7-1/2

1/ From 0" to at least depth shown.
2/ With 1" actual thickness of lumber, against guide, 0" to at least width shown.
3/ Width between guide and saw blade, 0" to at least width shown.
4/ With 1" dressed lumber at 45 degrees, 0" to at least width shown.
5/ Motor phase, frequency, and voltage shall conform to current characteristics specified (see 3.11.1). Horsepower shown are minimum continuous duty ratings. In addition, motors shall be capable of meeting maximum developed horsepower ratings shown in table IV.

X-4083A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.7.2 Front guide fence. The front guide fence shall be dressed white pine or other soft short grain wood or particle board of not less than 3/4 inch thickness. The fence shall extend not less than 3/4 inch above and to both ends of the tabletop. The fence shall be removable. A single guide fence may be furnished to serve as both front and rear guide fence (see 3.7.3).

3.7.3 Rear guide fence. A rear guide fence, if required for maximum ripping capacity, may be fastened to the rear of the worktop table or may be removable. The fence shall be of dressed white pine or other soft, short grain wood or particle board of not less than 3/4 inch thickness. The fence shall extend not less than 3/4 inch above and to both ends of the tabletop.

3.8 Radial overarm assembly. The radial overarm assembly shall consist of an upright column supporting a horizontal arm. The radial overarm assembly shall be adjustable for mitering at least 45 degree on one side of the normal crosscutting position and at least 60 degree on the opposite side of the normal crosscutting position as shown in figure 1. The cutting head, with mountings and motor, shall be assembled to the radial overarm assembly. The cutting head shall move freely on precision ball or roller bearings, rolling on fully machined tracks or hardened rods. The radial overarm assembly shall be equipped with bearings, stops, miter locator, miter lock, miter scale, rip lock, and rip scale in accordance with the following requirements. All scales and pointers shall be adjustable to provide calibration.

3.8.1 Bearings. Bearings for the radial overarm assembly shall be of the precision ball or roller radial type, prelubricated, and sealed or shielded for life. Bearings shall withstand without damage all radial loads and thrust loads produced when the saws are operating as specified herein.

3.8.2 Stops. The radial overarm assembly shall be equipped with stops at the travel limits of the cutting head. The limiting stop shall be cushioned to prevent damage to the saw. The rear stop shall prevent the blade or accessories from contacting the base or column during any operation shown in figure 2. The radial overarm assembly shall be prevented from leaving the arm in the event of failure of a limiting stop or arm end cap, when the push button switch is an integral part of the end cap.

3.8.3 Miter locator. The radial overarm assembly locator shall locate and maintain the accuracy of the saw when performing mitering operations at the 45 degree positions.

3.8.4 Miter lock. A positive holding, quick acting, miter lock shall lock the radial overarm assembly anywhere within the mitering range of the saw.

3.8.5 Miter scale. The radial overarm assembly shall be equipped with a miter scale or calibrated dial. The scale shall be calibrated in increments of not less than 1 degree for the complete mitering range of the saw. Starting from zero at least every 15th degree shall be numbered and every 5th degree shall be indicated by a longer division line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.8.6 Rip lock. A positive holding, quick operating rip lock shall lock the radial overarm assembly anywhere within the ripping range of the saw. The rip lock shall not distort any part of the saw it contacts.

3.8.7 Rip scale. The radial overarm assembly shall be equipped with one or more rip scales to indicate the width of rip. The scales shall be lithographed, etched, or engraved and shall be graduated at 1/16 inch intervals. The 1-inch calibrations shall be numbered.

3.8.8 Rotation direction. The guard or motor assembly shall be permanently marked to show the correct arbor rotation direction. All arbor mounted accessories shall be permanently marked with the correct rotation direction on the side installed away from the motor.

3.9 Cutting head with yoke and motor. The cutting head shall consist of the saw guard and antikickback device, arbor mountings, and the motor. The cutting head shall be mounted in a yoke for traveling on or with the radial overarm assembly. The cutting head, in combination with the radial overarm assembly, shall permit the positioning of the cutting tools to perform any of the operations specified herein. When tested as specified in 4.5.2.2, the total cutting head deflection shall not exceed that specified in table II and the dial indicator shall return to within 0.001 inch of zero in each case.

TABLE II. Cutting head deflection.

Saw size	Load, pounds	Total deflection, inch maximum
10	2	0.010
12	3	0.020
14	7-1/2	0.012
16	10	0.010
18	15	0.010
18L	15	0.015

The cutting head shall have a horizontal radial range of travel of not less than 180 degree when measured from a normal left-hand crosscutting position (see figure 1) to either inside or outside the ripping position.

3.9.1 Bevel locator. The saw shall be equipped with a bevel locator consisting of a positive locating, quick acting device or devices with means of adjustment for locating the cutting head in not less than three positions. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

normal horizontal crosscutting position, the 45 degree beveling position, and the normal vertical position.

3.9.2 Bevel lock. The saw shall be equipped with a positive-holding, quick-operating bevel lock for locking the cutting head anywhere within the beveling range of the saw.

3.9.3 Bevel scale. The saw shall be equipped with a bevel scale or calibrated dial. The scale shall be calibrated in increments not greater than 1 degree for the complete beveling range of the machine. Starting from zero, every 5th degree calibration shall be longer than the intermediate calibrations.

3.9.4 Cutting head locator. The cutting head shall be equipped with a locator consisting of a positive locating, quick acting device or devices with means of adjustment for locating the cutting head in at least three positions: The normal crosscutting position, the inside rip position, and outside rip position. A clamp shall be provided to insure tightness under vibration.

3.9.5 Adjustments. Adjusting mechanisms shall be provided at each point where it is necessary to change the position of the saw to perform any operation shown in figure 2. The adjustments shall be made without the use of shims. The adjusting mechanisms shall maintain their setting during full load operation and shall remain accurate until the adjustment is reset. All frequently used adjusting mechanisms shall be provided with a means to facilitate quick and accurate settings. Positive-adjusting mechanisms shall be provided at all necessary points to permit the saw to be adjusted for accurate cuts initially and to compensate for wear which might later affect the accuracy of the saw. Saw adjustment mechanisms shall include the following means for adjustment:

a. Either tabletop to be parallel to line of saw travel or line of saw travel to be parallel to tabletop for all types of cutting operations.
b. Sawing head to make the saw blade perpendicular to tabletop.
c. Line of saw travel to be perpendicular to guide fence.
d. Extreme rear position of the cutting head by means of a stop to prevent the saw blade, cutting head, or guard from striking the upright column when making any cut shown in figure 2.
e. Bevel, miter, and rip scale so that their readings will be coincident with stops or saw kerf.
f. Ways or rollers to eliminate cutting head play.
g. Motor orientation so that the trailing edge of the blade follows the leading edge through the cut kerf (heel adjustment).

The saw shall have a vertical adjustment to provide an unobstructed clear distance between the bottom of the motor and the worktable in accordance with table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE III. Vertical adjustment.

Saw size	Vertical clear distance (motor bottom to table), inches minimum
10	6
12	9-1/2
14	13
16	14-1/2
18	14-1/2
18L	14-1/2

The vertical adjustment shall be accomplished by a protected screw mechanism. One revolution of the crank or handwheel shall raise or lower the cutting head 1/16 or 1/8 inch. The crank, handwheel, or adjacent area shall be marked to show elevation rotation direction. The screw shall turn without undue force but the construction shall be such that the accuracy of setting will be maintained during at least 1/2 hour of actual continuous crosscut operations using the maximum depth and width of cut specified in table I. Mechanical means shall be provided for adjusting and maintaining the accuracy of alinement of each saw for every usable position.

3.9.6 Saw guard, antikickback device, and splitter. Each saw shall be equipped with an adjustable saw guard which shall protect the operator under all operating conditions specified herein. The upper part of the saw guard shall cover not less than one-half of the sawblade periphery down to a point that will include the end of the saw arbor. The saw guard shall be equipped with a reversible dust spout to throw the dust away from the operator during all sawing operations. The lower part of the saw guard shall be either: (1) A type that completely covers the lower periphery of the saw blade on both sides and raises as the blade enters the cut and drops back into position upon completion of the operation; or (2) a clamp type guard that shall clamp to the upper guard and shall be fully adjustable to cover all portions of the cutting tool above the material being cut. The lower saw guard shall operate freely and smoothly while performing any of the cuts shown in figure 2. An antikickback device shall be furnished to protect the operator during bevel and straight ripping operations and shall be adjustable to any thickness of stock within the capacity of the saw with which it is used. The saw shall be provided with a roll or knife type adjustable splitter to prevent material from pinching the blade.

3.9.7 Arbor. The motor shall have a round, solid arbor which is integral with the rotor. The arbor shall be of sufficient length to mount the maximum width

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

dado cutters as shown in table I. The diameter of the arbor at the saw blade mounting position shall be in accordance with table I. Eccentricity of the arbor and flange at the saw blade mounting position shall not exceed 0.002 inch (total indicator reading) and 0.0025 inch (total indicator reading), respectively.

3.9.8 Mountings. Each cutting head shall be equipped with a motor mounting yoke. The yoke shall be constructed and balanced so as to maintain its setting accurately in any position while the saw is operating.

3.9.9 Automatic return device. The saw shall be equipped with an automatic return device that will return the cutting head to the retracted position when released by the operator. The device shall return and hold the cutting head in full retracted position when released from any position of its travel on the overarm.

3.10 Gears, worms, and worm wheels. Gears, worms, and worm wheels, if used, shall provide smooth transmission of power and speed within standard gear design practices.

3.11 Electrical equipment.

3.11.1 Motor types. The motor size, type, and voltage shall be selected from tables I and IV, as specified (see 6.2 and 6.7).

3.11.2 Motors. Motors shall be of the continuous duty induction type, shall be as specified in table IV, and shall conform to NEMA Standard MG1 except for frame size, mounting dimensions, and shaft and starting torque. Motors shall be the direct drive type equipped with precision ball or roller bearings of the radial thrust type sealed, shielded, and lubricated for life. The motor armature or rotor and shaft shall be balanced dynamically.

3.11.3 Motor protection and wiring. Motor protection and wiring shall be in accordance with NFPA Standard No. 70.

3.11.4 Starter. The saws shall be equipped with a pushbutton starter of the type specified in table IV. Unless otherwise specified herein, the starter shall be mounted in a NEMA Standard ICS 1, type I enclosure. When weatherproof construction is specified (see 6.2), the starters shall be installed in a location to provide weatherproof protection; or shall be mounted in a NEMA Standard ICS 1 type IV enclosure, at the option of the contractor. The stop-start pushbutton shall be located within sight and easy reach of the operator in any operating position of the saw. A wiring diagram shall be secured to the inside of the removable starter cover. The stop-start pushbutton and the removable starter cover shall be labeled "START-STOP" in minimum 0.25-inch high letters.

3.11.5 Cord. Leads between the motor and switch shall conform to NFPA Standard No. 70, type SJ, SO, SJT, S, or ST "Hard Service" Cord.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

3.11.6 Power brake. A power brake as specified in table IV shall be incorporated in the motor control circuit. With the saw operating at full no-load-speeds, the power brake shall automatically stop the saw blade motor within the applicable braking time range specified in table V. The brake shall decelerate the saw blade smoothly to a stop and stop the saw blade motor within the time range specified in table V without overheating or without loosening of the saw blade nut. After the power brake is operated, the motor shall restart without resetting or adjusting the brake.

3.12 Additional equipment. All additional equipment shall be as specified herein and shall operate on the size of saw specified. Saw blades and cutters shall fit the arbor without the use of bushings. Saw blades except those used for dadoing shall be of a diameter capable of cutting the depths specified.

3.12.1 Equipment furnished with the saw. The following equipment shall be furnished with each saw:

1 each - combination saw blade.
1 each - set of tools normally furnished by the contractor (see 3.5).

3.12.2 Optional equipment. When specified (see 6.2), any or all of the following equipment shall be furnished with each saw:

Set of dadoing equipment.
Set of dado spacing collars.
Set of shaping cutters (size 10 and 12 only).
Blades, circular saw, woodcutting of sizes and types specified.
Set of roller conveyor tables with legs (size 14, 16, 18, and 18L only).

3.12.2.1 Dadoing equipment. Dadoing equipment shall consist of a dado head and a guard when the guard specified in 3.9.6 is not of sufficient width to cover the dado head. The dado head shall consist of two (outside) hollow-ground saw blades and a sufficient number of (inside) dadoing cutters to perform any dadoing cut from a minimum width of 1/8 inch and each width in the 1/16-inch increments up to and including the dado head width specified in table I. The minimum diameter of the dado head shall be in accordance with table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE IV. Motor and Motor Controls 1/

Saw Size	AC, 50 Hertz, 3000 RPM nom.		AC, 60 Hertz, 3450 RPM nom.		Control 2/(See 3.11.4)		Power Brake to Stop Motor (See 3.11.6)
	Single Phase	3 Phase (See 6.7)	Single Phase	3 Phase (See 6.7)	Single Phase	3 Phase	
10	1 HP continuous duty, 2 HP max. developed, 115/230 volts, capacitor start; totally enclosed and fan cooled, or guarded drip proof.	1-1/2 HP continuous duty, 3-3/4 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled, or guarded drip proof.	1 HP continuous duty, 2 HP max. developed, 115/230 volts, capacitor start; totally enclosed and fan cooled, or guarded drip proof.	1-1/2 HP continuous duty, 3-3/4 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled, or guarded drip proof.	Manual	Magnetic, with undervoltage protection	Automatic mechanical built-in motor brake or electric regenerative built-in motor brake.
12	1-1/2 HP continuous duty, 2-1/2 HP max. developed, 115/230 volts, capacitor start; totally enclosed and fan cooled, or guarded drip proof.	2 HP continuous duty, 5 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled, or guarded drip proof.	1-1/2 HP continuous duty, 3-1/2 HP max. developed, 115/230 volts, capacitor start; totally enclosed and fan cooled, or guarded drip proof.	2 HP continuous duty, 5 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled, or guarded drip proof.	Manual	Magnetic, with undervoltage protection	Automatic mechanical built-in motor brake or electric regenerative built-in motor brake.
14	3 HP continuous duty, 6.8 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	5 HP continuous duty, 13 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled.	3 HP continuous duty, 6.8 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	5 HP continuous duty, 13 HP max. developed, 200 or 230/460 or 575 volts; totally enclosed and fan cooled.	Magnetic, with undervoltage protection	Magnetic, with undervoltage protection	Electric regenerative or automatic electro-mechanical.
16	3 HP continuous duty, 6.8 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	5 HP continuous duty, 13 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled.	3 HP continuous duty, 6.8 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	5 HP continuous duty, 13 HP max. developed, 200 or 230/460 or 575 volts; totally enclosed and fan cooled.	Magnetic, with undervoltage protection	Magnetic, with undervoltage protection	Electric regenerative or automatic electro-mechanical.
18 18L	5 HP continuous duty, 9.5 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	7-1/2 HP continuous duty, 20 HP max. developed, 200 or 230/460 volts; totally enclosed and fan cooled.	5 HP continuous duty, 9.5 HP max. developed, 230 volts, capacitor start; totally enclosed and fan cooled.	7-1/2 HP continuous duty, 20 HP max. developed, 200 or 230/460 or 575 volts; totally enclosed and fan cool	Magnetic, with undervoltage protection	Magnetic, with undervoltage protection	Electric regenerative or automatic electro-mechanical.

1/ Motor horsepowers are minimum.
2/ Machines equipped with magnetic controls shall employ control circuits operating at a maximum of 125 volts measured earth to ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE V. Braking time range for power brakes.

Saw size	Braking time, seconds maximum
10	10
12	25
14	18
16	20
18	45
18L	45

TABLE VI. Dado heads.

Saw size	Dado Head	
	Minimum diameter (inches)	Minimum depth of cut (inches)
10	6	1
12	6	1
14	8	1-1/2
16	10	2
18	12	3
18L	12	3

3.12.2.1.1 Spacing collars. Spacing collars for dadoing equipment shall consist of one each of 1/16, 1/8, and 1/4 inch in thickness. The spacing collar hole shall correctly fit the arbors specified in table I and shall be of sufficient outside diameter to support the cutter heads.

3.12.2.2 Shaping cutters. The set of shaping cutters shall be of the head and inserted-blade type. Cutter shapes shall be as specified (see 6.2).

3.12.2.3 Blades. Blades shall conform to GGG-B-440.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

3.12.2.4 Roller conveyor tables. The set of roller conveyor tables shall consist of two tables 8 feet long plus or minus 1 inch, each having not less than five metal rollers not less than 12 inches long for size 14 saws and not less than 18 inches long on sizes 16, 18, and 18L and not less than 1.875 inches in diameter (see 3.18 for saws adapted for trailer mounting). The metal rollers shall be supported by and shall rotate on ball or roller bearings. The saw table and roller table shall be provided with means for securely fastening their inboard ends to the ends of the saw table at an adjustable height which will permit lumber placed on the conveyor table to just clear the saw table. The outboard ends of each conveyor table shall be supported by two legs braced and having individual, positive locking adjustments for height variations up to 6 inches. When attached to the saw table, the conveyor table with its legs shall support a 20 foot hardwood timber, 8 inches square, without perceptible vibration or side sway.

3.13 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.14 Fungus control. When specified (see 6.2), fungusproofing shall be in accordance with commercial practices for equipment going to the tropics.

3.15 Identification marking. Each saw shall be legibly and permanently marked with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined. The marking shall include the type or model designation and any other descriptive data necessary to identify spare or replacement parts.

3.16 Identification plate. When specified (see 6.2), each saw shall be provided with a separate identification plate conforming to MIL-P-514, type I, style 2, composition C of type I, grade A, class 1 material. The plate shall contain the following information marked with 3/16-inch high characters:

Production equipment code number (to be supplied in contract).
Activity identification (to be inscribed by the receiving activity).

3.17 Treatment and painting. Unless otherwise specified (see 6.2), the saws shall be treated and painted in accordance with the suppliers standard practice.

3.18 Military requirements. When size 16 saws, adapted for trailer mounting (style B), are specified (see 6.2 and 6.6), the requirements specified in 3.18.1 through 3.18.3 shall apply.

3.18.1 Dimensions and weight. The overall dimensions and weight of the size 16 saw, shall not exceed the following:

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the currentversion before use.

Width	50 inches
Depth	35 inches.
Height	45 inches
Width of roller conveyor table	12 inches
Length of roller conveyor table	5 feet
Weight	750 pounds

The width shall be measured from side to side. The depth shall be measured from the extreme rear of the table frame to the front of the table frame.

3.18.2 Saw modifications. The saw shall be modified to provide it with rollers to permit the saw to be rolled from the traveling position to the operating position and back without binding. The general configuration of the rollers shall be as shown in figures 3 and 4. Hold-downs shall be provided to prevent shifting of the saw while in transit on the trailer and while the saw is being operated on the tailgate. The general configuration of the hold-downs shall be as shown in figures 5 and 6. Two handles conforming to MS35792-1 shall be mounted in the front of the saw base 6 inches ± 1 inch from each corner for pulling the saw from the trailer onto the tailgate.

3.18.3 Elevating handle. The elevating handle shall be located on the overarm at or near the front at the overarm; or the handle must extend outward from the base at least 8 inches when being used. When attached to the base and not in use, the handle shall not interfere with operator's movement around saw nor interfere with the trailer. The handle shall be permanently attached to the saw.

3.19 Style A, with legs or cabinet. The style A saws shall be equipped with legs of steel or cast iron. The legs shall be constructed and braced to provide a rigid support for the saw. The worktable top surface for style A saws shall be no less than 36 inches and no more than 42 inches above the floor. When specified (see 6.2), a metal cabinet with door and latch shall be provided for style A, size 10 saws only.

3.20 Style B, without legs (for portable use). The style B saws shall be furnished without legs for bench and portable use.

3.21 Human factors engineering. The saw shall comply with the design criteria of MIL-STD-1472. Special design emphasis shall be given to MIL-STD-1472 paragraphs: general requirements (4), control/display integration (5.1), visual displays (5.2), controls (5.4), labeling (5.5), anthropometry (5.6), workspace design (5.7), design for maintainer (5.9), hazards and safety (5.13), as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.22 Noise labeling. A standard commercial noise caution sign or decal, conforming to 29 CFR 1920.145, stating that "HEARING PROTECTION IS REQUJIRED WHEN THE SAW IS OPERATING.", shall be permanently attached to the saw in a location clearly visible and legible to the operator and other personnel within the vicinity.

3.23 Workmanship. The saws shall be free from defects such as incomplete welds, rust, cracks, or other defects that could impair the operation or serviceability of the saws.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of preparation for delivery (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The saw(s) shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The saw(s) shall be tested as specified in 4.5.2.1 through 4.5.2.8, as applicable. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for tests shall be in accordance with MIL-STD-105, inspection level II. Sample lot size shall be determined by using MIL-STD-105, table I and IIa.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.2 Examination. Each saw shall be examined as specified in 4.4.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Test. Each saw selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.4 and 4.5.2.8. Failure of any test shall be cause for rejection of the lot.

4.5 Inspection procedure.

4.5.1 Examination. The saw shall be examined for the following defects:

101. Saw blade diameter not as specified (see 3.1.2).
102. Material not as specified (see 3.3).
103. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration of the applicable storage and operating environments (see 3.3.1).
104. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.2).
105. Contractor does not have documentation available for identification of materials, material finishes, or treatment (see 3.3.3).
106. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the saw (see 3.3.4).
107. Safety devices, brakes, and guards missing or not as specified (see 3.4, 3.9.6, and 3.11.6).
108. Parts subject to wear not accessible (see 3.5).
109. Frame not as specified (see 3.6).
110. Assembly incomplete or incorrect (see 3.7, and 3.8).
111. Cutting head locator not as specified (see 3.9.4).
112. Adjustments not as specified (see 3.9.5).
113. Motor mounting yoke not as specified (see 3.9.8).
114. Return device not as specified (see 3.9.9).
115. Gears, worms, and worm wheels not as specified (see 3.10).
116. Motor size and type not as specified (see 3.11.1).
117. Motor not as specified (see 3.11.2).
118. Motor protection and wiring not as specified (see 3.11.3).
119. Starter not as specified (see 3.11.4).
120. Cord not as specified (see 3.11.5).
121. Accessories, identification or other marking missing (see 3.12, 3.15, and 3.16).
122. Equipment furnished with saw not as specified (see 3.12.1).
123. Dadoing equipment not as specified (see 3.12.2.1).
124. Set of dado spacing collars not as specified (see 3.12.2.1.1).
125. Addition blades not as specified (see 3.12.2.3).
126. Roller tables not as specified (see 3.12.2.4).
127. Means for lubricating not as specified (see 3.13).
128. Fungus control not as specified (see 3.14).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

129. Treatment or painting not as specified (see 3.14 and 3.17).
130. Dimensions for style B saws not as specified (see 3.18).
131. Human factors not as specified (see 3.21).
132. Noise labeling not as specified (see 3.22).
133. Workmanship not as specified (see 3.23).

4.5.2 Tests. The cutting head and horizontal arm shall be adjusted prior to conducting the tests specified herein.

4.5.2.1 Arbor and flange. Check the eccentricity of the saw arbor at the point where the cutting tools will be applied. Check the eccentricity of the flange against which the saw blade is clamped. Runout in excess of 0.002 inch (total indicator reading) for the arbor and 0.0025 inch (total indicator reading) for the flange shall constitute failure of this test (see 3.9.7).

4.5.2.2 Cutting head travel. Check the accuracy of the cutting head travel by (1) crosscutting a board equal to the crosscut capacity specified in table I, (2) holding a steel straightedge along the edge cut, and (3) checking with a feeler gage vertically between the straightedge and cut board. Inaccuracy in straightness in excess of 0.008 inch per foot shall constitute failure of this test (see 3.1.1).

4.5.2.3 Crosscut test. Check the accuracy of saw travel and guide fence by (1) crosscutting a board with the end to be checked to the left of the saw; (2) crosscutting with the other end of the board to the right of the saw; (3) checking each cut by placing it in a steel square with a known squareness accuracy of not less than 0.001 in 10 inches, with the fence edge of the board held to the inside of the square; and (4) checking with a feeler gage vertically between the cut edge and the steel square. Width of board to be cut shall be as specified in table I under miter capacity. Inaccuracy in squareness in excess of 0.008 inch per foot shall constitute failure of this test (see 3.1.1).

4.5.2.4 Mitering. Check the accuracy of the 45 degrees miter by (1) mitering two boards not less than 20 inches long by 6 inches nominal width; (2) placing the miters together and checking with a carpenter's steel square along the inside edges; and (3) checking with a feeler gage vertically at the mating surfaces. Inaccuracy in excess of 0.010 inch per foot per board (0.020 inch per foot total) shall constitute failure of this test (see 3.8.3).

4.5.2.5 Beveling. Perform the beveling test as specified in 4.5.2.4 except set the saw for 45 degrees beveling instead of 45 degrees mitering (see 3.9.1, 3.9.2, and 3.9.3).

4.5.2.6 Shaping. Make a 5/16-inch bend and a 5/16-inch cove cut 11/16-inch wide and 11/16-inch deep around a rectangular test piece. The test piece shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

maple, birch, beech, walnut, or hardwood of similar cutting qualities. Chatter marks, gouges, roughness, or other markings shall constitute failure of this test (see 3.12.2.2).

4.5.2.7 Cutting head deflection. Upon completion of the tests specified in 4.5.2.1 through 4.5.2.6 and without any adjustment, test the saw for deflection as follows. Position the cutting head at its maximum distance from the upright column and clamp securely. Lock the cutting head in the crosscut position. Use a spring scale to apply the load specified in table II to the saw arbor axially in one direction. Measure the deflection of the arbor. Repeat the procedure in the other direction. Determine the total deflection of the saw arbor. Lock the cutting head in the rip position at its maximum distance from the upright column. Apply the load specified in table II vertically to the arbor both up and down. Determine the total deflection of the saw arbor with respect to the tabletop. When the load is removed, the dial indicator should return to within 0.001 inch of zero in each case. Noncompliance with the requirements specified in 3.9 shall constitute failure of this test.

4.5.2.8 Power brake. Test the braking time of the saw by operating the cutting-head motor at normal operating speed. Shut off the motor and check the time required for the motor to come to a complete stop. Braking time not within the range specified in table V shall constitute failure of this test.

4.6 Inspection of preparation for delivery. The preservation, packing, and marking for level A or B shall be examined and tested in accordance with the quality assurance provisions of MIL-M-18058. Commercial preservation, packaging, packing and marking shall be examined to determine compliance with ASTM D 3951.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each saw with accessories, attachments, repair parts, tools, and publications shall be preserved and packaged in accordance with the level A requirements of MIL-M-18058.

5.1.2 Commercial. Each saw with accessories, attachments, repair parts, tools, and publications shall be preserved and packaged in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Saws, preserved as specified in 5.1, shall be packed in accordance with the level A requirements of MIL-M-18058.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Saws, preserved as specified in 5.1, shall be packed in accordance with the level B requirements of MIL-M-18058.

5.2.3 Commercial. Saws, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. When feeder tables or any other optional equipment is required (see 6.2), the marking instructions for a set or assembly shall be adhered to as specified by MIL-STD-129, ASTM D 3951, or FED-STD-123.

5.3.1 Civil agencies. Packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military activities. Marking for level A or B shall be in accordance with MIL-STD-129. Marking for commercial shall be in accordance with ASTM D 3951.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The saws are intended for use in woodworking and cabinet shops, as well as in mobile shops, and are particularly adaptable for use in boxing and crating work in shipping departments.

6.1.1 Standard lumber size coverage. Table VII is provided to show the classes of saws required for specific thicknesses of lumber.

TABLE VII. Saw capacities for standard lumber.

Saw size	Rough size of standard lumber (inches)	Finished size of standard lumber (inches)
10	2	1-1/2
12	2 and 4	1-1/2 and 3-1/2
14	2 and 4	1-1/2 and 3-1/2
16	2 and 4	1-1/2 and 3-1/2
18	2, 4 and 6	1-1/2, 3-1/2 and 5-1/2
18L	2, 4 and 6	1-1/2, 3-1/2 and 5-1/2

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the currentversion before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Style, and size required (see 1.2).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article model is not required (see 3.2).
e. Time frame required for submission of first article model (see 3.2).
f. When tabletop depth is to be greater than the forward position of the saw (see 3.7.1).
g. Size, type, and voltage of motor required (see 3.11.1 and 6.7).
h. When weatherproof construction is required (see 3.11.4).
i. Optional equipment required (see 3.12.2).
j. Cutter shapes required (see 3.12.2.2).
k. When fungusproofing is required and type of fungusproofing (see 3.14).
l. When a separate identification plate is required (see 3.16).
m. Treatment and painting required if other than as specified (see 3.17).
n. When size 16 saws adapted for trailer mounting are required (see 3.18).
o. When a metal cabinet with door and latch is required (see 3.19).
p. Degree of preservation and packing required (see 5.1 and 5.2).
q. When the marking instructions for a set or assembly are required (see 5.3).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, military specifications and standards that have been cleared and listed in DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

6.5 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of saws.

6.6 Trailer mounting. When the saw is to be used for trailer mounting in SC 3220-97-CL-E01, the requirements in 3.18 through 3.18.3 should be specified.

6.7 3 phase motors. When 3 phase motors are required under 6.2, ordering data, the contracting officer should identify the necessary voltage requirements of the user. In the event that the voltage requirement information is not available then the following voltage guidelines are recommended. All size 10 and size 12 saws, both style A and style B, should be supplied with 200 volts unless 230/460 volts is specified by the user. All size 14, 16, 18, and 18L, style A saws should be supplied with 230/460 volts unless 200 or 575 volts is specified by the user. All size 14, 16, 18, and 18L, style B saws should be supplied with 200 volts unless 230/460 or 575 volts is specified by the user.

6.8 Information figures. Figures 1 and 2 are descriptive and not restrictive and are not intended to preclude the furnishing of saws which conform to this specification.

6.9 Subject term (key word) listing.

Arm
Blade
Circular
Electric
Overarm
Wood

MILITARY INTERESTS:
Custodians:
Army - ME
Air Force - 99
Review activities:
Air Force - 84
DLA - GS
User activity:
Navy - CG


CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing activity: ARMY - ME
Project 3220-0134

U.S. GOVERNMENT PRINTING OFFICE : 1983 - 381-595/5399

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

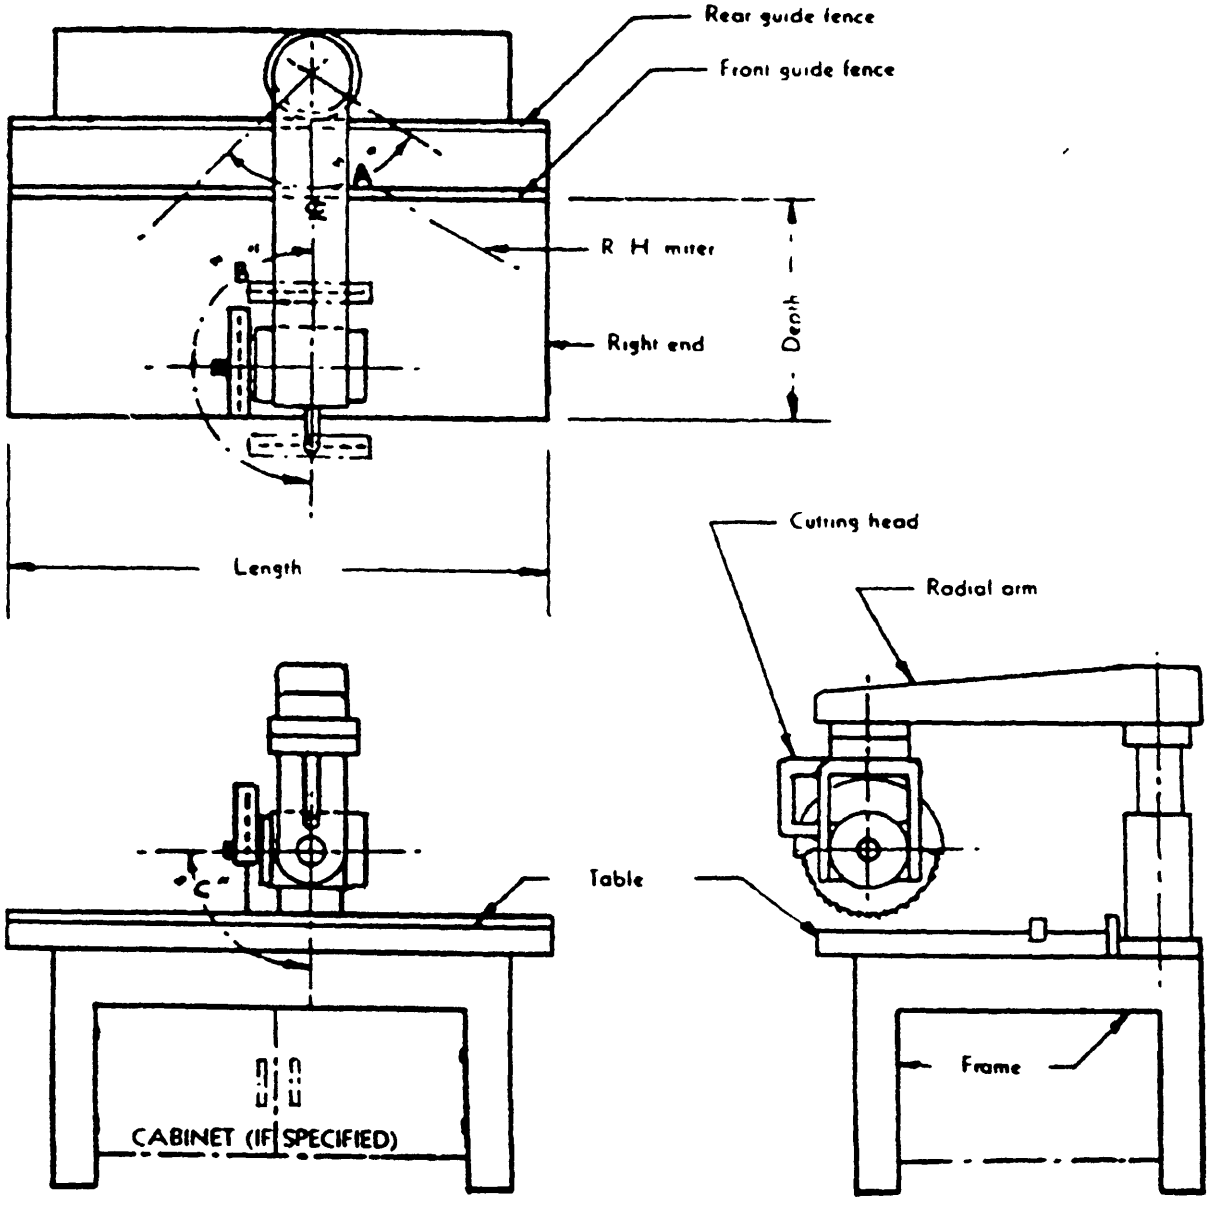

"A" = 105° Mitering { 45° One side of centerline. 90° Opposite side of centerline
"B" = 180° Cross-cutting to right- and left-hand ripping
"C" = 90° Beveling.

Figure 1. Saw adjustments (minimum).

X848

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

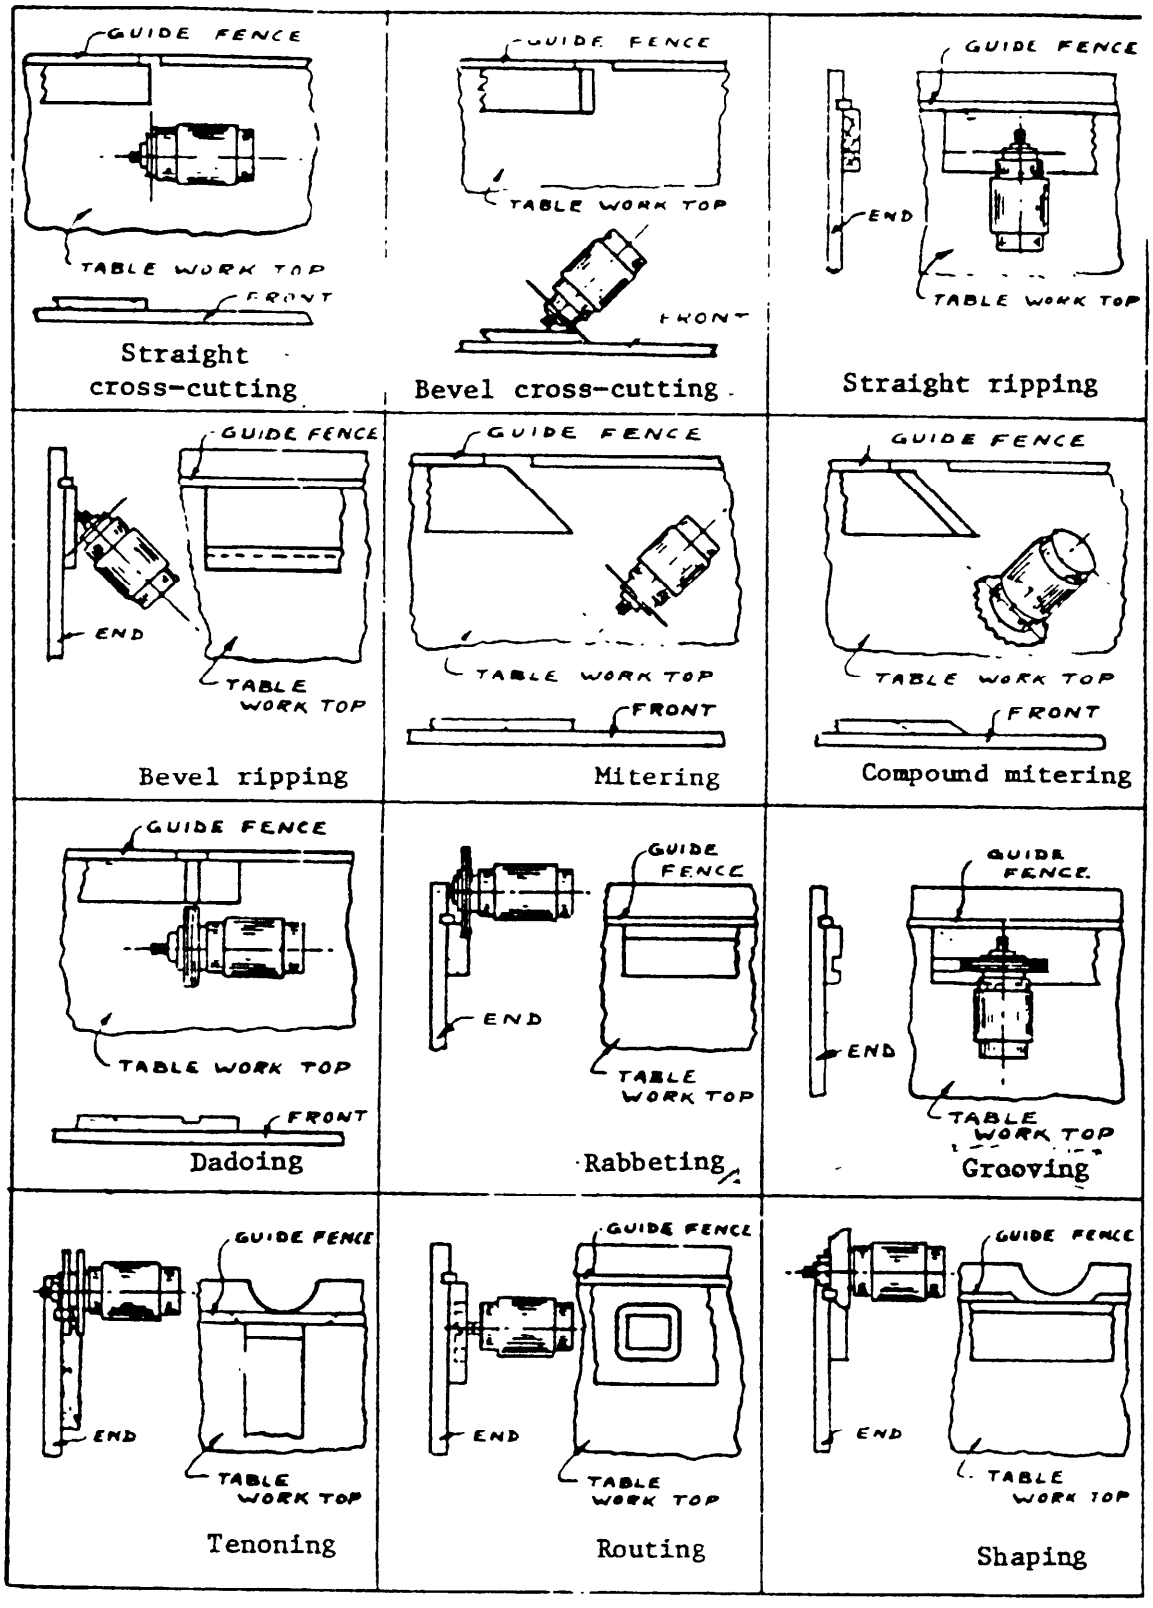


Figure 2. Typical saw operating shown without safety devices.

X849

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.


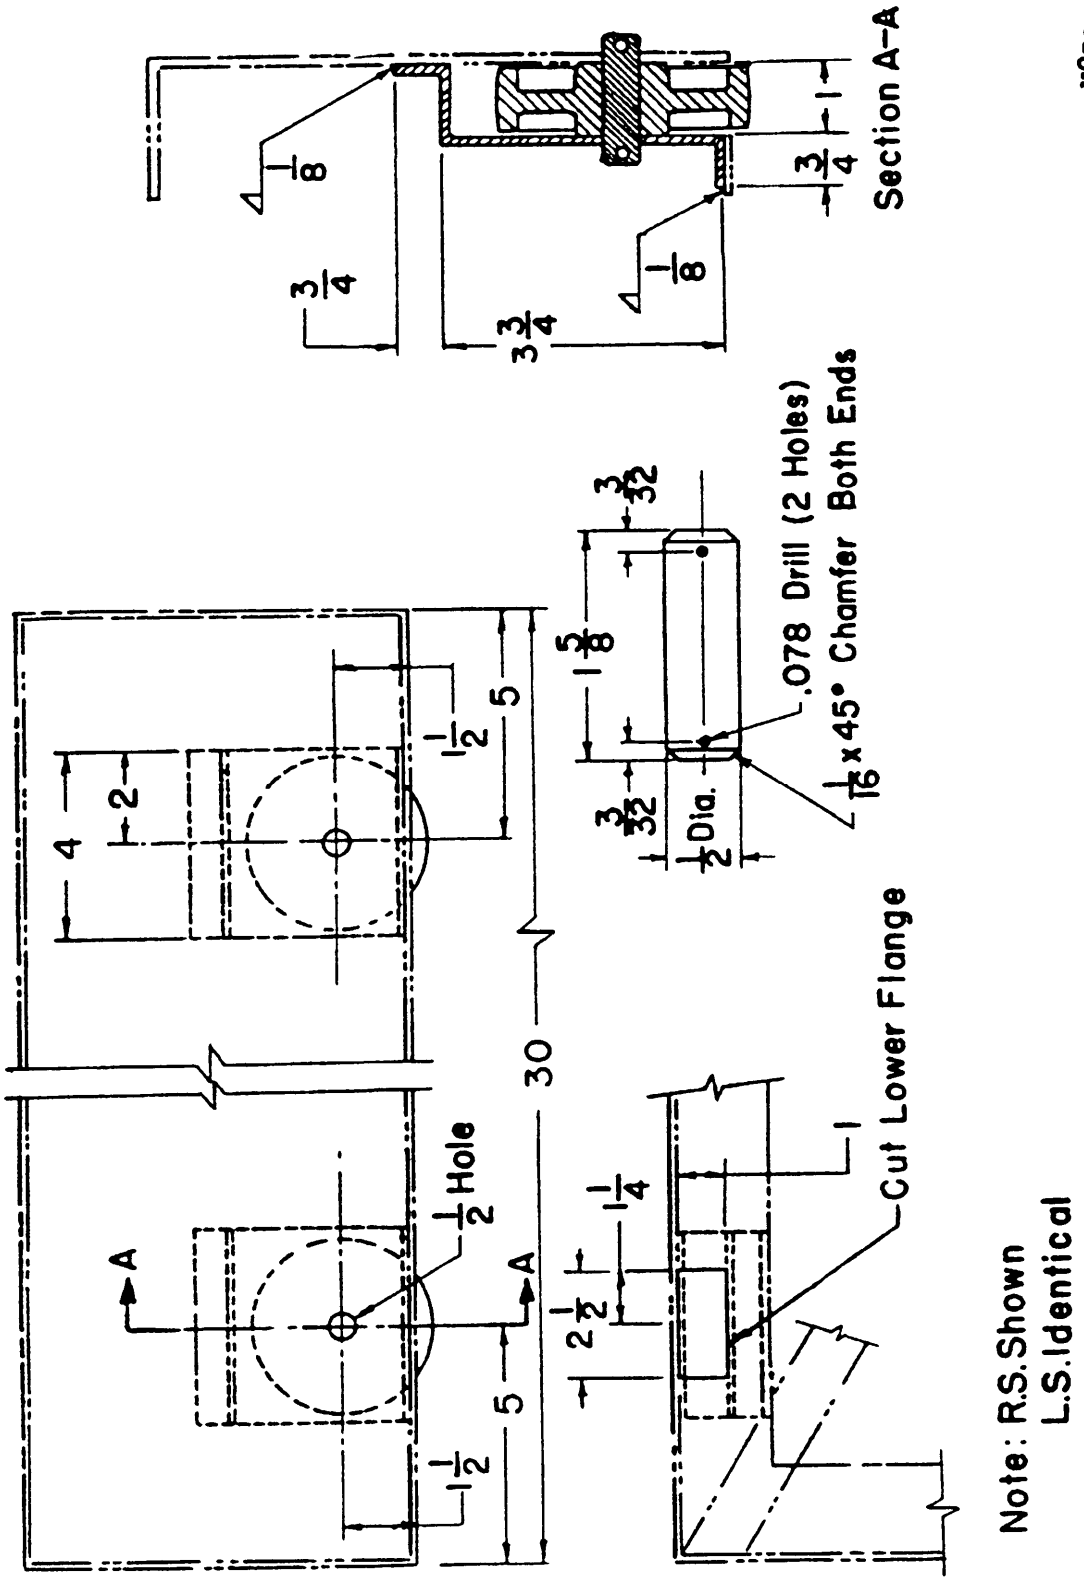


Figure 3. - Roller Bracket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

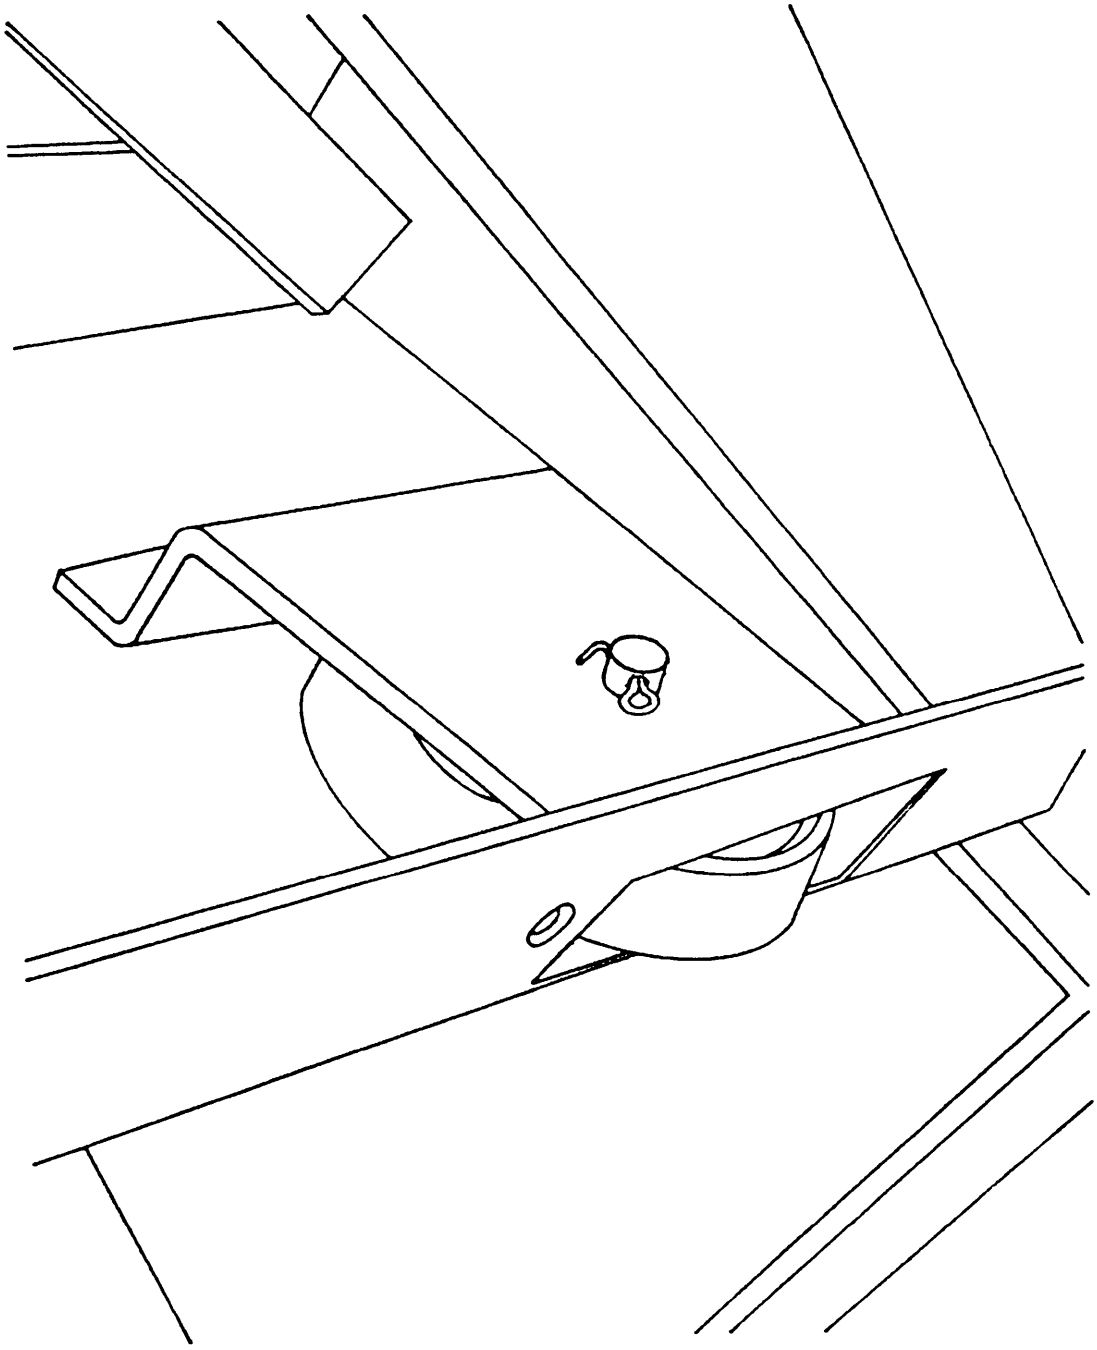

X851

FIGURE 4. ROLLER, SAW, TABLE FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

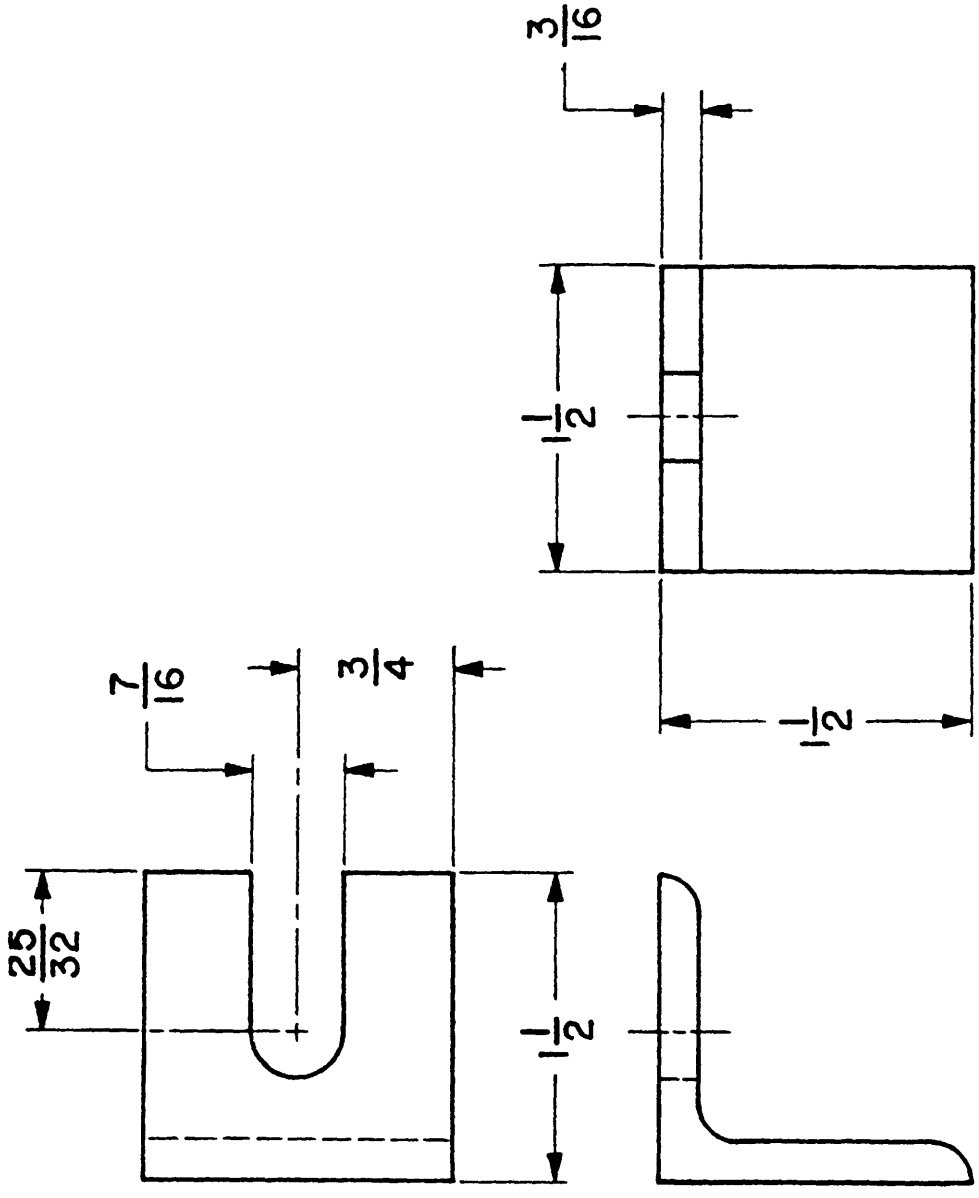


FIGURE 5. HOLD DOWN BRACKET CX-1001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

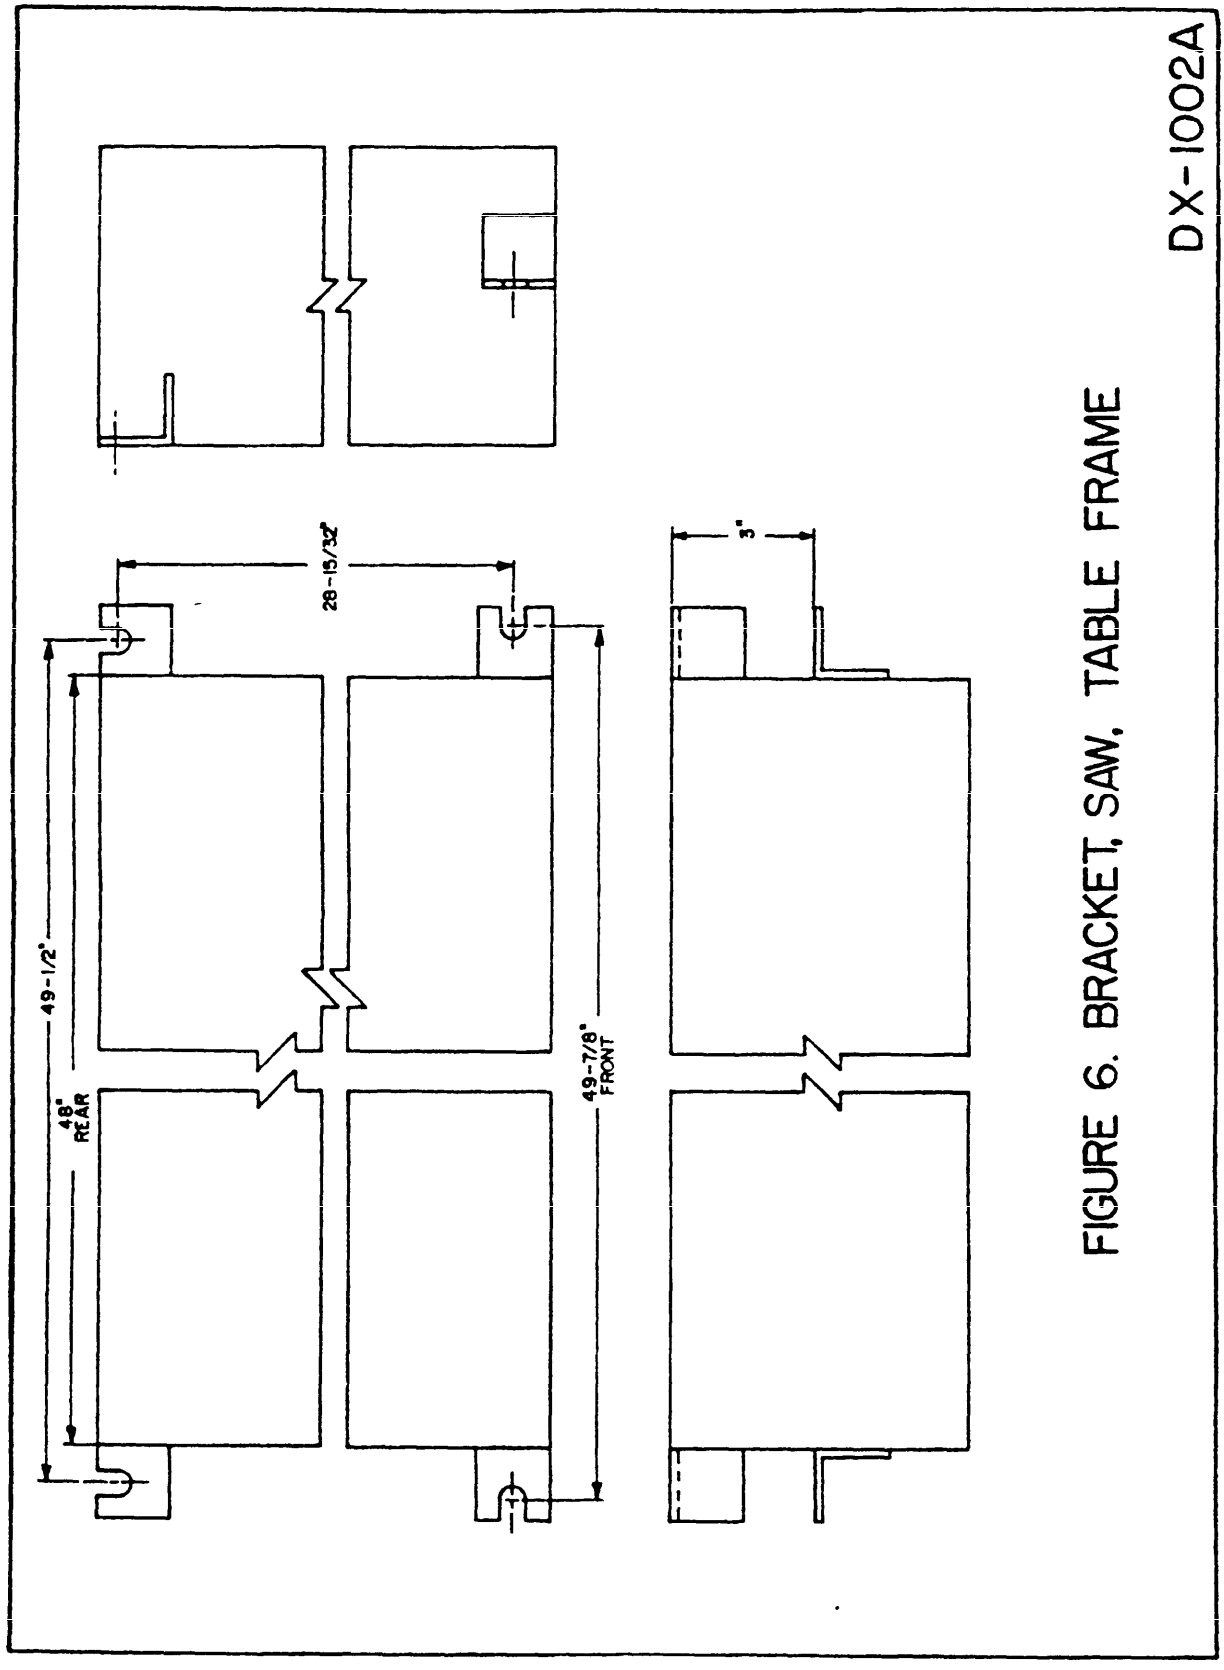


FIGURE 6. BRACKET, SAW, TABLE FRAME

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER GGG-S-58F	2. DOCUMENT DATE (YYMMDD) 930812

3. DOCUMENT TITLE
Saw, Radial Overam, Woodworking

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (if applicable) (2) AUTOVON	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Carolyn B. Johnson	b. TELEPHONE (Include Area Code) (1) Commercial (703) 704-3468 (2) AUTOVON 654-3468
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: SATBE-TSE Fort Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.