RR-B-130a
May 15, 1965

SUPERSEDING
Int. Fed. Spec. RR-B-00130 (Army-GL)
August 4, 1964 and
Fed. Spec. RR-A-466b (in part)
February 5, 1962 (See 6.3)

FEDERAL SPECIFICATION

BASIN, WASH; AND PAILS, METAL, (ALUMINUM)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for an aluminum wash basin and metal pails.

1.2 Classification.

1.2.1 *Types and capacities.* The items covered by this specification shall be of the following types and capacities as specified (see 6.2).

Type I—Basin, wash
  Capacity—3-quart (fig. 1)
Type II—Pails, metal
  Capacity—12-quart (fig. 2)
  Capacity—24-quart (fig. 2)

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-A-225/2—Aluminum Alloy Bar, Rod, and Wire, Rolled, Drawn, or Cold Finished, 3003.
QQ-A-250/2—Aluminum Alloy 3003, Plate and Sheet.
QQ-A-250/8—Aluminum Alloy 5052, Plate and Sheet.
QQ-W-461—Wire, Steel, Carbon, (Round, Bare and Coated).
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-L-10547—Liners, Case, and Sheet, Overwrap; Water Vaporproof or Waterproof, Flexible.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard product. The wash basins and metal pails shall be the standard current models of the manufacturer except for any changes as specified herein.

3.2 Preproduction sample. When specified (see 6.2), before production is commenced, a sample basin or pail as applicable shall be made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.3 Materials. The materials used shall conform to the applicable referenced specifications, standards, and requirements specified hereinafter. Where materials are not definitely specified, they shall be of the quality and type normally used for the purpose in commercial practice. All materials shall be new and unused.

3.3.1 *Aluminum.*

3.3.1.1 *Plate and sheet.*

3.3.1.1.1 *Alloy* 5052. Plate and sheet aluminum alloy 5052 shall conform to QQ-A-250/8.

3.3.1.1.2 *Alloy* 3003. Plate and sheet aluminum alloy 3003 shall conform to QQ-A-250/2.

3.3.1.2 *Bar, rod, and wire.*

3.3.1.2.1 *Alloy* 3003. Bars, rods, and wire aluminum alloy 3003, rolled or drawn or cold finished shall conform to temper "O" of QQ-A-225/2.

3.3.2 *Wire, steel.* Steel wire shall conform to steel numbers 1010-1015 or 1020 finish 3, class 2 of QQ-W-461.

3.4 Construction. The wash basins and pails shall be fabricated of metal specified herein. The illustrations shown for the basin or pails form a part of this specification and are only for the purpose of illustrating the general exterior appearance, design and typical features of the items, and are not intended to preclude the purchase of items which are otherwise in accordance with the specification. The basins and pails as applicable, shall be clean, sound, smooth, and free from buckles, cracks, sharp or rough edges.

3.4.1 *Capacities.* Capacities specified shall be interpreted to permit a plus tolerance of 10 percent (see 4.4.2).

3.4.2 *Spot welding.* Spot welding shall be performed by a welding machine, capable of consistent reproduction of timed, well-fused welds of maximum strength, free from discoloration.

3.5 Detail requirements.

3.5.1 *Type I, wash basin.* The type I wash basin shall be of 3-quart capacity. The basin shall be formed seamless from a single piece of aluminum alloy sheet of one half hard temper specified in 3.3.1.1.2. The finished thickness of the formed basin shall be not less than 0.0508 inch. The top of the basin shall be formed with a flared half rolled edge. The basin rim shall have a hole punched or drilled to permit hanging. The hole shall be not more than 3/8 inches in diameter, and its center shall be located equidistant from the rims inner and outer circumferences.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

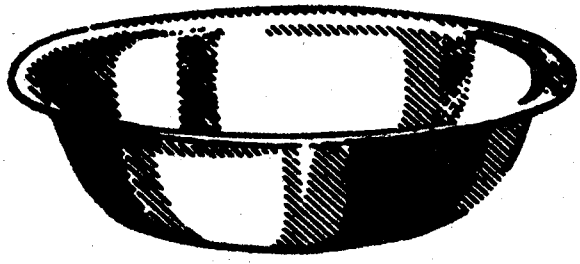


FIGURE 1—Type I, basin, wash

3.5.2 *Type II, metal pails.* The type II metal pails shall be 12 or 24-quart capacity as specified.

3.5.2.1 *Body.* The body for pails shall be formed seamless from a single piece of aluminum alloy sheet, temper "O" specified in 3.3.1.1.1 or 3.3.1.1.2. The finished thickness of the 12-quart capacity pail shall be not less than 0.081 inch, and for the 24-quart capacity pail not less than 0.102 inch. The top edge of the 12- and 24-quart capacity pails shall have a half rolled bead, and shall be symmetrical around the entire edge.

3.3.2.2 *Ears.* Ears for pails shall be formed from a single piece of aluminum alloy sheet specified in 3.3.1.1.1 or 3.3.1.1.2 and shall be not less than 0.081-inch thick. Each ear shall be attached to the pail on diametrically opposite points near the upper edge, by a minimum of 3 spot welds or 3 aluminum low profile head rivets. When ears are welded, the welds shall be sound, smooth, and free from cracks or burn holes. The ears when tested as specified in 4.4.1 shall hold a weight equivalent to four times the pail's water capacity and the ears shall not become distorted or the rivets pull out.

3.5.2.3 *Bail.* The bail shall be formed from tin-coated steel wire specified in 3.3.2, from galvanized steel wire or from aluminum rod specified in 3.3.1.2.1, having a diameter of not less than 0.250 inches. The bail shall be bent into a semicircle having a diameter not less than 1-inch greater than the top of the pail. The bail ends shall be formed into loops and pressed closed to engage the ears specified in 3.5.2.2. The loops shall be of a size and shape to permit the bail to move freely in the ears without binding or catching, and to set in the down position against the side. The bail shall not become distorted or bail loops pull out when tested as specified in 4.4.1.

3.5.2.4 *Back handle.* The 24-quart capacity pail only shall be equipped with a back handle. The back handle shall be formed from aluminum alloy bar specified in 3.3.1.2.1. The thickness of bar used shall be nominal 0.187 inch and the width shall be 1 inch ± 1/32 inch. The handle shall be formed to a shape or contour providing a good hand grip and shall be located in a horizontal position midway between the ears and near the bottom of the pail. The handle shall be attached by spot welds or by aluminum low profile head rivets at each end of the handle. Welds shall be sound, smooth, and free from cracks or burn holes. Rivets shall be securely headed and set without burrs or rough edges.

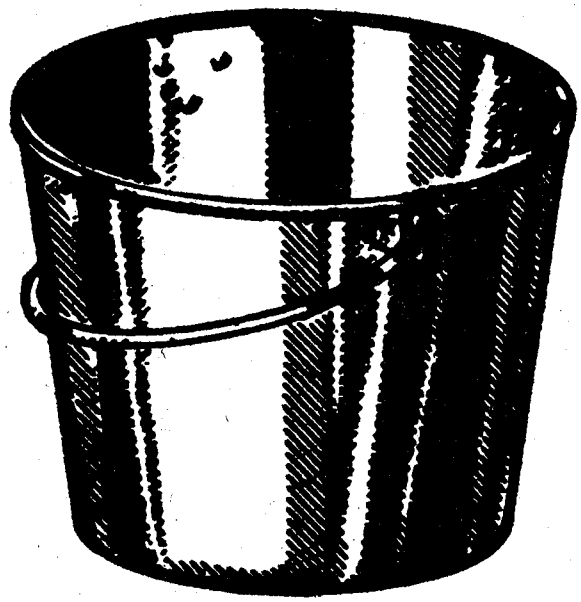


FIGURE 2—Type II, pail, metal

3.6 **Finish.** The wash basin and pails shall be cleaned in accordance with the manufacturer's standard practice. The basin and pails shall be free from dirt, smudges, oil, grease or foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.6.1 *Basin.* Unless otherwise specified (see 6.2), the finish of the wash basin shall be the manufacturer's standard commercial finish.

3.6.2 *Pail 12-, and 24-quart capacity.* Unless otherwise specified (see 6.2), the finish of the 12- and 24-quart capacity pails shall be the manufacturer's standard commercial finish.

3.7 **Identification marking.** The completely fabricated basins or pails as applicable shall be marked in a location and size consistent with the manufacturer's practice. The item shall be permanently and legibly marked with the item's capacity, and the manufacturer's identification.

3.8 **Workmanship.** The workmanship of the finished basins or pails as applicable shall conform to the quality and grade of product established by this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Preproduction sample inspection.** When a preproduction sample is required, it shall be examined for defects in table I and specified dimensions. The preproduction sample shall be tested in accordance with 4.4.1 and 4.4.2.

4.3 **Sampling for inspection and acceptance.** Sampling for inspection and acceptance shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified herein, or if none, in accordance with this specification.

4.3.2 *End item inspection.* The lot shall be all basins or all pails of one capacity offered for acceptance at one time. The unit of product shall be one completely finished basin or pail.

4.3.2.1 *Visual examination.* The end item shall be examined in accordance with the classification of defects in table I. The inspection level shall be level II, with an acceptable quality level of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. *Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Finish	Basin or pail not finished as specified.		X
	Deep scratch or tool mark on interior surface. (To be determined by use of thumbnail.)	X	
	Dirt, smudge, oil, grease or foreign matter.		X
Construction and workmanship (general)	Component missing.	X	
	Component malformed, buckled, or bent.	X	
	Split, cracked, fractured, punctured, deep dent.	X	
	Shallow dent or wrinkle.		X
	Sharp edge or burr.	X	
	Bail binds or will not set in a down position against sides.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. *Classification of defects (cont'd)*

Examine	Defect	Classification	
		Major	Minor
Basin	Hole in rim missing.	X	
	Hole not centered in rim.		X
Back handles or bails (as applicable)	Not connected or joined as specified or poorly accomplished.	X	
Ears	Not diametrically attached at opposite points.	X	
	Not attached near upper edge.	X	
Welding (when applicable)	Not type specified.		X
	Missing, incomplete, cracked, or not fused.	X	
Beading (where required)	Omitted or not as specified.	X	
	Not even.		X
Rivets (where required)	Not aluminum.	X	
	Missing, broken, fractured, or loose.	X	
Marking (identification and capacity)	Missing, incomplete, incorrect, not legible.		X

4.3.2.2 *Dimensional examination.* Inspection shall be made of the end item to determine compliance with dimensions specified. Any dimension not in conformance as specified shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.2.3 *Testing of the end item.* The bails and ears shall be tested as specified in 4.4.1. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 *Examination of preparation for delivery.*

4.3.3.1 *Examination for count and marking of intermediate packages.* The basins or pails as applicable, packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The unit of products for this examination shall be one intermediate package of basins or pails of one capacity. The lot shall be the number of intermediate packages offered for inspection at one time. Any package containing less than the specified or marked quantity of basins or pails as applicable, shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3.2 *Examination of packing and marking.* An examination will be made to determine that packing and marking comply with the requirements of section 5. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. *Examination of packing and marking*

Examine	Defect
Marking (exterior and interior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components such as incomplete closure of case liners or container flaps; loose strapping or tape banding; inadequate stapling; bulging or distortion of containers.
Contents per container	Number of intermediate packages is more or less than required.

4.4 Tests.

4.4.1 *Bail and ears test.* The metal pail shall be loaded with a weight equivalent to four times the weight of the water capacity of the pail and lifted by the bail to a posi-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

tion of normal use. The bail and ears shall be examined to determine compliance with 3.5.2.2, and 3.5.2.3 respectively.

4.4.2 *Capacity.* The basin or pail as applicable shall be filled to capacity with water and the water measured to determine compliance with 3.4.1.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A or B.*

5.1.1.1 *Unit package.* Each wash basin and pail shall be individually wrapped in two thicknesses of kraft paper having a minimum basis weight of ten pounds (25 by 36-500).

5.1.1.2 *Intermediate package.* Six nestable wash basins, or pails, partially nestable, of one capacity only, unit packaged as specified in 5.1.1.1, shall be packaged in a snug-fitting fiberboard box conforming to type CF or SF, class domestic, grade 200 of PPP-B-636. Each box shall be closed in accordance with the appendix of the box specification.

5.1.2 *Level C.* Wash basins or pails shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Basins or pails of one capacity only, packaged as specified in 5.1, shall be packed in the quantities specified in table III in snug-fitting shipping containers conforming to V3c or V3s of PPP-B-636; or class 2, style 2 or 4 of PPP-B-621. Each fiberboard shipping container shall be waterproofed by means of tape in accordance with the appendix of PPP-B-636. Other shipping containers shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Each shipping container shall be closed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the applicable container specification.

TABLE III. *Package quantities*

Item	Number of intermediate packages	Quantity per shipping container
Type I—Basin, wash	(*Level A*)	
Capacity—3-quart	6	36
Type II—Pail, metal		
Capacity—12-quart	2	12
Capacity—24-quart	2	12

5.2.2 *Level B.* Basins or pails of one capacity only, packaged as specified in 5.1, shall be packed in the quantities as specified in table III, in snug-fitting shipping containers conforming to type CF or SF, class domestic, grade 275 of PPP-B-636; or class 1, style 2 or 4 of PPP-B-621. Closure for fiberboard shipping containers shall be in accordance with the appendix of the container specification.

5.2.3 *Level C.* Basins or pails, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The wash basin and metal pails covered by this specification are intended for general service use by Department of Defense and civil agencies as domestic and institutional equipment.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and capacity required (see 1.2).

(*c*) When a preproduction sample is required (see 3.2).

(*d*) Type finish required (see 3.6.1 and 3.6.2).

(*e*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Supersession data. The wash basins and metal pails covered in this specification were formerly a part of RR-A-466b, dated February 5, 1962.

Type I—3-quart capacity was type XXVII, 3-quart wash basin.

Type II—capacity 12-quart and capacity 24-quart, was type XV, sizes 1 and 5, respectively.

6.4 Transportation description. The transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Aluminum articles, not otherwise indexed by name.
Carload minimum weights 14,000 and 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Aluminum articles, not otherwise indexed.
Truckload minimum weight 14,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY CUSTODIANS:

Army—GL
Navy—YD
Air Force—69

Review activities:

Army—MD
Navy—YD
Air Force—69

User activities:

Army—SM
Navy—MC

Preparing activity:

Army—GL

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Standardization Documents.

Copies of this specification may be purchased for ents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.