RR-B-130B
February 9, 1970
SUPERSEDING
Fed. Spec. RR-B-130A
May 15, 1965

FEDERAL SPECIFICATION

BASIN, WASH; AND PAILS, UTILITY, ALUMINUM

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an aluminum alloy wash basin and utility pails.

1.2 Classification. The wash basin and utility pails covered by this specification shall be of the following types and capacities as specified (see 6.2):

Type I - Basin, wash, 3-quart capacity.
Type II - Pail, utility.

Capacity - 10-quart.
Capacity - 12-quart.
Capacity - 52-quart.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-A-225/2 - Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn or Cold Finished, 3003.
QQ-A-225/7 - Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn or Cold Finished, 5052.
QQ-A-225/8 - Aluminum Alloy Bar, Rod, and Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

QQ-A-225/8 - Aluminum Alloy Bar, Rod and Wire; Rolled, Drawn or Cold Finished, 6061.
QQ-A-250/2 - Aluminum Alloy 3003, Plate and Sheet.
QQ-A-250/8 - Aluminum Alloy 5052, Plate and Sheet.
QQ-W-423 - Wire, Steel Corrosion-Resistant.
QQ-W-461 - Wire, Steel, Carbon, (Round, Bare, and Coated).
PPP-B-636 - Box, Fiberboard.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are generally available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to American Trucking Associations, Inc., Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

American Society For Testing and Materials (ASTM) Standard:

A167 - Standard Specification for Corrosion-Resisting Chromium Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

(Technical society and technical association specifications and standards are generally available from reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, the supplier shall submit a preproduction sample to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Standard product. The basin and pails covered by this specification shall be the manufacturer's current commercial product except for any changes necessary to comply with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for basin and pails provided the completed items comply with all provisions of this specification.

3.3.1 Aluminum alloy, plate and sheet. Aluminum alloy plate and sheet shall be either alloy 3003 conforming to QQ-A-250/2 or alloy 5052 conforming to QQ-A-250/8.

3.3.2 Aluminum rod and wire. Aluminum alloy rod and wire shall be alloy 3003 conforming to QQ-A-225/2, or alloy 5052 conforming to QQ-A-225/7, or alloy 6061 conforming to QQ-A-225/8.

3.3.3 Corrosion-resisting steel sheet. Corrosion-resisting steel sheet shall conform to type 302, 304, or 430 of ASTM A167-63 and shall be a minimum of 0.067 inch thick.

3.3.4 Steel wire. Carbon steel wire shall conform to steel numbers 1010, 1015, or 1020, finish 3, or class 2, finish 5 of QQ-W-461. Corrosion-resisting steel wire shall conform to form 1, condition A, composition 302, 304, or 430 of QQ-W-423.

3.4 Design and construction. The wash basin shall be similar to figure 1. The 10 and 12-quart pails shall be similar to figure 2. The construction of the 52-quart pail shall conform to figure 3. Figures 1 and 2 are intended for illustration purposes only and are not intended to preclude items otherwise meeting the requirements of this specification. Whole number and fractional dimensions shown on figure 3 are subject to commercial tolerances. Material thicknesses are minimum.

3.4.1 Wash basin. The wash basin shall have a capacity between 3 and 3.3 quarts and shall not leak when tested as specified in 4.4.1. The basin shall be formed seamless from a single piece of aluminum alloy 3003-H14 or 3003-H24 specified in 3.3.1. The finished thickness shall be not less than 0.0508 inch. The top of the basin shall be formed with a flared, half-rolled edge. The basin rim shall have a hole not more than 3/8 inch in diameter, centered between the inner and outer circumference of the rim.

3.4.2 Utility pails. The utility pails shall have the following capacities when tested as specified in 4.4.1:

10-quart pail - 10 to 11 quarts
12-quart pail - 12 to 13.2 quarts
52-quart pail - 52 to 54 quarts

The 10 and 12-quart pails shall consist of a body, ears, and a bail. The 52-quart pail shall consist of a body and two lifting handles. The pails shall show

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

no evidence of leakage when tested as specified in 4.4.1. The 10-quart pail shall hold 60 pounds, the 12-quart pail shall hold 72 pounds, and the 52-quart pail shall hold 300 pounds without distortion or fracture of the ears, bail, or handles as applicable, and without separation of spot welds or rivets when tested as specified in 4.4.2.

3.4.2.1 Body. The pail body shall be formed from aluminum alloy 3003-0 or 5052-0 specified in 3.3.1. The body of the 10 and 12-quart pails shall be formed seamless from a single piece of metal. The body of the 52-quart pail shall be formed with seams. The finished thickness of the 10 and 12-quart body shall be not less than 0.080 inch. The finished thickness of the 52-quart body shall be as shown on figure 3. The top edge of the body for the 10 and 12-quart pails shall have either a half-rolled or full-rolled bead and shall be symmetrical around the edge.

3.4.2.2 Ears and handles. Ears for the 10 and 12-quart pails and lifting handles for the 52-quart pail shall be formed from a single piece of aluminum alloy 3003 or 5052 specified in 3.3.1. Ears for the 10 and 12-quart pails may also be formed from corrosion-resisting steel specified in 3.3.3. The thickness of the aluminum alloy ears shall be not less than 0.080 inch. Each ear shall be attached to the pail on diametrically opposite points near the upper edge by not less than 3 aluminum, low profile head rivets. Aluminum alloy ears may be spot welded to the body. The lifting handles shall be located as shown on figure 3.

3.4.2.3 Bail. The bail for the 10 and 12-quart pails shall be formed of the rod or wire specified in 3.3.2 or 3.3.4. The diameter of the rod or wire shall be not less than 0.250 inch. The bail shall be bent into a semicircle having a diameter not less than 1 inch greater than the top of the pail. The bail ends shall be formed into loops and closed after engaging the ears. The loops shall be of a size and shape to permit the bail to move in the ears without binding or catching and to set in the down position against the side of the body.

3.5 Finish. Unless otherwise specified (see 6.2), the wash basin and utility pails shall be finished in accordance with the manufacturer's current commercial practice.

3.6 Marking for identification. The manufacturer shall permanently and legibly indent his name or trademark of such known characters easily identifiable with said manufacturer on each basin and pail.

3.7 Workmanship. The basins and pails, as applicable, shall be free of splits, cracks, fractures, punctures, dents, burrs, sharp edges, dirt, or foreign matter. Interior surfaces shall be free of deep scratches or tool marks. Welds shall be free of cracks or burn holes. Rivets shall not be loose or fractured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for the defects in table I, specified dimensions, and tested as specified in 4.4.1 and 4.4.2. The presence of any visual defect, any dimension not within specified requirements, or failure of any test shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification, or applicable purchase document.

4.3.2 End item inspection. The lot shall consist of all basins or all pails of one capacity offered for inspection at one time. The sample unit shall be one completely fabricated basin or pail.

4.3.2.1 Visual examination. Examination shall be made of the end item for defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Basin or pail not finished in accordance with manufacturer's standard practice (when applicable).		X
	Deep scratch or tool mark on interior surface.	X	
	Dirt or foreign matter.		X
Construction			
Wash basin	Hole in rim missing.	X	
	Hole not located as specified.		X
	Not seamless.	X	
Pails (10 and 12-quart)	Not seamless.	X	
	Ear or bail missing.	X	
	Bail binds, catches, or will not set against body sides.		X
	Component not joined as specified.	X	
	Ears not attached at diametrically opposite points.	X	
(52-quart)	Handle(s) missing.	X	
	Handle(s) not located as specified.		X
Workmanship	Split, crack, fracture, puncture, dent, burr, or sharp edge.	X	
Welds (as applicable)	Crack or burn hole.	X	
Rivets (as applicable)	Burr or sharp edge, missing, fractured, or loose.	X	
Beading	Omitted or not as specified.	X	
Identification marking	Missing, incomplete, not legible.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions and tolerances specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item. The end item shall be tested as specified in 4.4.1 and 4.4.2. The inspection level shall be S-1 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing,and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examination	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components, such as incomplete wrapping of items.
Contents	Number per container is more or less than required for interior package and shipping container.

4.3.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

4.3.3.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as specified in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.4 Tests.

4.4.1 Capacity and leakage test. The basin or pail, as applicable shall be filled to capacity with water. The basin or pail as applicable shall be suspended by the rim of the basin or by the bail or handle of the pail for not less than 5 minutes and observed for leaks. The water capacity shall then be measured. Any leakage or nonconformance with the capacity specified in 3.4.2 shall constitute failure of these tests.

4.4.2 Lifting device test. The 10-quart pail shall be loaded with a minimum of 60 pounds, the 12-quart pail shall be loaded with a minimum of 72 pounds, and the 52-quart pail shall be loaded with a minimum of 300 pounds, as applicable. The loaded pail shall be lifted by the bail or lifting handles and suspended for not less than 5 minutes. Failure of spot welds, rivets, or evidence of distortion of the bail, ears, or handles as required by 3.4.2 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each wash basin and pail shall be individually wrapped in two thicknesses of minimum ten pound basis weight (24 x 36-500) kraft paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

5.1.1.2 Intermediate packaging. Wash basins or pails of one capacity only, unit packaged as specified in 5.1.1.1, shall be nested in the quantities specified in table IV and packaged in a snug-fitting fiberboard box conforming to type CF (variety SW) or SF, class domestic, grade 200, style RSC of PPP-B-636. Closure shall be in accordance with the appendix of PPP-B-636.

TABLE IV. Package quantities

Item	Number of items per intermediate package	Number of intermediate packages per shipping container	Number of items per shipping container
Basin, wash, capacity, 3-quart	6	6	36
Pail, utility			
10-quart	6	2	12
12-quart	6	2	12
52-quart	3	2	6

5.1.2 Level C. Wash basins or pails shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A. Basins or pails of one capacity only, packaged as specified in 5.1, shall be packed in the quantities specified in table IV in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Basins or pails of one capacity only, packaged as specified in 5.1, shall be packed in the quantities specified in table IV in a snug-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275, style RSC of PPP-B-636. Closure shall be in accordance with Method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Basins or pails, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization (military requirements). Unless otherwise specified (see 6.2), items packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The wash basin and utility pails covered by this specification are intended for general service use by Department of Defense and civil agencies as domestic and institutional equipment.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.

(b) Type and capacity required (see 1.2).

(c) First article. When a preproduction sample is required (see 3.1).

(d) Finish required, if other than specified (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(f) When weather-resistant grade fiberboard shipping containers are required for Level B packing (see 5.2.2.1).

(g) When palletization is not required for Military agencies (see 5.3).

MILITARY CUSTODIANS:

Army - GL
Air Force - 84

Review activity:

Army - MD

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 7240-0134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.




FIGURE 1. Type I, basin, wash.




FIGURE 2. Type II, pail, utility, 10-quart and 12-quart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

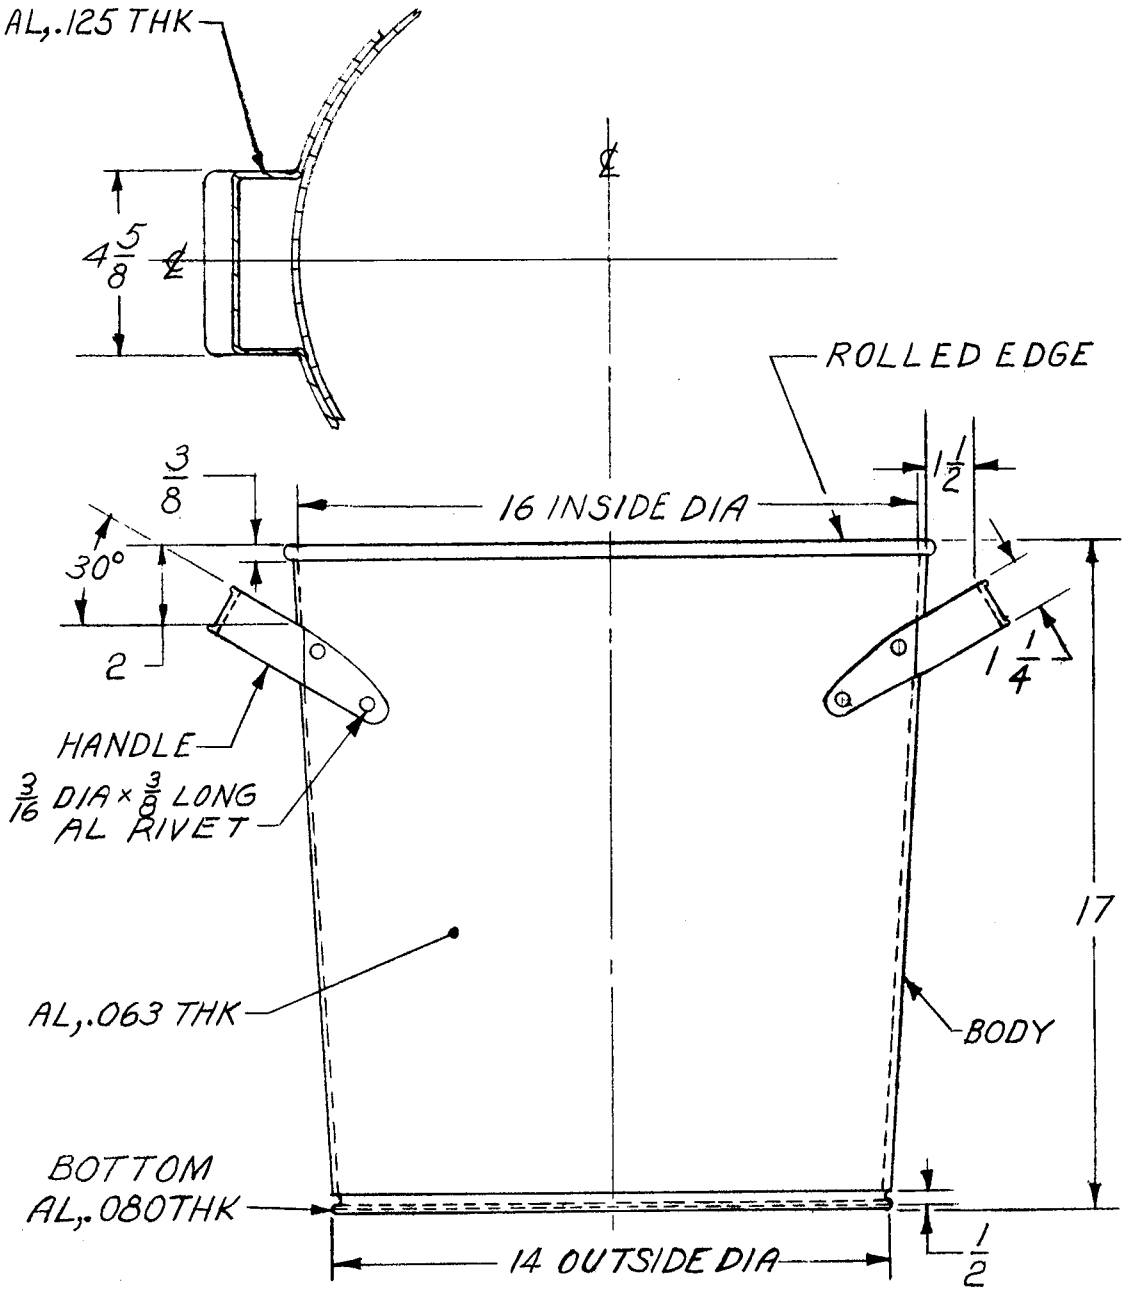


FIGURE 3. Pail, utility, 52-quart.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Basin, Wash; and Pails, Utility, Aluminum RR-B-130B

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.