RR-B-130C
August 3, 1977
SUPERSEDING
Fed.Spec. RR-B-130B
February 9, 1970
Fed.Spec. RR-T-177B
September 10, 1964 and
Int.Fed.Spec. RR-T-00771C
May 16, 1972

# FEDERAL SPECIFICATION

## BASIN, WASH AND TUB, FOOT, OVAL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a wash basin and foot tub.

1.2 Classification. The wash basin and foot tub covered by this specification shall be of the following types as specified (see 6.2):

| | | |
|---|---|---|
| Type I | - | Basin, wash, 3-quart (3 l) capacity. |
| Type III | - | Tub, foot. |

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

| | | |
|---|---|---|
| QQ-A-250/2 | - | Aluminum Alloy 3003, Plate and Sheet. |
| PPP-B-636 | - | Boxes, Shipping, Fiberboard. |

Federal Standard:

| | | |
|---|---|---|
| FED-STD-123 | - | Marking for Shipment (Civil Agencies). |

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly and supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Ft. Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points and their agencies.)

Military Standards:

| | | |
|---|---|---|
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | - | Marking for Shipment and Storage. |
| MIL-STD-147 | - | Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base. |

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Society For Testing and Materials (ASTM)

A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The basin and tub covered by this specification shall be the manufacturer's current commercial product except for any changes necessary to comply with requirements specified herein.

3.2 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for basin and tub provided the completed items comply with all provisions of this specification.

3.2.1 Aluminum alloy, plate and sheet. Aluminum alloy plate and sheet shall be either temper H-14 or H-24, 3003 alloy conforming to QQ-A-250/2.

3.2.2 Stainless steel sheet. Stainless steel sheet shall conform to type 302, 304, or 430 of ASTM A 167.

3.3 Design and construction. The wash basin shall be similar to figure 1. The tub shall be similar to figure 2. Figures 1 and 2 are intended for illustration purposes only and are not intended to preclude items otherwise meeting the requirements specified herein. Dimensions shown in figure 2 are approximate. Basins and tubs shall not leak when tested as specified in 4.3.1. The rim of the basin or tub shall have a 3/8 inch (10 mm) diameter hole centered between the inner and outer rim.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

3.3.1 Wash basin. The wash basin shall have a capacity between 3 and 3.3 quarts (2.8 l to 3.1 l). The basin shall be formed seamless from a single piece of aluminum alloy specified in 3.2.1. The finished thickness shall be not less than 0.0508 inch (1.290 mm). The top of the basin shall be formed with a flared, half-rolled edge.

3.3.2 Foot tub. The foot tub shall be formed seamless from a single piece of stainless steel specified in 3.2.2. The wall thickness shall be not less than 0.030 inch (0.76 mm). The top of the tub shall have a round close rolled beaded edge. The bottom shall be concave.

3.4 Finish. The wash basin shall be finished in accordance with the manufacturer's current commercial practice. The foot tub shall have a number 4 commercial polish or better.

3.5 Marking. The manufacturer shall permanently and legibly indent his name or trademark of such known characters to be easily identifiable with said manufacturer on each basin and tub.

3.6 Workmanship. The basins and tubs shall be free of splits, cracks, fractures, punctures, dents, burrs, sharp edges, dirt, or foreign matter. Interior surfaces shall be free of deep scratches or tool marks.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification, or applicable purchase document.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

4.2.2 End item inspection. The lot shall consist of all basins and tubs offered for inspection at one time. The sample unit shall be one completely fabricated basin or tub.

4.2.2.1 Visual examination. Examination shall be made of the end item for defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

| Examine | Defect | Classification Major | Classification Minor |
|---|---|---|---|
| Finish | Basin or tub not finished as specified. | | X |
| | Deep scratch or tool mark. | X | |
| | Dirt or foreign matter. | | X |
| Construction | Hole in rim missing. | X | |
| | Hole not located as specified. | | X |
| | Not seamless. | X | |
| | Edge not as specified. | X | |
| Workmanship | Split, crack, fracture, puncture, dent, burr, or sharp edge. | X | |
| | Bottom of tub not concave. | X | |
| Identification marking | Missing, incomplete, not legible. | | X |

4.2.2.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions and tolerances specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.2.2.3 Testing of the end item. The end item shall be tested as specified in 4.3.1. The inspection level shall be S-1 and the AQL shall be 4.0, expressed in terms of defects per hundred units.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking are in compliance with section 5. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

| Examination | Defect |
|---|---|
| Markings, exterior and interior | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |
| Materials | Component missing, damaged, or otherwise defective. |
| Workmanship | Inadequate application of components, such as incomplete wrapping of items. |
| Contents | Number of container is more or less than required for interior package and shipping container. |

4.2.3.1 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5. Defects shall be as specified in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

| Examination | Defect |
|---|---|
| Finished dimension | Length, width, or height exceeds specified maximum requirement. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps specified. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE III. Examination of palletization (cont'd)

| Examination | Defect |
|---|---|
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |

4.3 Tests.

4.3.1 Capacity and leakage test. The basin or tub, as applicable, shall be filled to the top with water. The basin or tub, as applicable, shall be suspended by the rim for not less than 5 minutes, any leak constitutes failure of the test of the basin. The capacity of the basin shall be measured. Any nonconformance with the capacity specified in 3.3.1 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each type I wash basin shall be individually wrapped in two thicknesses of minimum 10 pounds (4.5 kg) basis weight (24 x 36 - 500) kraft paper.

5.1.1.2 Intermediate packaging. Each type III foot tub or six type I wash basins shall be nested and intermediate packaged in a snug-fitting fiberboard box conforming to style RSC, type CF (variety SW) or type SF, class domestic, grade 200 of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Level C. Wash basins or foot tubs shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Thirty-six type I basins or 12 type III foot tubs, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of the container specification.

5.2.2 Level B packing. Thirty-six type I basins or 12 type III foot tubs, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or type SF, class domestic, grade 275 of PPP-P-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s, fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix thereto.

5.2.3 Level C. Basins or foot tubs packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Palletization. When specified (see 6.2), items packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the supplying officer.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2, as specified (see 6.2).

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The wash basin covered by this specification is intended for general service use as domestic and institutional equipment. The tub is intended for therapeutic foot bathing in medical facilities.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in the procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is required for Military agencies (see 5.3).
(f) Type marking required (see 5.4)

6.3 Supersession data. Federal Specifications RR-T-771B and RR-T-00771 (DLA-DM) are included in this document as type III. Type II has been included in Federal Specification RR-P-35.

Custodians:

Army - GL
Navy - MS
Air Force - 99

Review activities:

Army - MD
Air Force - 03
DLA - DM

Preparing activity:

Army - GL

Civil Agency Coordinating Interest:

GSA-FSS

Project No. 7240-0140




Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the current version before use.



Figure 1 - Type I, Basin, Wash



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

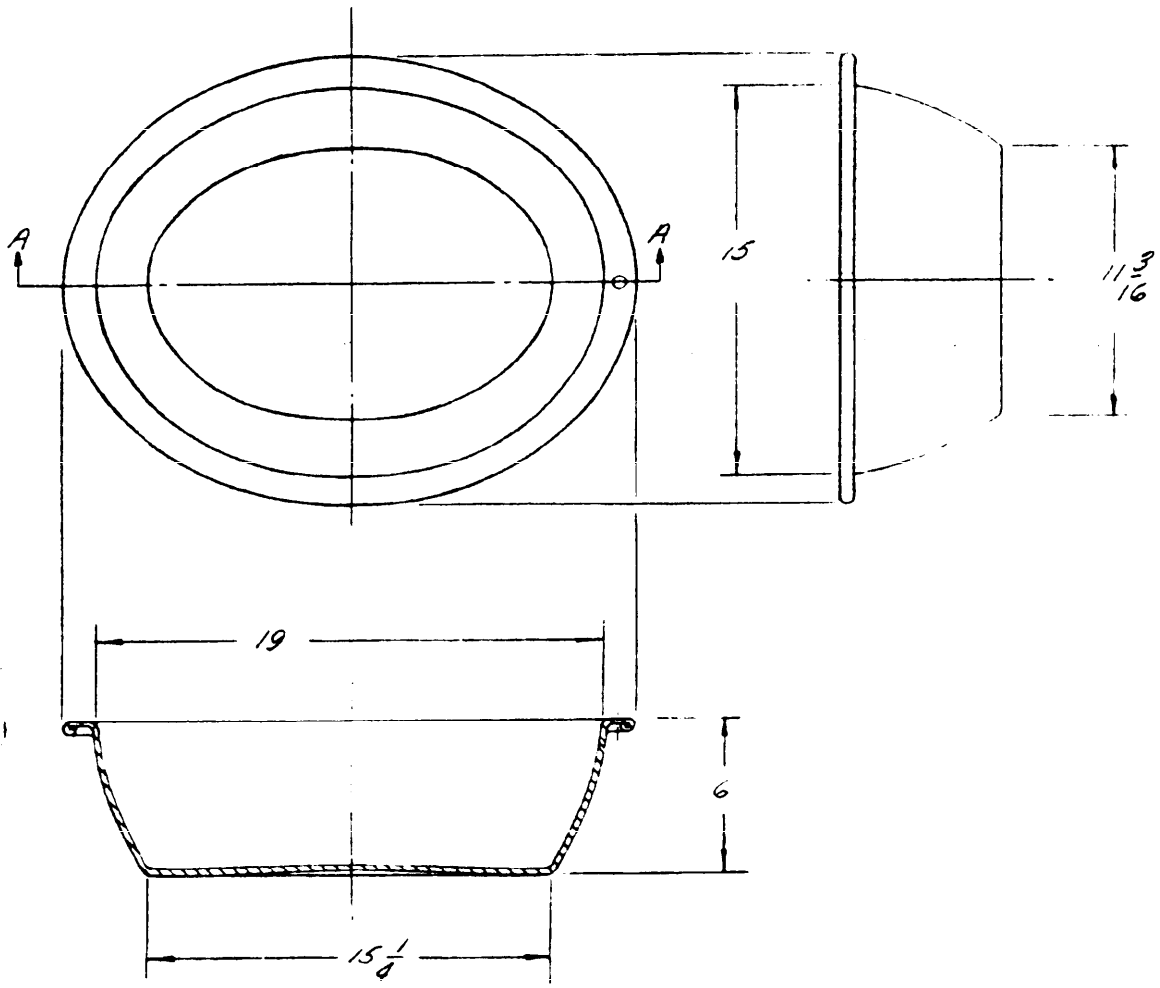


SECTION AA

FIGURE 2 TUB, FOOT, (CRES)

3-9-228A

U.S. GOVERNMENT PRINTING OFFICE : 1977 - 241-233/1130

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.



*U.S. GOVERNMENT PRINTING OFFICE: 1977—241 233.1130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.