RR-C-82D
January 24, 1969
SUPERSEDING
Fed. Spec. RR-C-82C
May 31, 1966

FEDERAL SPECIFICATION

CANS, ASH AND GARBAGE, CORRUGATED, TAPER-SIDE, ZINC-COATED: AND COVERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers corrugated zinc-coated metal cans with or without covers, or covers only (see 6.2).

1.2 Classification.

1.2.1 Can capacities. Cans shall be of the following nominal capacities as specified (see 6.2):

Capacity:

5-gallon.
10-gallon.
16-gallon.
24-gallon.
32-gallon.

1.2.2 Covers. Covers shall be for cans of the following capacities as specified (see 6.2): 5-, 10-, 16-, 24- and 32-gallons.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specifications:

QQ-S-630 - Steel, Bar, Carbon, Hot Rolled, (Merchant Quality).
QQ-S-634 - Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-698 - Steel, Sheet and Strip, Low-Carbon.
QQ-W-461 - Wire, Steel, Carbon (Round, Bare, and Coated).
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151 - Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for the sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40"X 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

American Trucking Associations, Inc.

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., 1916 P Street, N.W., Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 First article sample. When specified (see 6.2), before production is commenced, a sample can, with or without cover as applicable, shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. The cans and covers covered by this specification shall be the standard commercial items of the manufacturers except for changes necessary to conform to the requirements specified herein.

3.3 Materials. The materials shall conform to the applicable referenced specifications, standards, and requirements as specified herein. Materials not specified shall be of the quality used in current industry practice.

3.3.1 Steel, carbon.

3.3.1.1 Sheet or strip. Sheet or strip steel shall conform to hot-rolled or cold-rolled commercial quality of QQ-S-698.

3.3.1.2 Bar, flat. Flat bar steel shall conform to hot-rolled, as rolled finish, steel numbers M1010 through M1020 of QQ-S-630, or cold drawn (CD) condition, steel numbers 1010 through 1020 of QQ-S-634.

3.3.1.3 Wire. Steel wire shall conform to steel number 1010, 1015, or 1020, finish 1, temper hard, of QQ-W-461, except that at the option of the manufacturer, finish 5, temper hard, class 1 may be furnished for body handles (see 3.4.2.3) and bails (see 3.4.2.5.1).

3.3.2 Rivets, steel, flathead, tinners. Rivets shall be steel, flathead, commercial tinners type, as shown on figures 1 and 2, as applicable.

3.4 Design and construction. The design and construction of the cans and covers, shall conform to this specification and to the dimensions, and capacities as shown on figures 1, 2, and 3. Sixteen-gallon capacity and larger shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

so constructed that when cans of the same capacity are partially nested, they rest on the body handles. The completed cans, when tested as specified in 4.4.1 and 4.4.5, shall not deform more than 1 inch inwardly or outwardly in the overall can dimension (top or bottom bands, body side or bottom, bail and handle clips) or top or bottom bands loosen and shall not leak.

3.4.1 Capacities, can. The rated capacities, plus 1 percent, shall be the minimum capacity of the can when tested as specified in 4.4.6.

3.4.2 Bodies (all size cans). Can bodies shall be formed of two equal pieces of sheet steel specified in 3.3.1.1. Two horizontal stiffening corrugations shall be formed near the top. Vertical corrugations of the number shown on figures 1 and 2 shall be die formed in the body sheet. A horizontal stiffening corrugation shall be rolled into the body sheets, as applicable, and fabricated as shown on figures 1 and 2. All corrugations shall be of the dimensions (approximate) shown on figures 1 and 2. Side joints shall be grooved seams. The top and bottom bands shall be as shown on figures 1, 2, or 3 as reinforcing methods 1, 2, or 3. Interchange of top and bottom band construction will be permitted, provided that overall dimensions specified on figures 1, 2 and 3 are maintained. Alternate to riveting as shown for method 1 bottom band and method 2 top band (see figures 1 and 2). The bands may be either continuous welded or spot welded using not less than 2 spot welds for each rivet specified (see figures 1 and 2).

3.4.2.1 Bottoms. Bottoms shall be formed from one piece of sheet steel specified in 3.3.1.1, and shall be stiffened by three corrugations or concaving on the 5- and 10-gallon cans and by concaving on the 16-gallon and larger cans. The corrugations and concaving shall be of the dimensions shown on figures 1 and 2, as applicable. The edge of the bottom shall be fabricated as shown on figures 1, 2, or 3, as applicable.

3.4.2.2 Bands. Bands shall be made of steel bar specified in 3.3.1.2 or sheet steel specified in 3.3.1.1 and shall be butt welded.

3.4.2.3 Body handles. Body handles of the design shown on figure 2, shall be drop type, formed from steel wire specified in 3.3.1.3.

3.4.2.4 Clips for body handles (16-, 24-, and 32-gallon capacity). Clips for body handles shall be made from sheet steel specified in 3.3.1.1, formed to fit the corrugations or debossed flat area on can body, and so shaped that handles will come to a bearing when raised approximately 70 degrees. Clips shall be centered over body seams and riveted to the body, as shown on figures 1 and 2; or at the option of the supplier, welded with a minimum of four spot welds located as specified for riveting. Clips shall not become loose or pull away or the handle straps deformed more than 5 degrees when tested as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2.5 Clips for bails (5-gallon and 10-gallon capacity). Bail clips shall be made from sheet steel specified in 3.3.1.1. Clips shall be formed to fit corrugations or debossed flat area on can body. Clips shall be centered over body seams and riveted to the body, as shown on figure 1; or at the option of the supplier, welded with a minimum of two spot welds located as specified for riveting. Clips shall not become loose or pull away when tested as specified in 4.4.4.

3.4.2.5.1 Bails. Bails of the design shown on figure 1 shall be formed from steel wire specified in 3.3.1.3, shaped so as to lock the cover in place when the bail is in carrying position.

3.4.3 Covers. Covers shall be formed from one piece of sheet steel specified in 3.3.1.1, and stiffened by means of concentric offsets to develop a concave shape. Flanges shall have a beaded edge. As an alternate to the straight sided flange, an offset beaded flange may be used which permits nesting of covers without jamming.

3.4.3.1 Clips for cover handles. The clips for cover handles shall be formed from sheet steel specified in 3.3.1.1, and be riveted or spot welded to the cover with two rivets, 4 pound size, or welded with a minimum of two spot welds.

3.4.3.2 Cover handles. The cover handles shall be formed from steel wire specified in 3.3.1.3, and shall be of the dimensions and shape specified on figures 1 and 2.

3.5 Finish. After being completely fabricated the entire can or cover, excluding bails and handles fabricated from zinc coated steel wire, shall be cleaned and loose scale or rust removed, prior to being completely coated with zinc by the hot dip process. The weight of the zinc coating shall be not less than 2 ounces per square foot when tested as specified in 4.4.2.1 or the thickness of the zinc coating shall be not less than 0.002 inch (one face) when tested as specified in 4.4.2.2. The coating shall adhere and not peel when tested as specified in 4.4.3.

3.6 Marking for identification. All can covers and can bottoms shall be legibly and permanently embossed with the manufacturer's identification or trademark and the can capacity in characters approximately 5/8 inch high conforming to industry practice.

3.7 Workmanship. The can shall be clean, sound, and free from cracks, burned or reduced areas, flux, scale, spatter or flash. All edges of the bands shall be duburred or rounded. The finish shall be free from lumps, blisters, grit, uncoated areas, dross, flux, black or acid spots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for defects in table I and dimensions specified. The preproduction sample shall be tested in accordance with 4.4.1 through 4.4.6.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 In-process inspection.

4.3.2.1 In-process examination. Examination shall be made during the manufacturing process for the cleaning and removal of loose scale and rust prior to zinc coating (see 3.5). Whenever nonconformance is noted correction shall be made to the affected items and the process.

4.3.3 In-process zinc-coat testing. The zinc-coat weight testing shall be performed in accordance with 4.4.2.1. Three test specimens, 2-1/4 inches square minimum, made from the same material as the can body and cover, and prepared as specified in 3.5. These test specimens shall be prepared on each lot or batch of hot dip process. Failure to meet the zinc-coat weight requirements of 3.5.shall be cause for rejection of the process. Alternatively, the zinc coating of the end item may be tested as specified in 4.4.2.2.

4.3.4 End item inspection. The lot shall be all cans of one capacity and cover or cans or covers only, as applicable, offered for inspection at one time. The sample unit shall be one completely finished can and cover or can or cover only.

4.3.4.1 Visual examination. The end item shall be examined for defects in table I. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examination	Defect	Classification Major	Minor
Finish	Not zinc coated.	101	
	Area of no coating.	102	
	Contains lumps, blisters, gritty areas, black spots, dross and flux.		201
Design, construction and workmanship	Not as specified.	103	
	Any part wrong type.		202
	Any part dented (except tested area), buckled, warped, or bent out of shape.		203
	Any part missing (except rivets) or in wrong location.	104	
	Any part broken, fractured, or cracked.	105	
	Sharp projection, tear, or edge	106	
	Can lopsided.		204
	Can not rigid, or shape does not permit nesting (i.e., each size complete with covers within the next larger size).	107	
	Can does not nest evenly, or does not rest on body handles when partially nested without covers (size 16-gallon and larger only).	108	
Welding	Weld omitted; not fused, broken, nor burnt through.	109	
	Weld pitted or flash or spatter not removed.		205
Bodies	Not two equal pieces of steel.		206
	Two horizontal corrugations missing near top.		207
	Quantity of vertical corrugations not as shown on applicable figure.		208
	Horizontal corrugation at top edge of bottom band missing.		209
	Side joints not a grooved seam.		210
	Band at top or bottom missing.	110	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examination	Defect	Classification Major	Minor
Bodies (cont'd)	Top and bottom band(s) assembly not as shown on applicable figure.	111	
	Hole or open seam.	112	
Bottoms	Not one piece of steel.	113	
	Corrugations or concaving as applicable, missing.		211
	Edge not turned down over bottom band.	114	
	Edge not seamed with the body.	115	
	Hole or open seam.	116	
Covers	Not one piece of steel.		212
	Concentric offsets missing.		213
	Not concave shape.	117	
	Do not fit can, as applicable.	118	
	Will not nest.	119	
	Beaded edge missing.		214
Clips	Cover handle clips not as shown on figures.		215
	One spot weld missing.	120	
	One rivet missing.	121	
Handle	Cover handle not as shown on figures.		216
Bail clips 5- and 10-gallon cans	Not formed to fit body.		217
	One rivet missing applicable).	122	
	One spot weld missing (when applicable).	123	
	Not centered over body seams.	124	
Body clips, 16- 24-, and 32-gallon cans	Not formed to fit body.		218
	One spot weld missing (when applicable).	125	
	Not centered over body seams.	126	
Bails 5- and 10- gallon cans	Not as specified.		218
	Do not lock cover in place when in carrying position.		219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examination	Defect	Classification Major	Minor
Body handles 16-, 24-, and 32-gallon cans.	Not drop type.	127	
Rivets	Any rivet missing, not peened or head broken off.	128	
	Rivets on top and bottom band not equally spaced.		220
Identification marking	Missing, illegible, incomplete, incorrect, wrong size, or location.		221
	Not embossed.		222

4.3.5 Examination for defects in dimensions. Examination shall be made of the cans and covers for defects in dimensions. Any dimension that is not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.6 End item testing. Testing of the completely finished cans and covers, applicable (see 4.3.3) shall be performed in accordance with table II for the characteristics shown therein. Any nonconformance shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. End item testing of cans and covers

Characteristic	Requirement paragraph	Test procedure	Requirement applicable to: Indiv Unit	Lot average	Sample unit	Inspection
Leakage	3.4	4.4.1	X	---	One can	Pass or fail
Thickness of zinc coating	3.5	4.4.2.2	X	---	One can or cover	Pass or fail
Coating adhesion	3.5	4.4.3	X	---	One can or cover	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. End item testing of cans and covers (con.)

Characteristic	Requirement paragraph	Test procedure	Requirement applicable to: Indiv unit	Requirement applicable to: Lot average	Sample unit	Inspection
Welding:						
Bail clips (5- and 10-gallon)	3.2.5	4.4.4	X	---	One can	Pass or fail
Body handle clips	3.4.2.4	4.4.4	X	---	One can	Pass or fail
Drop	3.4	4.4.5	X	---	One can	Pass or fail
Capacity	3.4.1	4.4.6	X	---	One can	Pass or fail

4.3.7 Examination of preparation for delivery requirements. An examination shall be made to determine that packing and marking requirements of section 5 are complied with. Defects shall be scored in accordance with table III. The sample unit shall be one shipping crate or container fully prepared for delivery, with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE III. Examination of packing and marking

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Inadequate application of components, such as; incomplete blocking, cushioning, closure of container flaps, when applicable, inadequate stapling and strapping. Handles, when applicable, not secured. Not palletized in accordance with MIL-STD-147.
Content	More or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4 Tests.

4.4.1 Leakage. Each can to be tested shall be filled with water within 1/2 inch of the top and allowed to stand for 24 hours to determine compliance with 3.4.

4.4.2 Zinc coating.

4.4.2.1 Weight. The weight of zinc coating shall be determined to nearest 0.01 ounce in accordance with Test Method 512 of Federal Test Method Standard No. 151 (see 4.3.6), to determine compliance with 3.5.

4.4.2.2 Thickness. The thickness of the zinc coating shall be checked to the nearest 0.0001 with a magnetic type gage in accordance with industry's standard commercial practice. Readings shall be taken on the inside surface of one can or cover and on the outside surface of the next can or cover tested, alternating throughout the testing of the sample lot size.

4.4.3 Adhesion of zinc coating. From a height of two feet, drop a one-half pound weight on each can selected for test. Results shall then be examined to determine compliance with 3.5.

4.4.4 Bail clips and handle clips weld tests. The can shall be loaded with a weight equivalent to two times the weight of the can's capacity in water and lifted by the bail or handles as applicable, clear of the floor and allowed to remain suspended for 30 minutes. The clips shall be examined to determine compliance with 3.4.2.4, or 3.4.2.5, as applicable.

4.4.5 Drop test. The finished can shall be inverted, the bail secured and dropped from a height of 40 inches on each quadrent of the top (4 drops) onto a concrete floor or steel plate. The can shall then be loaded with wet sand or other dead weight material and dropped from a height of 40 inches onto each quadrent of the bottom onto a concrete floor or steel plate. The weight of the load shall be 6-1/2, 13 21, 31-1/2 and 42 pounds for can capacities of 5- 10- 16- 24- and 32-gallons, respectively. The can shall then be filled with water to within 1/2 inch of the top and allowed to stand for 24 hours to determine compliance with 3.4.

4.4.6 Capacity. All cans shall be filled with water and measured to determine compliance with 3.4.1

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Sets. When cans of different capacities are to be prepared for shipments in sets, they shall be nested one within the other, complete with covers. The sets of cans shall then be packed in palletized unit loads, in accordance with MIL-STD-147, for load type IV with separators as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.1.2 Identical capacities. Cans of identical capacities shall be packed in palletized unit loads in accordance with MIL-STD-147 for load type V with blocking as required.

5.1.1.3 Can covers.

5.1.1.3.1 Nesting type. Twelve nesting type can covers for one capacity can only shall be nested in one stack and single strapped, as illustrated in figure 4. Two single strapped stacks of twelve nesting type can covers (24 total), of one kind shall be packed in a nailed, wood, open-type crate constructed to fit the contents in a compact manner in accordance with figure 4, or a fiberboard shipping container conforming to style FOL, V2s of PPP-B-636. Closure and reinforcing with strapping or tape banding shall be in accordance with the appendix of the container specification.

5.1.1.3.2 Nonnesting type. Twelve nonnesting type can covers of one kind only, shall be stacked so that the covers are partially nested. Covers shall be staggered in nest to form a compact cylindrical stack and the stack double strapped as illustrated in figure 4. Two double strapped stacks of 12 nonnesting type can covers (24 total) of one kind, shall be packed in a nailed, wood, open-type crate constructed to fit the contents in a compact manner in accordance with figure 4, or a fiberboard shipping container conforming to style FOL, V2s of PPP-B-636. Closure and reinforcing of the strapping or tape banding shall be in accordance with the appendix of the container specification.

5.1.2 Level B.

5.1.2.1 Sets. When cans of different capacities are to be prepared for shipments in sets, they shall be nested one within the other, complete with covers. The cover of the outer can shall be secured in place by a minimum of 0.080 inch diameter annealed steel wire conforming to QQ-W-461. The wire shall be passed through the opening of one handle retainer between the side wall of the can and the handle, carrying the two ends of wire up over the cover, through the cover handle, down through the other handle retainer on the opposite side of the can, twisting the two ends of the wire tightly with a pair of pliers to remove all slack, and turning the twist thus formed, down parallel to the wire.

5.1.2.2 Identical capacity. When cans of identical capacity are to be prepared for shipment, they shall be nested one within the other in quantity specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Count relation to capacity

Capacity (gallons)	Cans per bundle
5	10
10	6
16	4
24	3
32	3

5.1.2.2.1 Five- and ten-gallon cans. Bundles of 5- and 10-gallon cans shall have the ears and bails in alignment and shall be securely tied with two minimum 0.080 inch diameter annealed steel wires, conforming to QQ-W-461, fastened on opposite sides. Each wire shall pass through one ear of the bottom can, through one ear of the top can. The two ends of the wire twisted tightly with a pair of pliers so that all slack is removed from the wire. The twist shall be turned in behind the rim of one can so that it is not left in an exposed position where it might injure anyone handling the bundle.

5.1.2.2.2 Sixteen-gallon and larger cans. Bundles of 16-, 24-, and 32-gallon cans shall have the handles in alignment and shall be securely tied with two minimum 0.080 inch diameter annealed steel wires conforming to QQ-W-461, fastened on opposite sides. Each wire shall pass through the opening of the handle retainer of the bottom can between the side wall of the can and handle and through the opening of the handle retainer of the top can in the same manner. The ends of the wire shall be twisted tightly together with a pair of pliers to remove all slack and the twist thus formed, turned down parallel to the wire.

5.1.2.3 Can covers. Can covers shall be packed as specified in 5.1.1.3, except the shipping containers shall conform to style FOL, type CF or SF, class domestic, variety optional grade minimum 275 of PPP-B-636.

5.1.2.3.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

5.1.3 Level C. Cans and covers shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.1.3.1 Civil agencies. When specified (see 6.2), the subject commodity shall be packed for shipment as specified in 5.1.2, as applicable except that can covers may be shipped either in banded bundles without over packing in wood crates, or in fiberboard shipping containers of not less than grade

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

200, conforming to PPP-B-636. Covers for 5-gallon cans shall be bundled or packed in cartons, 10 covers per bundle or box. All other capacity can covers shall be bundled or packed in boxes with 12 covers per bundle or box.

5.2 Marking.

5.2.1 Civil agencies. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military requirements. In addition to any special marking requirement required by the contract or order, shipment shall be marked in accordance with MIL-STD-129.

6. NOTES.

6.1 Intended use. The cans covered by this specification are intended to be used as containers for garbage and rubbish. The 32-gallon capacity can may be used to heat potable water for food service utensil washing and sanitizing under emergency or field conditions.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) When cans are required with or without covers, or covers only are required (see 1.1).
(c) Capacity of can required (see 1.2.1).
(d) Cover required (see 1.2.2).
(e) First article. When a preproduction sample is required (see 3.1).
(f) Selection of applicable level of packing required (see 5.1).
(g) Whether alternate civil agency packing is required (see 5.1.3.1).
(h) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.1.2.3.1).


MILITARY CUSTODIANS:
Army - GL
Navy - YD
Air Force - 84

Review activities:
Army - MD
Navy - YD
Air Force - 84


User activities:
Army - CE, SM

Preparing activity:
Army - GL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

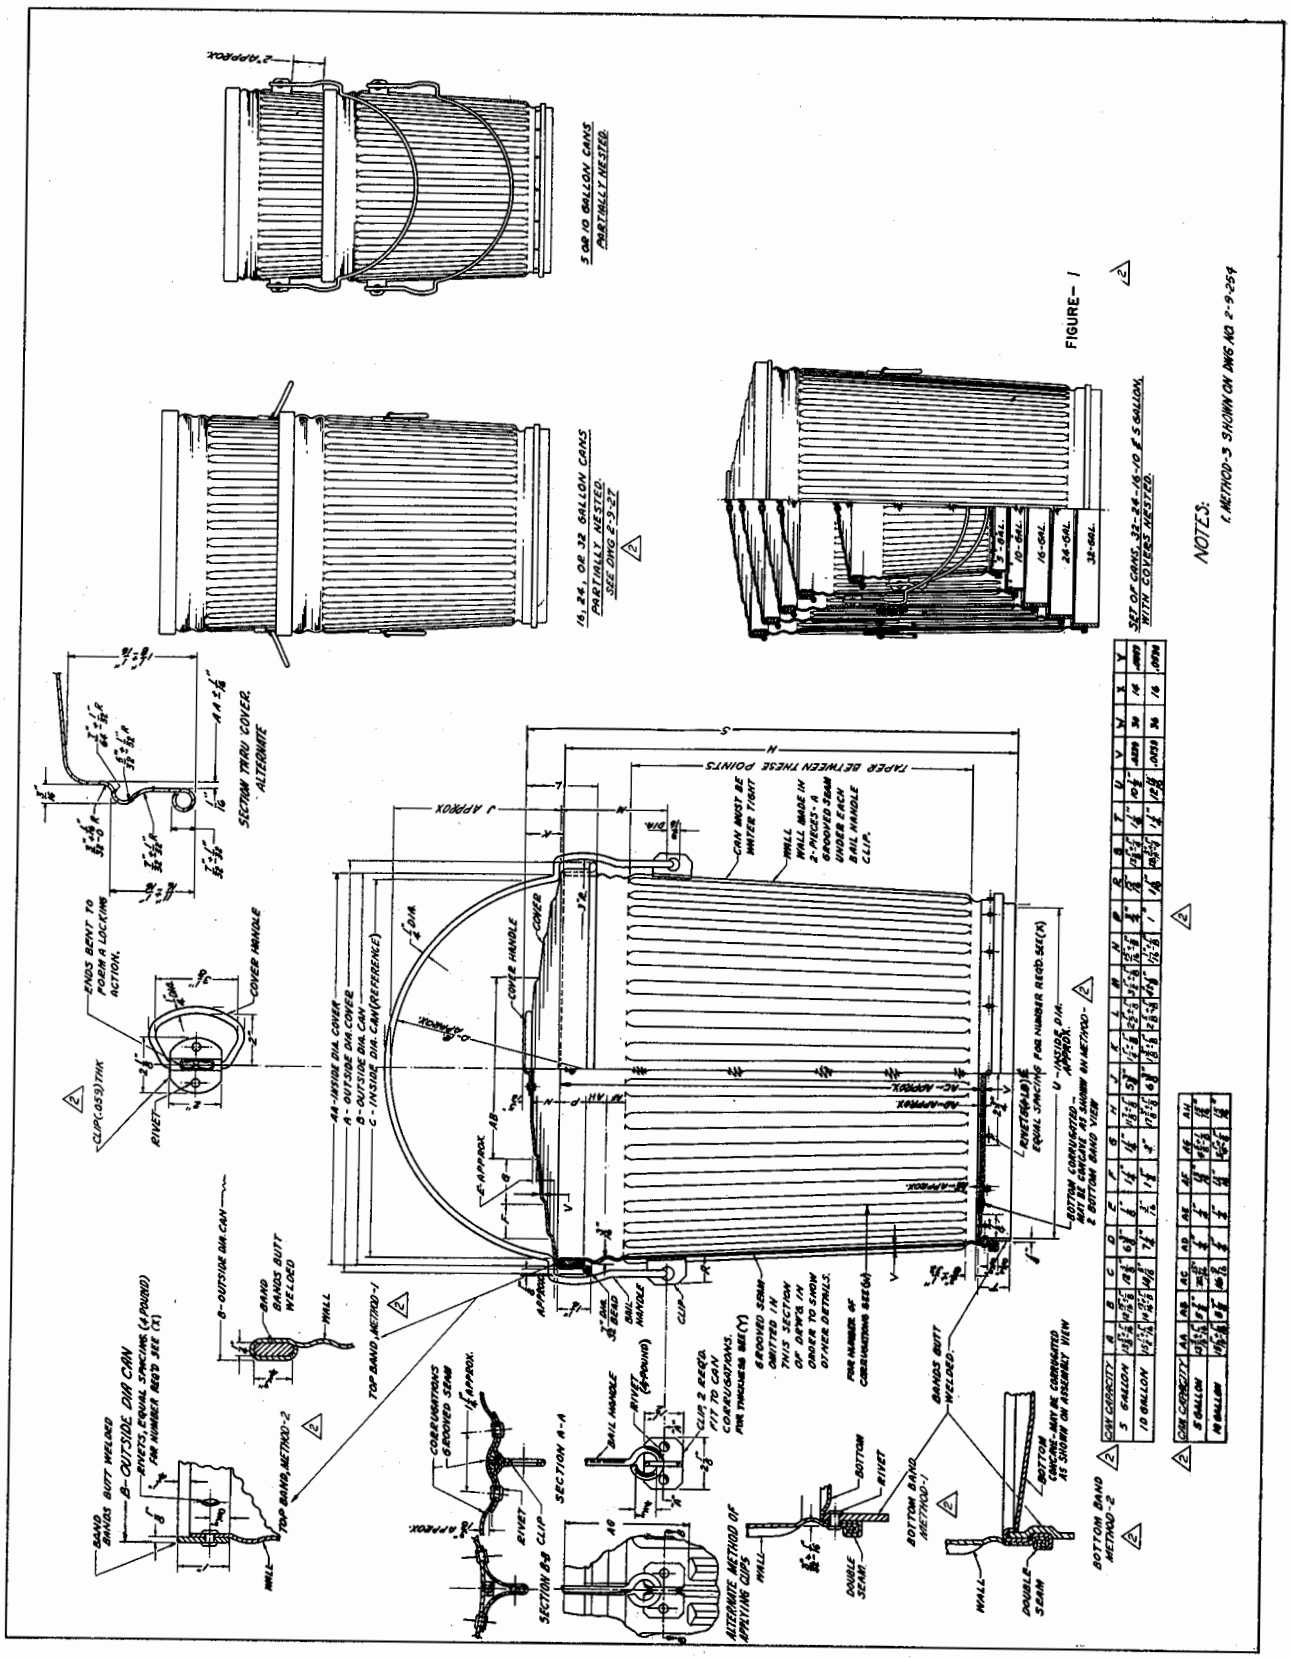

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

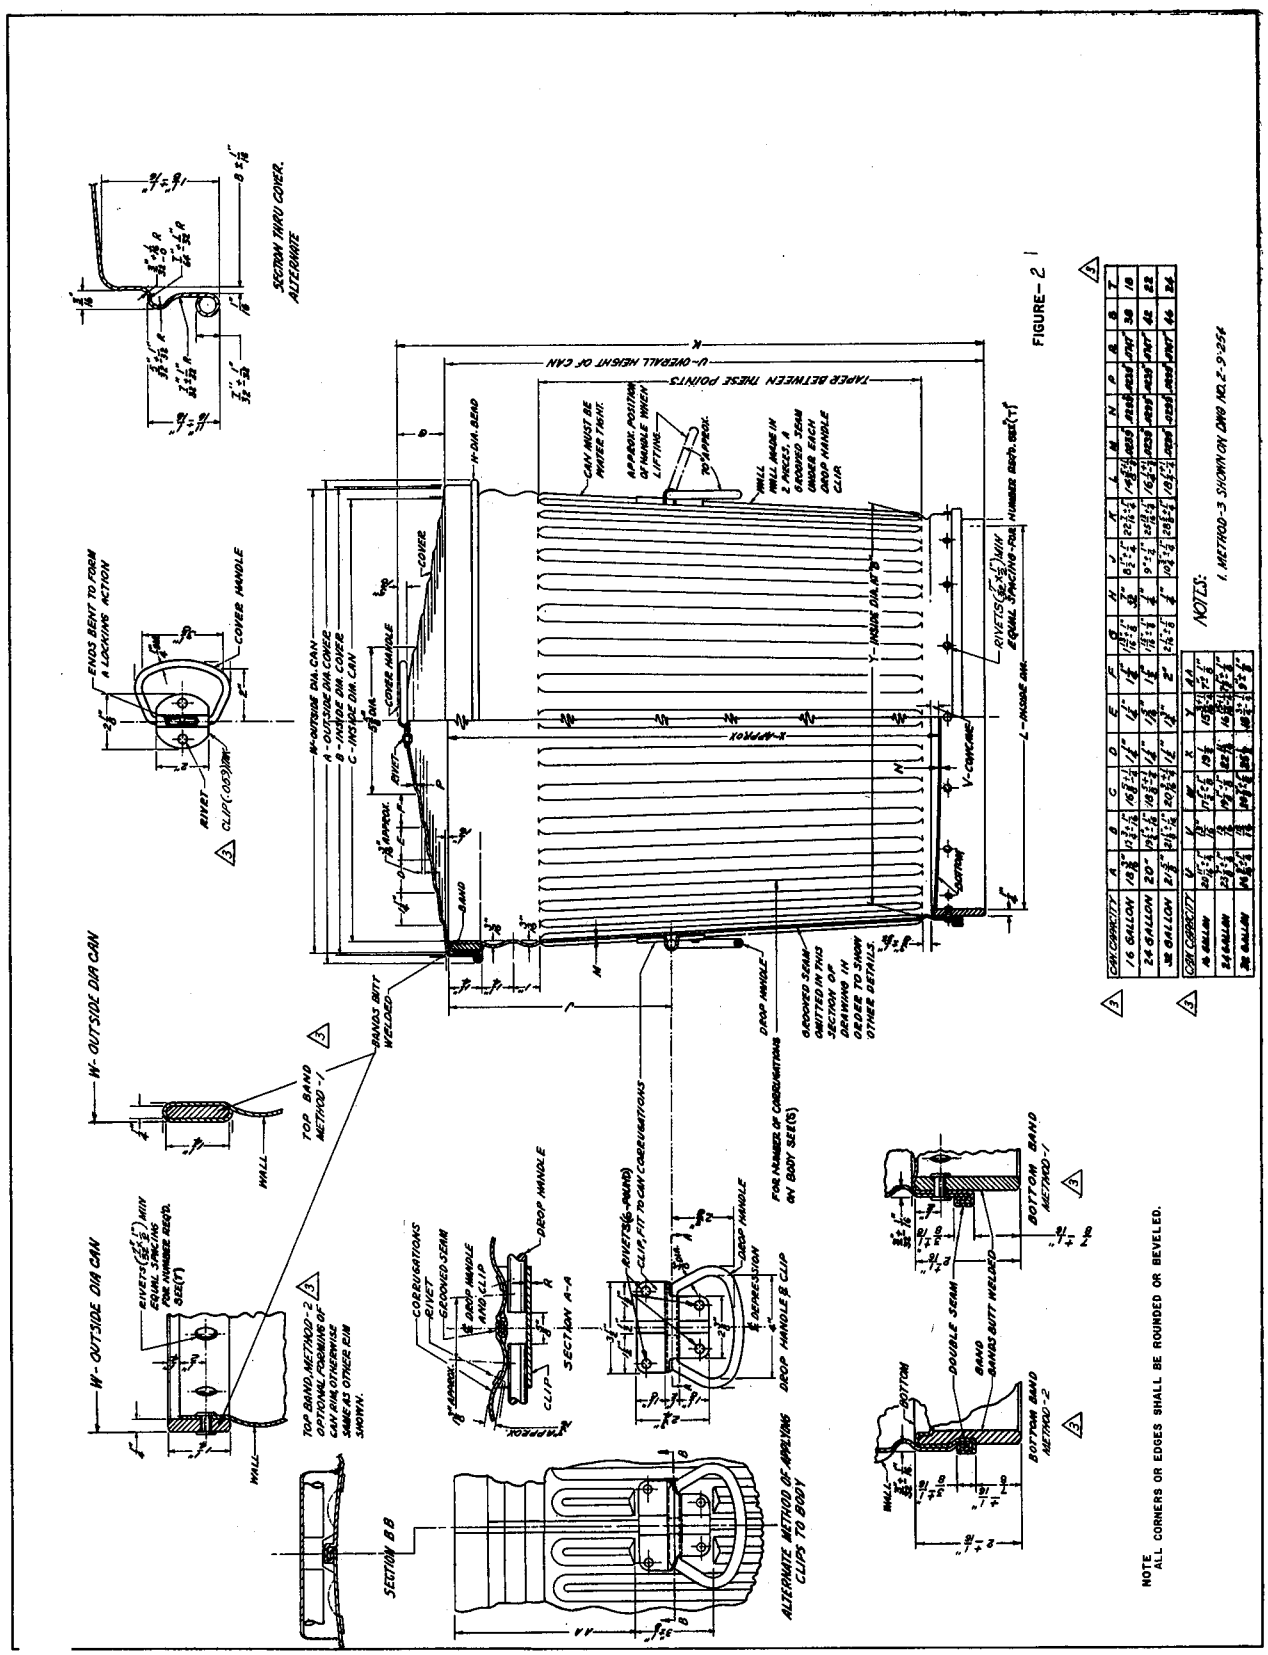

CAN CAPACITY	A	B	C	D	E	F	G	H	J	K	L	M	N	P	S	T
16 GALLON	18⅜"	12⅛"	10⅜"	¼"	¼"	1⅝"	⅛"	⅝"	6½"	22⅛"	15/16"	.1875	.1850	.1850	30	10
24 GALLON	20"	15⅛"	10⅜"	¼"	¼"	1⅝"	⅛"	⅝"	9½"	22⅛"	15/16"	.1875	.1850	.1850	42	22
32 GALLON	21⅝"	18⅛"	10⅜"	¼"	¼"	1⅝"	⅛"	⅝"	10½"	28⅛"	15/16"	.1875	.1850	.1850	46	34

CAN CAPACITY	U	K	X	AA
16 GALLON	25½"	26⅛"	10⅜"	2⅝"
24 GALLON	27½"	28⅛"	10⅜"	2⅝"
32 GALLON	29½"	30⅛"	10⅜"	2⅝"

NOTES:
1. METHOD-3 SHOWN ON DWG NO. 2-9-254

FIGURE-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

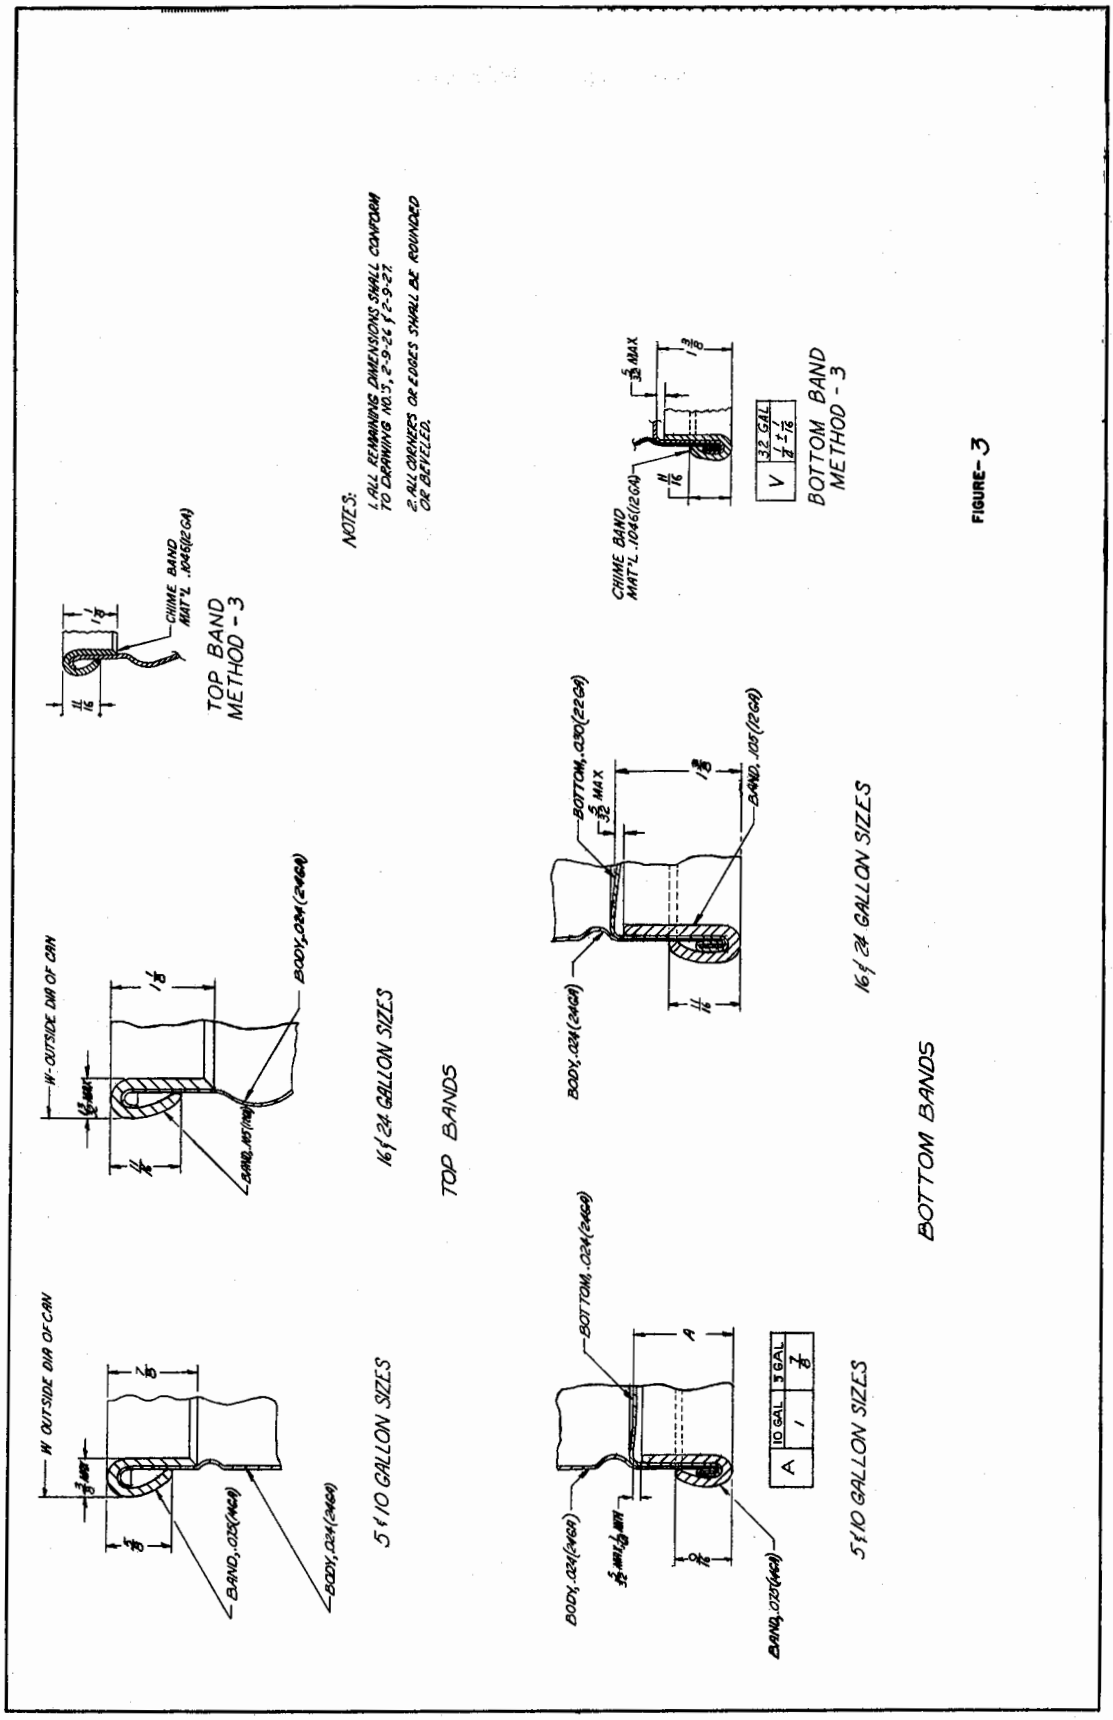


FIGURE- 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

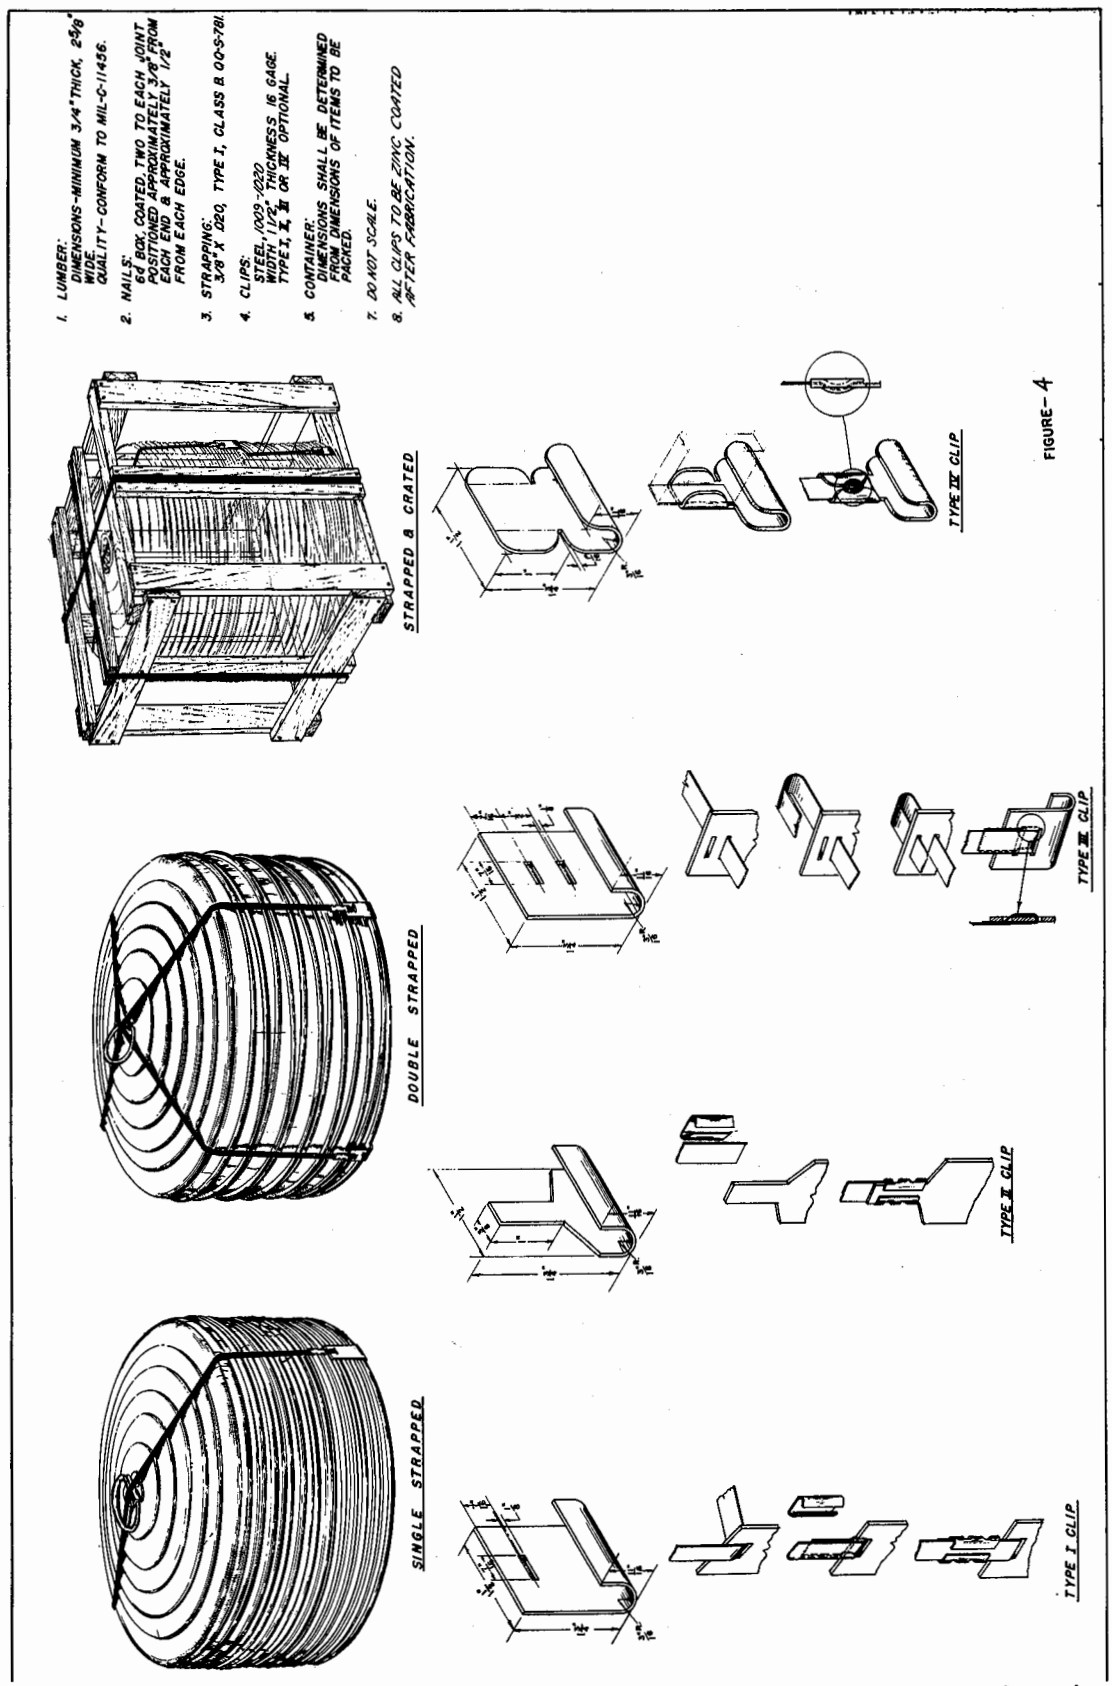


FIGURE-4

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION Cans, Ash and Garbage, Corrugated, Taper-Side, Zinc-Coated; and Covers RR-C-82D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.