RR-C-82D
INT. AMENDMENT-1 (Army-GL)
28 October 1969

INTERIM AMENDMENT

TO

FEDERAL SPECIFICATION

CANS, ASH AND GARBAGE, CORRUGATED, TAPER-SIDE,

ZINC-COATED: AND COVERS

This Interim Amendment was developed by the U.S. Army Natick Laboratories (GL), Natick, Massachusetts 01760, based on currently available technical information. It is recommended that Federal Agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized Federal Agencies to use this Interim Amendment as a valid exception to Federal Specification RR-C-82D, dated January 24, 1969.

PAGE 1

Paragraph 1.2, line 1. Delete "nominal".

PAGES 2 and 3

Paragraph 2.2, lines 5 through 12. Delete and substitute the following:

"NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CALSSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Boulevard, Chicago, Illinois 60606.)

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

American Society for Testing and Materials (ASTM) Publication:

A90 - Method of Test for Weight of Coating on Zinc-Coated (Galvanized) Iron or Steel Articles

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups, and using Federal agencies.)"

PAGE 3

Paragraph 3.3.1.1. Delete and substitute the following:

"3.3.1.1 Sheet or strip, bare (black) or zinc-coated.

3.3.1.1.1 Bare. Bare sheet or strip carbon steel shall conform to hot-rolled or cold-rolled, commercial quality of QQ-S-698."

Add the following new paragraph:

"3.3.1.1.2 Zinc-coated. Zinc-coated sheet or strip carbon steel shall conform to 3.3.1.1.1 and shall have a continuous zinc coating not less than 2 ounces per square foot total deposit (both sides), or not less than 0.002-inch each face when tested as specified in 4.4.2."

Paragraph 3.3.2. Delete and substitute the following:

"3.3.2 Rivets, steel, flathead tinners, bare (black) or zinc-coat finished.

3.3.2.1 Bare. The bare steel rivets shall be commercial type shown on figures 1 and 2.

3.3.2.2 Zinc-coated. The zinc-coated steel rivet shall be as specified in 3.3.2.1 with a coating conforming to type II, class 2 of QQ-Z-325."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PAGE 4

Paragraph 3.4.1 Delete in its entirety.

Paragraph 3.4.2.4, line 4. Delete "bearing" and substitute "stops".

Line 8 Delete "straps" and substitute "stop".

Line 8, after "deformed". Delete "more than 5 degrees when tested as specified in 4.4.4", and substitute "allowing the handles to be raised more than 5 degrees above the original approximate 70 degrees from the body."

PAGE 5

Paragraph 3.4.3, lines 2 and 3. Delete "to develop a concave shape" and substitute "(see figures 1 and 2)."

Line 3, after "shall". Insert "be straight sided and".

Paragraph 3.5. Delete and substitute the following:

"3.5 Finish.

3.5.1 Bare (black). The cans and covers fabricated from steel sheet or strip specified in 3.3.1.1.1, excluding the prefinished wire bails or handles, shall be cleaned and loose scale or rust removed, prior to being completely coated with zinc by the hot dip process. The weight of the coating shall be not less than 2 ounces per square foot when tested as specified in 4.4.2.1 or the thickness of the coating shall be not less than 0.002 inch (one surface) when tested as specified in 4.4.2.2. The coating shall adhere and not peel when tested as specified in 4.4.3.

3.5.2 Zinc-coated. The completed can and cover shall have no surface area of no zinc coating or damaged finish (excluding cut edges). The completed cans and covers fabricated from pregalvanized steel sheet or strip specified in 3.3.1.1.1, with bails or handles secured with rivets specified in 3.3.2.2, requires no further finish."

PAGE 6

Paragraph 4.3.3, line 1. Delete "The zinc-coat weight" and substitute "When the supplier elects to test the zinc coating by weighing, the".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PAGE 6 (cont'd)

Line 6 Delete "of the process" and substitute "of the lot and the process shall be adjusted."

Lines 6 and 7 Delete the last sentence and substitute "When the supplier elects to test the zinc coating by the thickness test, the test shall be performed on the end item as specified in 4.4.2.2."

PAGE 7

Table I, defect No. 109, under defect column, line 2. Delete "nor" and substitute "or".

PAGE 8

Table I, continued, under the "defect" column for defect Nos. 120, 121, 122, and 123, after "One". Insert "or more", and make "spot" and "rivet" plural.

Defect 122, line 1, after "missing". Add "(when".

Defect 125, under the "defect" column. Delete "One spot weld missing (when applicable)" and substitute "One or more spot welds or rivets missing, as applicable."

PAGE 9

Table I, continued, defect 220, under defect column, after "spaced". Add "or not type specified".

PAGE 10

Table II. Delete "Capacity" and all references thereto.

PAGE 11

Paragraph 4.4.4, line 4, after "clips". Insert "and handle stop".

Paragraph 4.4.5, line 1, after "bail". Insert ", when furnished,".

Paragraph 4.4.6 Delete in its entirety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Figure 4. Delete and substitute new figure 4.

MILITARY CUSTODIAN:


Army - GL

Preparing activity:


Army - GL

Project No. 7240-A146


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

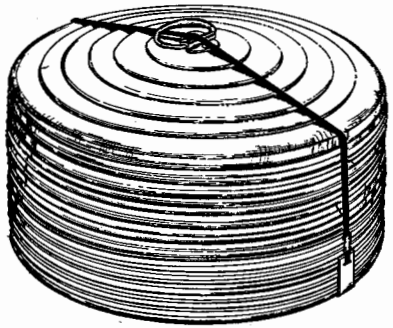

SINGLE STRAPPED

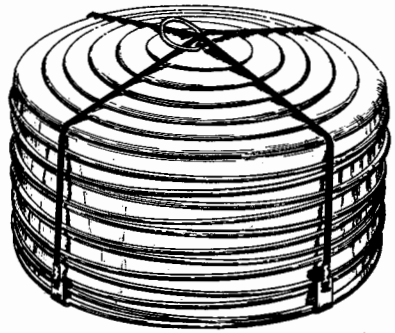



DOUBLE STRAPPED

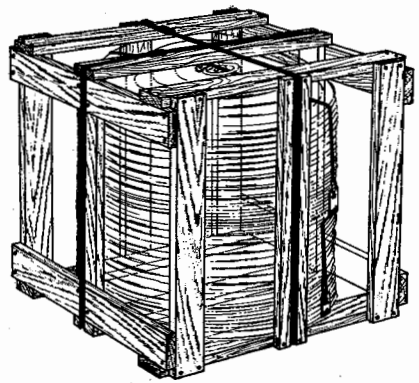


STRAPPED & CRATED

1. LUMBER:
   DIMENSIONS - MINIMUM 3/4" THICK, 2 5/8" WIDE.
   QUALITY - CONFORM TO PPP-C-650
2. NAILS:
   6d BOX, COATED, TWO TO EACH JOINT POSITIONED APPROXIMATELY 3/8" FROM EACH END & APPROXIMATELY 1/2" FROM EACH EDGE.
3. STRAPPING:
   3/8" X .020, TYPE I, CLASS B. QQ-S-781
4. CLIPS:
   STEEL, LOW CARBON, SHEET OR STRIP, HOT OR COLD ROLLED, COMMERCIAL QUALITY, WIDTH 1 1/2"; THICKNESS 16 GAGE. TYPE I, II, III OR IV OPTIONAL
5. CONTAINER:
   DIMENSIONS SHALL BE DETERMINED FROM DIMENSIONS OF ITEMS TO BE PACKED.
7. DO NOT SCALE.
8. ALL CLIPS SHALL BE ZINC COATED.







TYPE I CLIP







TYPE II CLIP



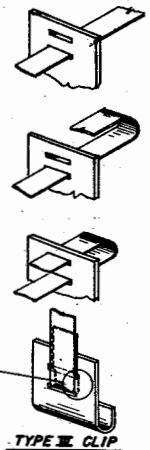

TYPE III CLIP





TYPE IV CLIP

FIGURE - 4

CANS, ASH & GARBAGE, CORRUGATED, TAPER-SIDE, ZINC COATED; AND COVERS; CONTAINER FOR COVERS FOR - [illegible] SHIPMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.