3. REQUIREMENTS


3.1 Material.

3.1.1 *Corrosion-resisting steel.*—Jars shall be constructed of corrosion-resisting steel conforming to class 1 or 2 of Federal Specification QQ–S–766, and shall meet the chemical requirements specified therein when tested as specified in 4.3.1.

3.2 Construction.—Construction shall conform to the requirements specified herein and as shown on figure 1. Body and base of jar each shall be formed of corrosion-resisting steel not less than 0.031 inch (No. 22, United States Standard gage), which shall not be reduced below 0.023-inch thickness at any point in the finished jar. Base shall be oversized, and shall be weighted with a suitable noncorrosive metal filler to produce a stable unit. Bead shall be tightly rolled or otherwise closed to prevent the accumulation of dirt, grease, or other foreign matter.

3.3 Spot welding.—Spot welding shall be thorough, sound, and free from pits and flashes. The base shall be joined to the jar with not less than four spot welds in the location shown on figure 1.

3.4 Finish.—Finish shall be smooth on all surfaces and edges, and shall be free from rough grind marks, trimming marks, pits, scratches, die marks, and other defects. The final finish shall be obtained with a grind of No. 200 emery or its equivalent, and shall present a uniformly finished surface substantially similar to No. 4 commercial finish. All surfaces shall be free from discoloration, stains, or pits. The inner surface only may be given an electropolished finish. The thickness of the sheet forming the forceps jar

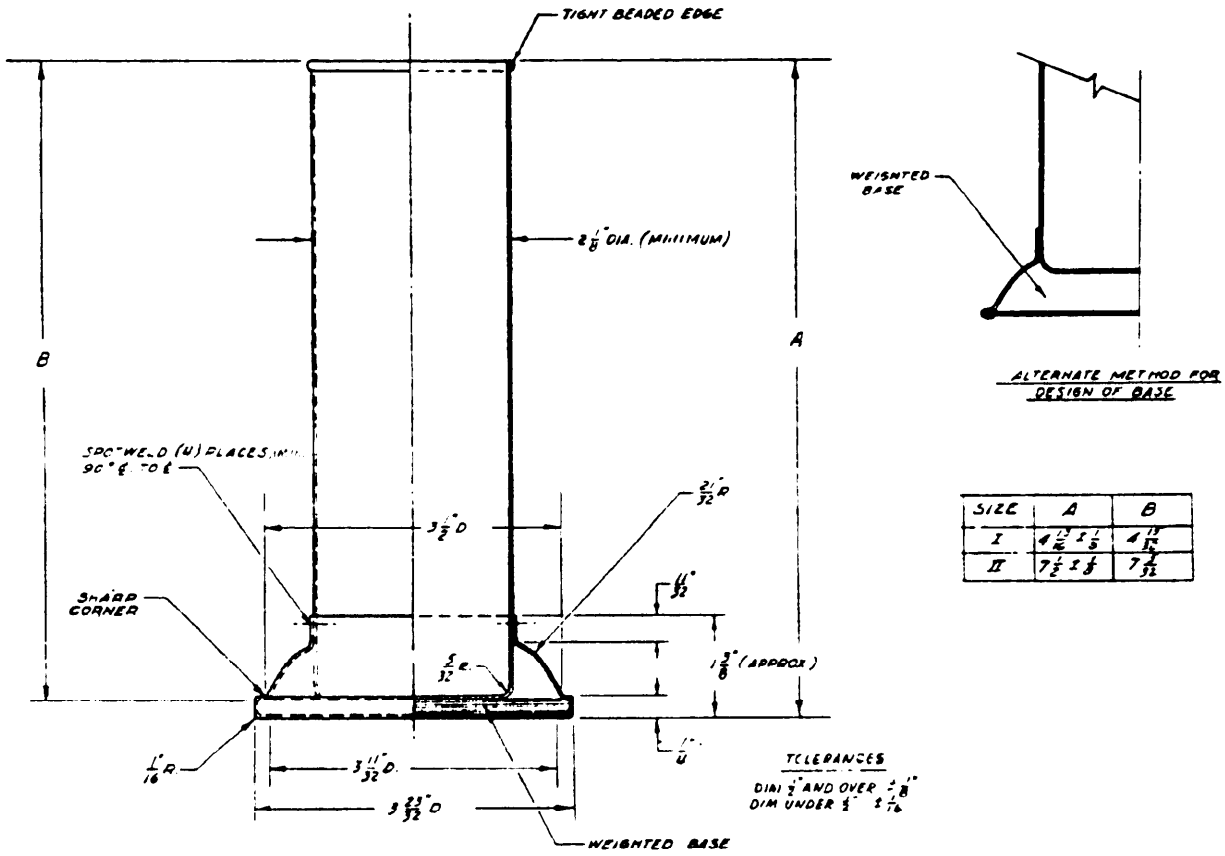

SIZE	A	B
I		
II		

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

6.4 Transportation description.—Transportation description applicable to these items is:

Sheet steel ware, not otherwise indexed by name.
(Specify nested or not nested.)
Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Sheet steel articles, not otherwise indexed.
(Specify nested or not nested.)
Motor volume minimum weight 20,000 pounds.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—M
Navy—Md
Air Force.

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.