RR-P-58E
June 2, 1978
SUPERSEDING
Fed. Spec. RR-P-58D
May 6, 1970

FEDERAL SPECIFICATION

PANS, BREAD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an individual bread pan and bread pans assembled in sets of 3, 4, and 5 pans and treated with glazing compound.

1.2 Classification. Bread pans and bread pan sets shall be of the following styles and sizes as specified (see 6.2). Sizes shown are top overall length by width by depth of the pan or pan sets, as applicable.

Style 1 - Individual pan

Size 1 - 12-3/4 x 4-5/8 x 2-7/8 inches (324 x 117 x 73 mm)

Style 2 - Three-pan set

Size 1 - 15-3/4 x 17 x 3-1/2 inches (400 x 432 x 89 mm)
Size 2 - 21-1/2 x 12-1/8 x 2-1/2 inches (546 x 308 x 64 mm)
Hearth pan set

Style 3 - Four-pan sets

Size 2 - 21-1/8 x 14-1/2 x 3-1/2 inches (537 x 368 x 89 mm)
Size 3 - 21-5/8 x 10-3/8 x 2-3/4 inches (549 x 264 x 70 mm)

Style 4 - Five-pan sets

Size 2 - 28 x 11 x 3-1/2 inches (711 x 279 x 89 mm)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-T-425 - Tin Plate (Hot Dip and Electrolytic).
QQ-W-461 - Wire, Steel, Carbon, (Round, Bare, and Coated).

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PPP-B-576	-	Box, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-591	-	Boxes, Shipping, Fiberboard, Wood-Cleated.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Boxes, Shipping, Fiberboard.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-S-4174	-	Steel Sheet and Strip, Flat, Aluminum Coated, Low Carbon.
MIL-L-10547	-	Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.
MIL-G-51145	-	Glazing Compound, Baking Pan.

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

(Copies of specifications, standards and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The bread pans and bread pan sets delivered under this specification shall be the manufacturer's commercial current standard product, except for any changes necessary to comply with specification requirements.

3.2 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for his bread pans and bread pan sets, provided the completed items comply with all provisions of this specification. Unless otherwise specified herein, commercial tolerances shall apply to material thicknesses and diameters. For information on recycled material (see 6.4).

3.2.1 Wire, steel, carbon. Carbon steel wire shall conform to the requirements for steel number 1010, 1015, or 1020, finish 3 of QQ-W-461.

3.2.2 Tin plate. Tin plate shall conform to QQ-T-425 and shall be type I, grade 3, class A bright finish; type I, grade 4, class 25, dull matte or bright finish; or type I, grade 4, class 100.

3.2.3 Aluminized steel, sheet or strip. Aluminized steel sheet or strip shall conform to type I, grade A or B of MIL-S-4174.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.2.4 Glazing compound. Glazing compound shall conform to MIL-G-51145.

3.3 Design and construction. The bread pans and bread pan sets shall be designed and constructed as specified herein and as shown on figure 1. Figure 1 is for illustrative purposes only except for dimensional and material requirements shown thereon and is not intended to preclude procurement of bread pans or bread pan sets otherwise meeting all specification requirements. The bread pans and bread pan sets except for the hearth pan sets, shall be fabricated of aluminum coated steel specified in 3.2.3 and the wire specified in 3.2.1. The hearth pan sets shall be fabricated of the tin plate specified in 3.2.2 and the wire specified in 3.2.1. All pan sets shall have strapping fabricated of the same material as the pans, completely encircling the pan set just below the wire bead. Strapping shall have top and bottom rounded reinforcing channels or at the option of the manufacturer may be flat. Flat strapping shall be not less than 0.061 inch (1.5 mm) thick and not less than 1-1/2 inches (38 mm) wide. Reinforced strapping shall not be less than 0.048 inch (1.2 mm) thick and not less than 1-3/8 inches (35 mm) wide. Strapping shall have embossed or extruded offsets or other suitable means to prevent the sets of bread pans from shifting when nested. All bread pans in sets, except the hearth pan set, shall be permanently joined to the strapping at the pan ends in accordance with the manufacturer's standard practice.

3.3.1 Dimensions. The bread pans and the bread pan sets shall conform to the dimensions specified herein, on figure 1, and as specified in tables I and II. Column designation letters in the tables correspond to the letter designation of figure 1.

TABLE I. Dimensions for style 1 in inches (mm)

B Top outside length	C Inside slope	D Bottom outside width	E Bottom outside length	F Top inside length	G Top inside width	H Top outside width
All tolerances ± 1/16 (1.6)						
12-3/4 (324)	2-7/8 (73)	3-3/4 (95)	11-3/4 (298)	12-1/4 (311)	4-1/4 (108)	4-5/8 (117)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions - style 2, 3, and 4 sets - inches (mm)

Style	Size	Number of pans in set	A Top outside length of set ± 1/8 (3.2)	B Top outside width of set ± 1/8 (3.2)	C Inside slope depth of pan ± 1/16 (1.6)	D Bottom outside width of pan ± 1/16 (1.6)	E Bottom outside length of pan ± 1/16 (1.6)	F Top inside length of pan ± 1/16 (1.6)	G Top inside width of pan ± 1/16 (1.6)	J Top spacing between pans ± 1/4 (6.4)
2	1	3	15-3/4 (400)	17 (432)	3-1/2 (89)	4 (102)	16 (406)	16-1/2 (419)	4-1/2 (114)	1/2 (13)
2	2	3	21-1/2 (546)	12-1/8 (308)	2-1/2* (64)	1/	11 (279)	11-1/2 (292)	6 (152)	1 (25)
3	2	4	21-1/8 (537)	14-1/2 (368)	3-1/2 (89)	4 (102)	13-1/2 (343)	14 (356)	4-1/2 (114)	1/2 (13)
3	3	4	21-5/8** (549)	10-3/8 (264)	2-3/4 (70)	3-1/2 (89)	9-1/8 (232)	9-7/8 (251)	4-1/4 (108)	3/4 (19)
4	2	5	28 (711)	11 (279)	3-1/2 (89)	4-1/2 (114)	10 (254)	10-1/2 (267)	5 (127)	1/

1/ Manufacturer's standard.

* Vertical depth.

** Including separating lugs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.3.2 Pans. The bread pans except for the style 2, size 2 bread pan set, shall be fabricated of one piece of the aluminized steel specified in 3.2.3 with a thickness of 0.0218 inch (0.55 mm) nominal. The style 2, size 2 set (hearth) pan shall be fabricated of one piece of the tin plate specified in 3.2.2 not thinner than 25 gage (0.0218 inch (0.55 mm) nominal). Wire bead edges shall be as specified in 3.3.5.

3.3.3 Style 3, size 3, pan sets. When style 3, size 3 pan sets are intended for use in peel ovens (see 6.2), they shall be provided with protective plates or shock absorbers to protect against end damage from the peel. Plates shall be fabricated of the same material as the pans. The plates shall be not thinner than 19 gage (0.0468 inch (1.2 mm) nominal). The plates shall be permanently attached to the end pans and held in place by the straps at each end of the pan sets. Four separating lugs located in accordance with the manufacturer's standard practice shall be provided. Each separating lug shall be formed as an integral part of the strapping and shall keep the pan sets separated by 1 inch $\pm$ 1/4 inch (25 $\pm$ 6 mm) at all sides.

3.3.4 Style 2, size 2 pan sets (hearth pans). Style 2, size 2 pan sets shall have not less than two spacers between the individual pans. Spacers shall be fabricated of the wire specified in 3.2.1 with a diameter of not less than 0.177 inch (4.5 mm). Spacers shall be welded to the wire pan frames. The pan shall be perforated in accordance with the manufacturer's standard practice. The end panels and the two top sides shall be wrapped around a wire to form a bead. The wire shall be butt welded. The wire shall be as specified in 3.2.1 with a diameter of 0.207 inch (5.3 mm) nominal. The liner shall have either curved or flared sidewalls. Strapping shall be as specified in 3.3. The strapping shall be held in place by spot-welding or projection welding or by riveting. Rivets, when used, shall pass through the external end folds (laps) of the pan only, or may pass entirely through the ends of the pan provided the rivet heads on the inside of the pan are thin, flat and tight.

3.3.5 Wire bead. All pans shall have a top edge wire bead encircling the entire pan. The wire shall be as specified in 3.2.1. The wire bead shall be not less than nominal 0.148 inch (3.8 mm) diameter for all pans except for the hearth pan which shall be nominal 0.207 inch (5.3 mm) diameter.

3.4 Marking for identification. Each bread pan or pan set shall be marked with the manufacturer's name, trade name, or trademark of such known character easily identifiable with said manufacturer.

3.5 Finish. The exterior surfaces of the pans shall be finished in accordance with the manufacturer's standard practice. The inside surfaces of the pans shall be glazed with the glazing compound specified in 3.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The finished bread pan sets shall be clean and free of imbedded foreign matter, rust, sharp or rough edges, dents, burrs, die marks, buckles, deformities, fractures, punctures, scale, and pits. Welds shall be sound, smooth, clean and free of porosity and surface burns. All rivets shall be tight and the rivet heads shall be concentric and in full contact with the riveted metal surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End product inspection. The lot shall consist of all pans or pan sets of one style and size offered for inspection at one time. The sample unit shall be one completely fabricated pan set.

4.2.2.1 Visual examination. Visual examination shall be made in accordance with the classification of defects in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of visual defects

Examine	Defect	Classification Major	Minor
Finish	Not in accordance with manufacturer's standard practice	X	
	Inside of pans not glazed	X	
Construction and workmanship (general)	Rusty, imbedded foreign matter	X	
	Burrs, sharp edges	X	
	Die marks, dirty, dents over 1/16 inch (1.6 mm) deep	X	
	Scale, pits	X	
	Fractures, punctures, deformities	X	
	No provisions on strapping band to prevent shifting when pans are nested (style 2, 3, and 4 only)	X	
	Component missing, misaligned, or not securely fastened	X	
Welding	Not type specified, missing, not sound	X	
	Not clean, not smooth, porous, surface burns	X	
Rivets (when applicable)	Not type specified, missing, loose, not concentric, not in full contact with riveted surfaces	X	
Wire bead	Loose (top edge of pan not tightly rolled over wire)	X	
Style 2, size 2	Liner not perforated	X	
Marking	Missing, illegible, not as specified		X

4.2.2.2 Dimensional examination. Examination shall be made to determine compliance with dimensions specified. Any noncompliance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored in accordance with table IV. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery except it need not be closed. The inspection level shall be S-4 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE IV. Packaging Inspection

Examine	Defect
Marking (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Components missing or damaged or not as specified
Contents	Number per carton is not as specified
Workmanship	Case liner improperly fabricated or not sealed as specified Bulged or distorted container Inadequate application of components such as: incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling

4.2.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601, PPP-B-591, PPP-B-576, or PPP-B-621, examination for defects in closure and strapping shall be in accordance with the applicable container specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A packaging. Bread pans and bread pan sets shall be packaged in the quantities specified in table V in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Bread pans and bread pan sets shall be preserved and packaged in accordance with normal commercial practice. The complete package shall be designed to protect the item against damage during shipment, handling, and storage.

5.2 Packing. Packing shall be level A or commercial, as specified (see 6.2).

5.2.1 Level A packing. Bread pans and bread pan sets packaged as specified in 5.1, shall be packed in the quantities specified in table V in a shipping container conforming to overseas type of PPP-B-601. Each shipping container shall be provided with a type I or II, grade C sealed case liner conforming to MIL-L-10547. Closure and reinforcing shall be in accordance with the appendix of PPP-B-601.

TABLE V. Packaging and packing of bread pans and bread pan sets

Style and size	Quantity per package	Quantity per shipping container
Style 1, individual bread pans	40	120
Style 2, three-pan set		
Size 1	1/	12
Size 2	12	24
Style 3, four-pan set		
Size 2	1/	12
Size 3	12	24
Style 4, five-pan set		
Size 2	1/	10

1/ Packaging not required.

5.2.2 Military requirements. Bread pans and bread pan sets packaged as specified in 5.1, shall be packed in the quantities specified in table V in a shipping container conforming to domestic type, style A or B of PPP-B-601 or PPP-B-591; class 1 of PPP-B-576; or class 1, style 2 or 4 of PPP-B-621. Closure and reinforcing shall be in accordance with the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

5.2.3 Commercial packing. Bread pans and bread pan sets shall be packed in fiberboard boxes that will assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling and storage. The shipping container shall be in compliance with National Motor Freight Classification or Uniform Freight Classification.

5.3 Unitization (Civil agency). When shipments to Government depots are full car or truckload, the shipping containers shall be unitized to facilitate handling in accordance with normal commercial practice. The unitized load shall not exceed 2,500 pounds (1134 kg) in weight, 63 inches (1600 mm) in height, 56 inches (1422 mm) in length and 45 inches (1143 mm) in width.

5.4 Marking.

5.4.1 Civil agencies. Marking shall be as specified in the contract or order.

5.4.2 Military requirements marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bread pans and bread pan sets covered by this specification are for use in bakeries. Style 2, size 2 pan sets are intended for baking hearth type French and rye breads.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Style and size bread pan set required (see 1.2).
(c) When style 3, size 3 pan sets are for use in peel ovens (see 3.3.3).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Supersession data. Style 3, size 5 and style 4, size 1 bread pan sets have been deleted as these items are not covered by stock numbers. Style 2, size 2 substitutes for former style 3, size 4 which has been deleted as it was not easily available. Options grade A and B have been eliminated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

6.5 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and for information only. In each instance, the value stated in US customary units shall be controlling.

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD
Navy - MC

User activity:

Navy - YD

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA - FSS
HEW - NIH
VA - DMS

Project No. 7330-0438

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

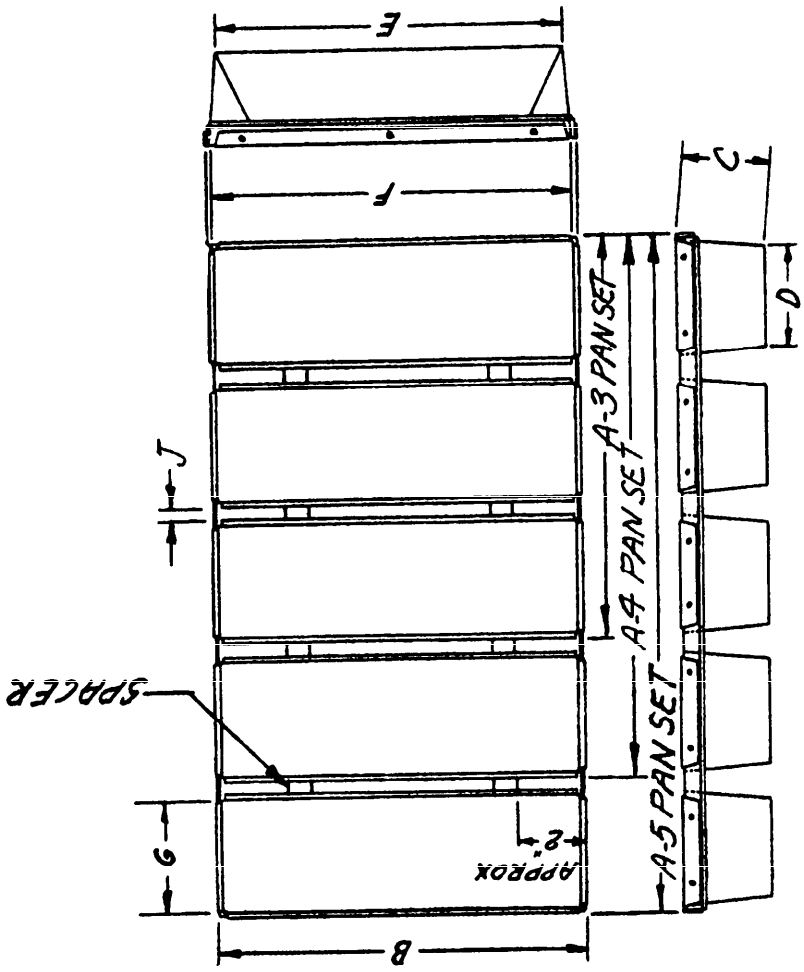


FIG. 1 PANS, BREAD

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 90 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.