RR–S–131a
MARCH 7, 1956

SUPERSEDING
Fed. Spec. RR–S–131
March 3, 1939

FEDERAL SPECIFICATION

SCOOP, KITCHEN, CORROSION-RESISTING STEEL, 7⅞ INCHES LONG, 5¼ INCHES WIDE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. — This specification covers one type and grade of corrosion-resisting steel kitchen scoop, consisting of a short handle attached to a deep bowl having one side open for scooping.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

NN–B–591 — Boxes, Fiberboard, Wood-Cleated (For Domestic Shipment).

QQ–M–151—Metals; General Specification for Inspection of.

QQ–S–766 — Steel, Corrosion-Resisting: Plates, Sheets, Strips and Structural Shapes.

UU–T–111—Tape, Paper, Gummed (Sealing and Securing).

LLL–B–631—Boxes; Fiber, Corrugated (For Domestic Shipment).

PPP–B–601 — Boxes, Wood, Cleated-Plywood.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

JAN–P–106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed (for weight of contents not in excess of 1,000 pounds).

MIL–L–10547—Liners, Case, Waterproof.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

MIL–STD–130—Identification Marking for U. S. Military property.

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample.—Unless otherwise specified in the invitation for bids, a sample

362248—56—No. 228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

of the subject commodity shall be submitted to the contracting officer for approval before production is commenced.

3.2 Materials.

3.2.1 *Steel, corrosion-resisting.*

3.2.1.1 *Sheet or strip.*—The corrosion-resisting steel sheet shall conform to class 7, condition A, finish 4, Federal Specification QQ–S–766.

3.3 Construction.

3.3.1 *Scoop.*

3.3.1.1 *Body.*—The body of the scoop shall be formed seamless from a single piece of corrosion-resisting steel sheet specified in 3.2.1.1. It shall be of the covered type as shown on figure 1.

3.3.1.2 *Handle.*—The body of the scoop shall be fitted with a handle fabricated from a single piece of corrosion-resisting steel, seamless or welded tubing commercial type 430. The end of the handle shall be closed. The handle shall be either:

(a) Welded to a shield of corrosion-resisting steel sheet not less than 0.055 inch thick in such manner that the handle shall be completely sealed. The shield shall be securely welded to the body of the scoop, or

(b) Flanged to a diameter as shown on drawing and securely welded to the body of the scoop in such manner that the handle shall be completely sealed.

3.3.1.3 *Salt spray.*—Scoops shall conform to salt-spray test specified in 4.4.


3.3.2 *Finish.*

3.3.2.1 The entire inside and outside surfaces shall have a commercial No. 4 finish.

3.3.2.2 *Cleaning.*—As a final operation, the scoop shall be thoroughly cleaned to remove foreign particles of dirt, grease, graphite and metal.

3.4 Marking for identification. — Each scoop shall be impressed on the bottom with the letters "U. S." and the manufacturer's name or trade-mark in accordance with Military Standard MIL–STD–130.

3.5 Workmanship. — The finished article shall be clean, well made and free from any defect which might affect appearance or serviceability.

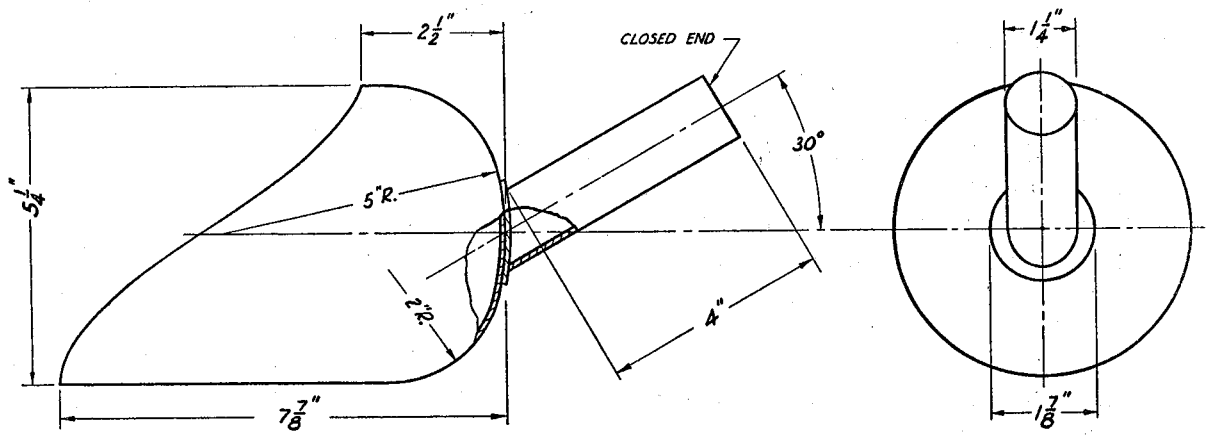

NOTE:
BODY - FINISHED THICKNESS NOT LESS THAN 0.032 INCH THICK AT ANY POINT.
HANDLE - FINISHED THICKNESS NOT LESS THAN 0.055 INCH THICK AT ANY POINT.

UNLESS OTHERWISE STATED; FABRICATING TOLERANCES ARE: DECIMALS ± —; WHOLE NUMBERS AND FRACTIONS ± 1/16; DEGREES ± 1/2°

FIGURE 1.—Scoop, kitchen, corrosion-resisting steel, 7⅞ inches long, 5¼ inches wide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 General.—The quality assurance provisions contained herein are applicable to inspection performed by and for the Government. Quality assurance provisions for components or materials described shall be in accordance with this specification.

4.2 Pre-acceptance inspection. — Not required.

4.3 Inspection for acceptance.—Inspection shall be in accordance with the provisions set forth in Military Standard MIL–STD–105, except where otherwise indicated herein.

4.3.1 *Inspection of components.*—Inspection shall be performed on components and materials listed below for the characteristics shown.

4.3.1.1 *Visual examination of components.*—The thickness of the corrosion-resisting steel handle components shall be checked prior to fabrication to assure that the stock is of sufficient thickness to meet the minimum thickness requirements after fabrication. The sample size shall be determined from table I.

4.3.1.2 *Testing of components.*—In addition to the quality assurance provisions of the subsidiary specifications and drawings, testing shall be performed on each 6 by 12 inch sample unit of corrosion-resisting steel for material identification specified in 3.3.1.2. The requirement for material identification is applicable to lot average. The sample size shall be determined from table I.

TABLE I.

Lot size (in pounds)	Sample size
Up to and including 800	2
801-3200	3
3201-8000	5
8001-22,000	7
22,001 and up	10

4.3.2 *End product inspection.* — The defects found during examination of the end product shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The Government reserves the right to require examination for any defect not included herein and to classify such defects in accordance with the definitions contained in Military Standard MIL–STD–105. The sample unit for these examinations shall be one scoop.

4.3.2.1 *Classification of defects.*

Examine	Defect
Finish	Dirty (foreign particles or materials not removed). Not a No. 4 commercial finish. Any surface not finished. Old grind marks not removed. Finish not uniform. Excessive grinding (thickness of scoop body reduced below minimum specified). Any surface imperfection not removed. Any rough or sharp part that might cause injury.
Construction	Scoop body not formed from one sheet. Not corrosion-resisting steel (any part). Wrong design (see figure 1). Handle not formed from single piece of tubing. End of handle not closed. Cracked, fractured or split.
Shield type handle	Weld to shield does not seal handle. Shield not securely welded and sealed to body.
Flanged type handle	Flange less than 1⅞ inches diameter. Flange not securely welded to body (check by supporting 3 pound weight in body). Flange not completely sealed to body.
For sanitation	Any crevice or opening (not susceptible to ready cleaning).
Welds	Weld flash not removed. Fillet weld not ground smooth.
Marking	Missing, misplaced, incomplete, or illegible. Not impressed. Impression penetrates (shows on interior).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4.3.2.2 *Dimensional examination.* — Inspection shall be made of the end item for defects in dimensions. Any deviation from the requirements of figure 1 which exceed the following tolerances shall be scored as a defect. The tolerances for whole numbers (exclusive of handle flange) are plus one-eighth of an inch and minus one-sixteenth of an inch. The tolerance for degrees is plus or minus 3 degrees.

4.3.2.3 *Acceptable quality levels (AQL's) for examination.*—The acceptable quality levels and inspection levels (sample size) shall be as follows:

	AQL	*Inspection Level*	
For defects listed in 4.3.2.1	2.5	II	MIL–STD–105
For defects listed in 4.3.2.2	4.0	Table I	

4.3.2.4 *Testing of the end product.*—Testing shall be performed on one scoop for corrosion resistance in accordance with 4.4 as specified in 3.3.1.3. The inspection level (sample size) shall be L–2 of appendix to Military Standard MIL–STD–105. The acceptable quality level shall be 6.5 defects per 100 units.

4.4 Salt-spray test. — From the scoop or scoops selected for test the following salt-spray test shall be conducted. Sample scoop or scoops shall be selected and submitted to a salt spray test in accordance with Federal Specification QQ–M–151 for a period of 24 hours. Before being placed in a salt-spray bath the specimen scoop to be tested shall be thoroughly cleaned by washing in petroleum ether and alcohol and then dried. Slight surface corrosion of the specimen which can easily be washed off shall not be considered as cause for rejection, but if the specimen should rust or show continuous bleeding from pits, it shall be considered as having failed to pass the test.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 *Level A, military package.* — Each scoop shall be individually packed in a style RSC corrugated fiberboard box, minimum 125 p.s.i. bursting strength, constructed to fit the contents in a compact manner and in accordance with Federal Specification LLL–B–631. All flaps shall be sealed with gummed paper tape, minimum 1½ inches wide, conforming to class 2, Federal Specification UU–T–111.

5.1.2 *Level C, minimum military package.*— Scoops shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing.

5.2.1 *Level A, military pack.*—Scoops packaged as specified shall be packed in containers constructed to fit the contents in a compact manner conforming to style A or B, Federal Specification PPP–B–601 (overseas type); or style 2 or 4, Military Specification JAN–P–106. The gross weight of each container shall not exceed 100 pounds. Each shipping container shall be provided with a type I or II, grade B or C, class 2, case liner conforming to Military Specification MIL–L–10547.

5.2.2 *Level B, limited military pack.* — Scoops packaged as specified shall be packed in containers constructed for a type 2 load and to fit the contents in a compact manner conforming to style A or B, Federal Specification NN–B–591 or PPP–B–601, respectively. Maximum gross weight 150 pounds; or conforming to style RSC, Federal Specification LLL–B–631, maximum gross weight 65 pounds. All flaps of the fiberboard container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps.

5.2.3 *Level C, minimum military pack.* — Scoops shall be packed in containers, which (together with packaging, wrapping, and inner packing), are acceptable by common or other carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies.

5.3 Marking.—Interior packages and shipping containers shall be marked in accordance with Military Standard MIL–STD–129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. — The corrosion-resisting steel scoop covered by this specification is intended for transfer of appropriate materials from one container to another.

6.2 Ordering data.—Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Nomenclature and stock number.

c. Whether preproduction sample is waived or required.

d. Whether the scoops shall be packaged and packed for level A, military, level B, limited military, or level C, minimum military as follows:

(1) Level A, military applies to that material to be transported by ocean-going or coastwise vessel and handled, issued, and stored in the military supply system.

(2) Level B, limited military applies to that material for storage and reshipment to a domestic receiving activity not involving sea transportation.

(3) Level C, minimum military applies to that material required for immediate use without storage or reshipment by the initial domestic receiving activity.

6.3 Transportation description.—Transportation description applicable to this item is:

Sheet steel ware, not otherwise indexed by name (indicate nested, not nested or nested solid, flat or folded flat).

Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Sheet steel articles, not otherwise indexed (indicate nested, not nested or nested solid, flat or folded flat).

Truckload minimum weight 20,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:
Army—M Q
Navy—Sh MC S
Air Force.

Copies of this specification may be purchased for cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.