RR-S-131b
January 31, 1963

SUPERSEDING
Fed. Spec. RR-S-131a
March 7, 1956

FEDERAL SPECIFICATION

SCOOP, KITCHEN, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type kitchen scoop.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 66—Steel; Chemical Composition and Hardenability.

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.


MIL-STD-130—Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activities or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (6.2), before production is commenced, a sample of the item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

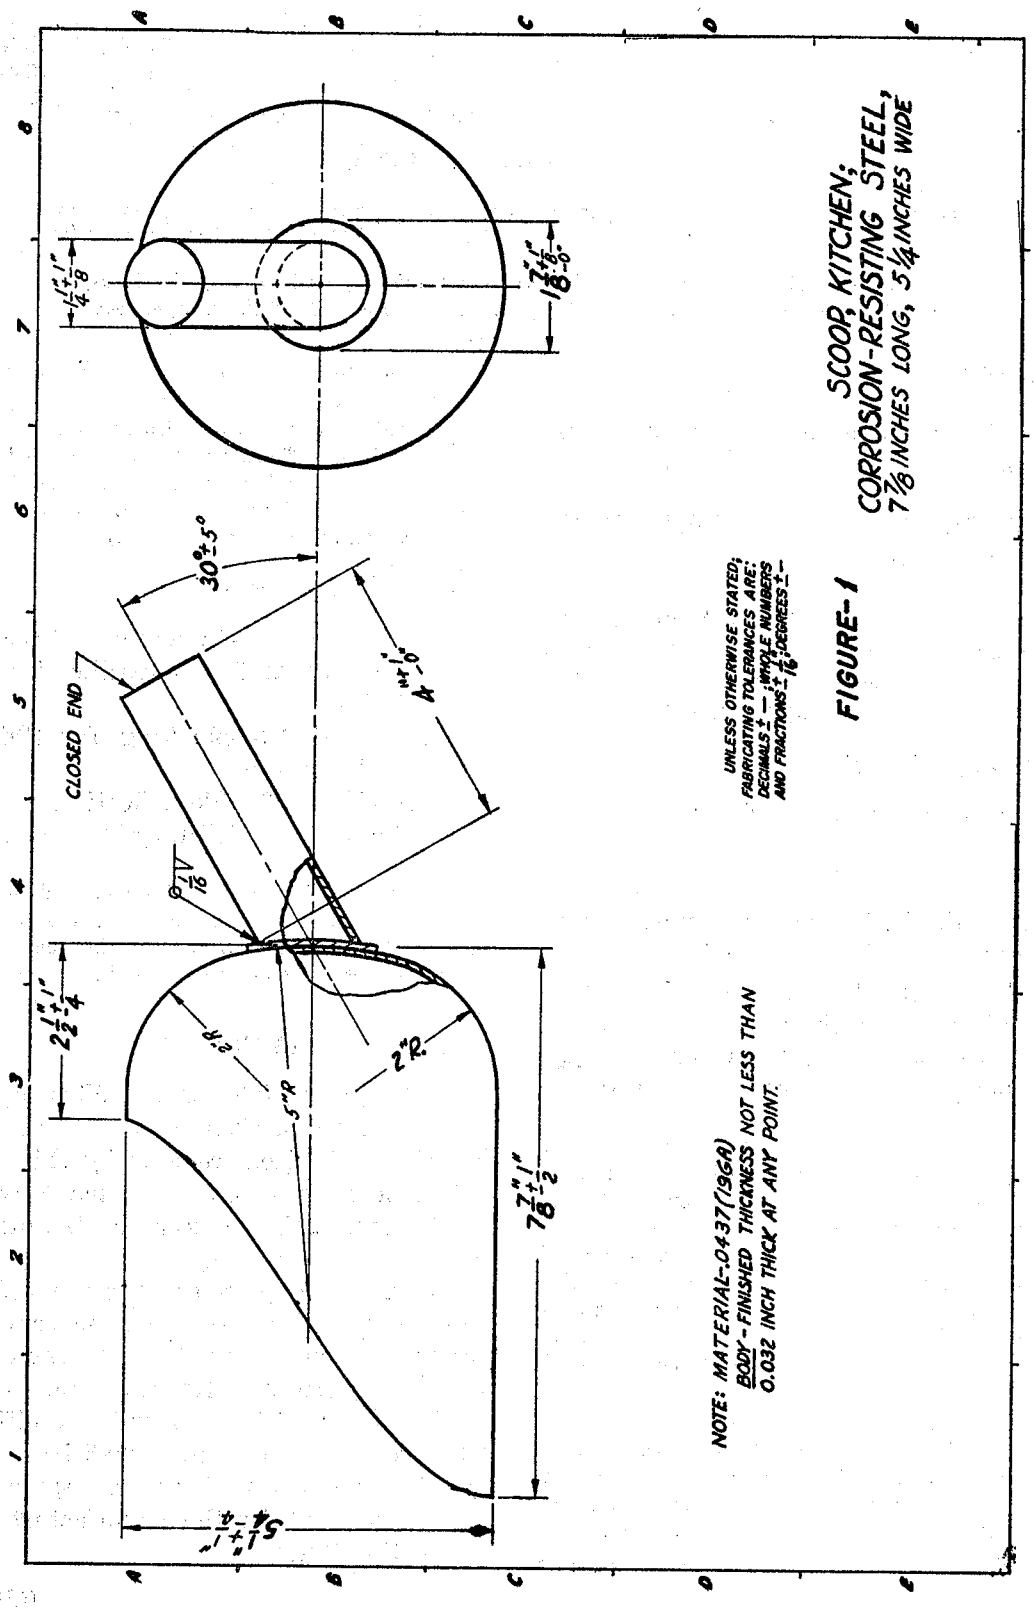

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.2 Standard product. The kitchen scoop shall be the manufacturer's current standard commercial production, except for any design and construction modifications required herein.

3.3 Materials. Corrosion-resisting steel shall conform to the chemical composition of AISI number 302 or 304 of Fed. Std. No. 66.

3.4 Design and construction. Design and construction shall be as specified herein, and on figure 1. Figure 1, except for dimensional limits, is illustrative only and is not intended to preclude any commercial design otherwise conforming to the specification requirements. The design of the scoop shall consist of a short handle attached to a deep bowl or body having one side open for scooping.

3.4.1 *Body.* The kitchen scoop shall consist of a corrosion-resisting steel body formed seamless from a single piece of material specified in 3.3.

3.4.2 *Handle.* The body of the scoop shall be fitted with a handle fabricated from a single piece of seamless or welded tubing of the same material as the body. The handle shall be completely sealed at both ends by continuous welding all around. The handle shall be either:

(*a*) Flanges to the diameter shown on figure 1 and securely attached to the body of scoop by spotwelding or continuous welding around the outside diameter of flange. When spotwelding is used, there shall be a minimum of 7 evenly spaced welds and the seam between the flange and body shall be sealed by continuous silver soldering; or

(*b*) Continuously welded to a shield of the same material as the body of scoop. The shield shall be not less than 0.055 inch thick and shall be securely attached to the body of scoop and sealed in same manner as the flange.

3.4.3 *Welding.* Surfaces or parts to be welded shall be free from oxide, scale, grease or other foreign matter. Welds shall have flux or spatter removed and shall be sound, smooth, and free from gas pockets, porosity, cracks, incomplete fusion, or deformation of material.

3.5 Finish. The inside and outside surfaces of the kitchen scoop body and the outside surface of the handle shall have a commercial No. 4 finish or better.

3.6 Marking for identification. Each kitchen scoop shall be stamped on the outside bottom of the body with the letters "U.S." marked in accordance with MIL-STD-130, with the manufacturer's name or trademark of such known characters that the source of manufacture may be readily determined.

3.7 Workmanship. The finished kitchen scoop shall be clean, free from pits, scale, indication of rust, burrs, and cracks, which may affect appearance or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order (6.2). The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample examination. The preproduction sample shall be examined for defects listed in 4.3.2.1 and for compliance with dimensions specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 *Component and material inspection.* In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.3.2 *End item inspection.*

4.3.2.1 *Visual examination.* Examination of the end item shall be in accordance with the classification of defects set forth below. The lot size shall be expressed in units of scoops for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely fabricated scoop. The inspection level shall be III and the acceptable quality level (AQL) expressed in defects per hundred units, shall be 2.5 for Majors and 6.5 for total number of defects.

Examine	Defect	Classification	
		Major	Minor
Finish	Not a No. 4 commerical finish or better	X	
	Any surface, as specified, not finished	X	
Workmanship	Not clean, or any surface imperfection not removed, (dirt, grease, or foreign particles) .		X
	Pits, scale, or indication of rust	X	
	Burrs or any rough or sharp edge that may cause injury .	X	
	Crack, fracture, or split	X	
Design	Not design specified	X	
Construction	Body of scoop not one-piece construction	X	
	Handle not one-piece construction	X	
	End of handle not closed	X	
Shield-type handle	Weld to shield does not seal handle ..	X	
	Shield not securely welded and sealed to body of scoop ..	X	
Flanged-type handle	Flange not securely welded to body of scoop	X	
	Flange not completely sealed to body of scoop	X	
Welds	Missing, completely broken or not fused	X	
	Cracked or partially broken, incomplete, or evidence of poor fusion		X
	Not ground smooth .		X
	Contain gas pockets, are undercut, or flux or spatter not removed		X
Identification marking	Missing, incomplete, illegible, or in wrong location ...		X

4.3.2.2 *Dimensional examination.* Inspection shall be made of scoops for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be L4 and the AQL shall be 6.5 defects per hundred units.

4.3.3 *Examination of preparation for delivery.* An examination will be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects will be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be L4 and the acceptable quality level shall be 4.0 defects per hundred units.

Examine	Defect
Markings (exterior and interior containers)	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, bulging or distortion of containers, sealing inadequate, improper or missing.
Contents	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY.

(For civil agency procurement, Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing.)

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A.* Each scoop shall be individually packaged in a fiberboard box conforming to type I, class 1, style RSC of PPP-B-636, except that the fiberboard shall be non-test. Closure shall be in accordance with the appendix of the box specification.

5.1.2 *Level C.* Scoops shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class 2, V3c or V3s, style RSC of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape or a case liner, and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type I or II, class 1, style RSC of PPP-B-636, except that the minimum bursting strength of the fiberboard shall be 275 p.s.i. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.3 *Level C.* Scoops, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The kitchen scoops covered by this specification are intended for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

use in the transfer of bulk food material from one container to another.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) When preproduction sample is required (see 3.1).

(*c*) Inspection record details (see 4.1).

(*d*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Sheet steel ware, not otherwise indexed by name (Specify nested or not nested)

Carload minimum weight 20,000 pounds subject to Rule 34, Uniform Freight Classification.

Motor:

Kitchen hand tools, not otherwise indexed, other than power operated.

Truckload minimum weight 20,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—Q

Navy—S

Air Force—MAA

Copies of this specification may be purchased for ents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.