RR-S-131c
June 5, 1967
SUPERSEDING
Fed. Spec. RR-S-131b
January 31, 1963

FEDERAL SPECIFICATION

SCOOP, KITCHEN, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of kitchen scoop.

2. APPLICABLE DOCUMENTS

2.1 Specifications and Standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-B-636 - Box, Fiberboard.

Federal Standards:

Fed. Std. No. 66 - Steel: Chemical Composition and Hardenability.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from estalbished distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF) Standard:
No. 2 - Food Service Equipment.
Seal of Approval Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, Ann Arbor, Michigan.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample scoop covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. Scoops delivered under this specification shall be the manufacturer's commercially current standard product except for any changes necessary to comply with specification requirements.

3.3 Sanitary standard. The scoops covered by this specification shall conform to NSF Standard No. 2.

3.3.1 NSF certification. Prior to approval of preproduction sample, if one is submitted, or prior to approval of the first shipment, the supplier shall submit to the contracting officer or his authorized representative, satisfactory evidence that the scoops he proposes to supply under this specification meet the applicable requirements of NSF Standard No. 2. Acceptable evidence of meeting the applicable requirements of this standard shall be an NSF seal, a listing in the NSF "Seal of Approval Listing of Food Service Equipment" catalog or a certified test report from a recognized independent testing laboratory, acceptable to the Surgeon General of the procuring service, indicating that the scoops offered conform to the applicable requirements of NSF Standard No. 2.

3.4 Materials. Materials, not definitely specified, shall be of the quality normally used by the manufacturer in fabricating his scoops.

3.4.1 Corrosion-resisting steel. Corrosion-resisting steel shall conform to the chemical composition of AISI number 302 or 304 of Fed. Std. No. 66.

3.5 Design and construction. Figure 1, except for dimensional limits, is illustrative only and is not intended to preclude any commercial design otherwise conforming to the specification requirements. The scoop shall consist of a short handle attached to a deep bowl or body having one side open for scooping.

3.5.1 Body. The body of the kitchen scoop shall be formed seamless from a single piece of corrosion-resisting steel specified in 3.4.1.

3.5.2 Handle. The body shall be fitted with a handle fabricated from a single piece of seamless or welded corrosion-resisting steel specified in 3.4.1, with the outer end closed flat or with a sperical radius by spinning or swaging. The handle shall be either:

(a) Flanged to the diameter shown on figure 1 and securely attached to the body of the scoop by spotwelding or continuous welding around the outside diameter of the flange. When spotwelding is used, there shall be a minimum of 7 evenly spaced welds and the seam between the flange and body shall be sealed.

(b) Continuously welded to a shield of the same material as the body of the scoop. The shield shall be not less than 0.055 inch thick and shall be attached to the body of the scoop and sealed in the same manner as the flange in (a).

3.6 Finish. The inside and outside surfaces of the scoop body and the outside surface of the handle shall have a commercial No. 2B finish or better.

3.7 Marking for identification. Each scoop shall be stamped on the outside bottom of the body with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished scoop shall be clean, free from pits, scale, indication of rust, cracks, sharp edges, burrs, or slivers.

3.8.1 Welding. Surfaces or parts to be welded shall be free from oxide, scale, grease, or other foreign matter. Welds shall have flux or spatter removed and shall be sound, smooth, and free from gas pockets, porosity, cracks, incomplete fusion, or deformation of material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for defects listed in table I and dimensions specified.

4.3 Sampling for inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.1.1 Corrosion-resisting steel analysis. Corrosion-resisting steel shall be analyzed in accordance with the check analysis procedures of Fed. Std. No. 66. Two samples shall be taken from each lot of material of the same form and thickness, unless the lot consists of only one piece, in which case only one sample shall be taken. Failure of any sample to comply shall be cause for rejection of the lot.

4.3.2 End product inspection. The inspection lot shall consist of all scoops offered for inspection at one time. The sample unit for this inspection shall be one scoop.

4.3.2.1 Visual examination. Examination shall be made of the end item for defects classified in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not a No. 2B commercial finish or better	X	
Design, construction, and workmanship, general (applicable to all components and assemblies)	Coarse grind marks, trimming marks, die marks, scale, pit, or rust		X
	Sharp edges, burrs, or slivers	X	
Body	Not seamless		X
Handle	Not one piece construction		X
	End of handle not closed as specified (spherical radius)	X	
	Type other than specified (flanged or shield)	X	
	Not attached as specified		X
Welding	Missing or incomplete	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd.)

Examine	Defect	Classification	
		Major	Minor
Design, construction, and workmanship, general (applicable to all components and assemblies) (cont'd.)			
Welding (cont'd.)	Not sound, or free of scale, grease, or other foreign matter; not smooth, incomplete fusion------		X
Marking	Missing, illegible, not manufacturer's name or trademark----------		X

4.3.2.2 Dimensional examination. Inspection shall be made of the scoop for compliance with dimensions specified herein. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.3 Code and standards conpliance. Proof of compliance with the requirements of NSF, as specified in 3.3.1, shall be available to the Government representative.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects will be scored as set forth in table II. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one container fully prepared for delivery, except it need not be sealed. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examination	Defect
Marking, exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components, such as bulging or distortion of containers.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each scoop shall be individually packaged in a fiberboard box conforming to style RSC, type CF, variety optional, class domestic of PPP-B-636, except that the fiberboard shall be nontest. Closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. Scoops shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), shipping containers shall be made from weather-resistant fiberboard conforming to V3c or V3s of PPP-B-636.

5.2.3 Level C. Scoops, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The scoops covered by this specification are intended for use in the transfer of bulk food material from one container to another.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.

(b) Whether preproduction sample is waived (see 3.1).

(c) Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).

(d) Whether weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).

6.3 Packaging. The method of packaging referred to in 5.1, is similar to method III of MIL-P-116.

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Preparing activity:

Army - GL

Review activities:

Army - MD
Navy - SA, MC
Air Force - 84, 85, 41

User activity:

Navy - CG

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

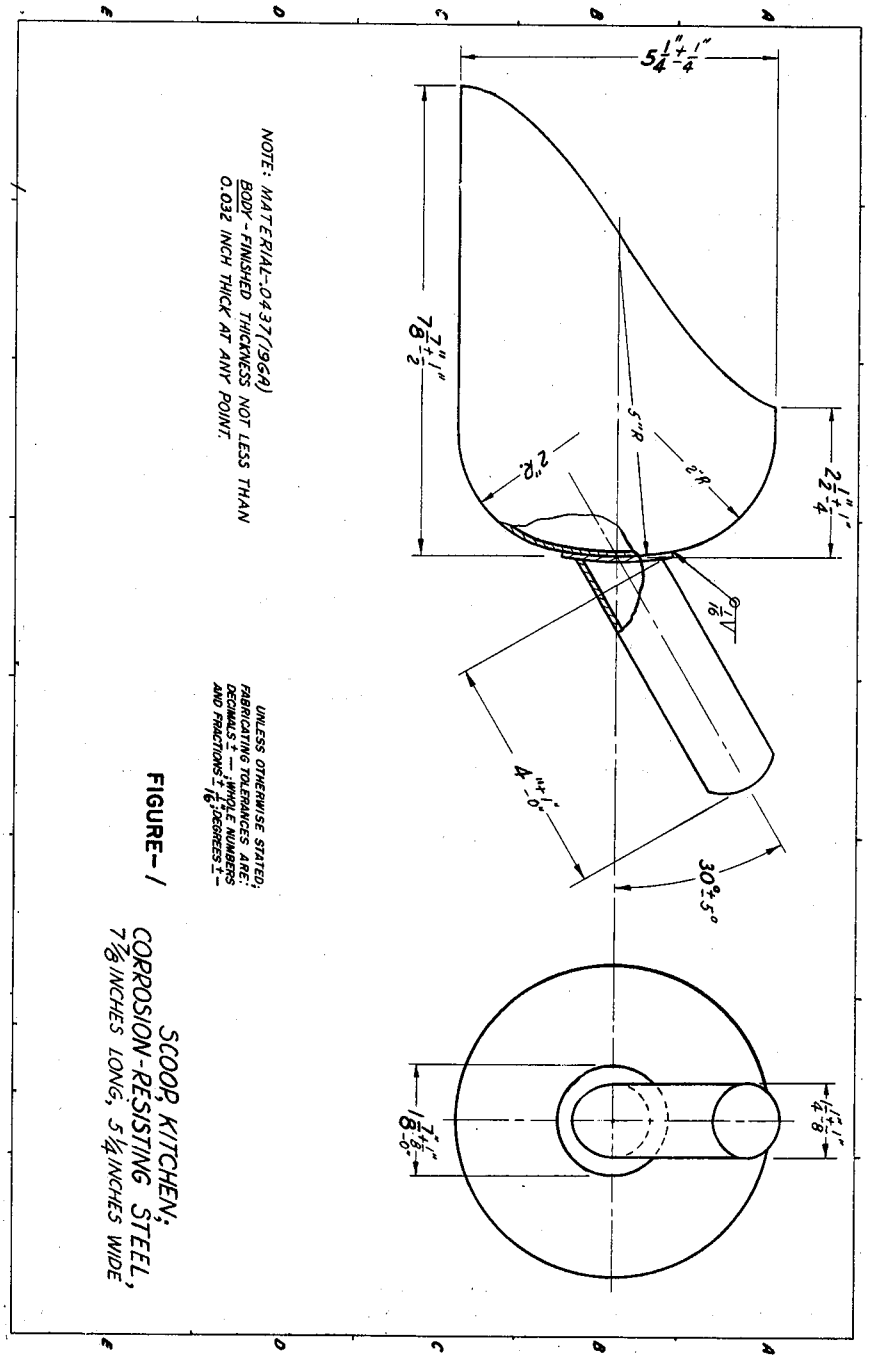


FIGURE-1

SCOOP, KITCHEN; CORROSION-RESISTING STEEL, 7⅞ INCHES LONG, 5¼ INCHES WIDE

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies of documents referenced herein. Price ents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.