RR-S-131D
July 2, 1971
SUPERSEDING
Fed. Spec. RR-S-131C
June 5, 1967

FEDERAL SPECIFICATION

SCOOP, KITCHEN, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type and size of corrosion-resisting steel kitchen scoop.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-B-636 - Box, Fiberboard.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-type Base.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Sanitation Foundation (NSF) Standard:

No. 2 - Food Service Equipment.

Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

American Society For Testing and Materials (ASTM) Standard:

A167-63 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the currentversion before use.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. Scoops delivered under this specification shall be the manufacturer's commercially current standard product except for any changes necessary to comply with specification requirements.

3.2 Standard compliance. The scoop covered by this specification shall conform to NSF Standard No. 2.

3.2.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the scoops he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished scoops shall be submitted prior to approval of the first shipment, or

(2) A certification for the scoops issued by NSF under their special one time evaluation/certification service shall be submitted prior to approval of the first shipment, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical authority functioning in advisory capacity to the preparing agency of the specification indicating that the scoops have been tested and conform to NSF Standard No. 2 shall be submitted prior to commencing production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer in fabricating his scoops provided the completed items comply with all provisions of this specification. Commercial tolerances are applicable to all metal thicknesses.

3.3.1 Corrosion-resisting steel. Corrosion-resisting steel shall conform to type 302 or 304 of ASTM A167-63.

3.4 Design and construction. Figure 1, except for dimensional limits, is illustrative only and is not intended to preclude any commercial design otherwise conforming to the specification requirements. The scoop shall consist of a short handle attached to a deep bowl or body having one side open for scooping.

3.4.1 Body. The body shall be formed seamless from a single piece of corrosion-resisting steel specified in 3.3.1.

3.4.2 Handle. The body shall be fitted with a handle fabricated from a single piece of seamless or welded corrosion-resisting steel specified in 3.3.1, with the outer end closed flat or with a spherical radius by spinning or swaging. The handle shall be fastened by either method (a) or (b):

(a) Flanged to the diameter shown on figure 1 and securely attached to the body of the scoop by spotwelding or continuous welding around the outside diameter of the flange. When spotwelding is used, there shall be a minimum of 7 evenly spaced welds and the seam between the flange and body shall be sealed.

(b) Continuously welded to a shield of the same material as the body of the scoop. The shield shall be not less than 0.055 inch thick and shall be attached to the body of the scoop and sealed in the same manner as the flange in (a).

3.5 Finish. The inside and outside surfaces of the body and the outside surface of the handle shall have a commercial No. 2B finish or better.

3.6 Marking for identification. Each scoop shall be stamped on the outside bottom of the body with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.7 Workmanship. The finished scoop shall be clean, and free from pits, scale, indication of rust, cracks, sharp edges, burrs, or slivers. There shall be no grind marks, trimming marks, or die marks.

3.7.1 Welding. Surfaces or parts to be welded shall be free from oxide, scale, grease, or other foreign matter. Welds shall have flux or spatter removed and shall be sound, smooth, and free from gas pockets, porosity, cracks, incomplete fusion, or deformation of material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End product inspection. The inspection lot shall consist of all scoops offered for inspection at one time. The sample unit for this inspection shall be one scoop.

4.2.2.1 Visual examination. Examination shall be made of the end item for defects classified in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not a No. 2B commercial finish or better	X	
Workmanship	Coarse grind marks, trimming marks, die marks, scale, pit, or rust	X	
	Sharp edges, burrs, or slivers	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Construction			
Body	Not seamless	X	
Handle	Not one piece construction		X
	End of handle not closed as specified	X	
	Design other than flange or shield	X	
	Not attached as specified		X
Welding	Missing or incomplete	X	
	Not sound, not free of scale, grease, or other foreign matter; not smooth, incomplete fusion	X	
Marking	Missing, illegible, not manufacturer's name or trademark		X

4.2.2.2 Dimensional examination. Inspection shall be made of the scoop for compliance with dimensions specified herein. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.2.3 Standards compliance. Proof of compliance with the requirements of NSF, as specified in 3.2.1, shall be submitted to the Government representative.

4.2.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table II. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one container fully prepared for delivery, except it need not be sealed. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery

Examination	Defect
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Component missing, damaged, or otherwise defective.
Content	Number per container is more or less than required.

4.2.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.2.4.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in Table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each scoop shall be individually packaged in a fiberboard box conforming to style RSC, type CF, variety optional, class domestic of PPP-B-636, except that the fiberboard shall be nontest. Closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. Scoops shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Twelve scoops, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), shipping containers shall be V3c, V3s or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Scoops, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Palletization (military requirements). Unless otherwise specified (see 6.2), scoops packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2 as specified (see 6.2).

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, all interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military agencies. In addition to any special marking required by the contract or order, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The scoops covered by this specification are intended for use in the transfer of bulk food material from one container to another.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.

(b) Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).

(c) Whether weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).

(d) When palletization is not required (see 5.3).

(e) Selection of marking required (see 5.4).

6.3 Packaging. The method of packaging referred to in 5.1, is similar to method III of MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the currentversion before use.

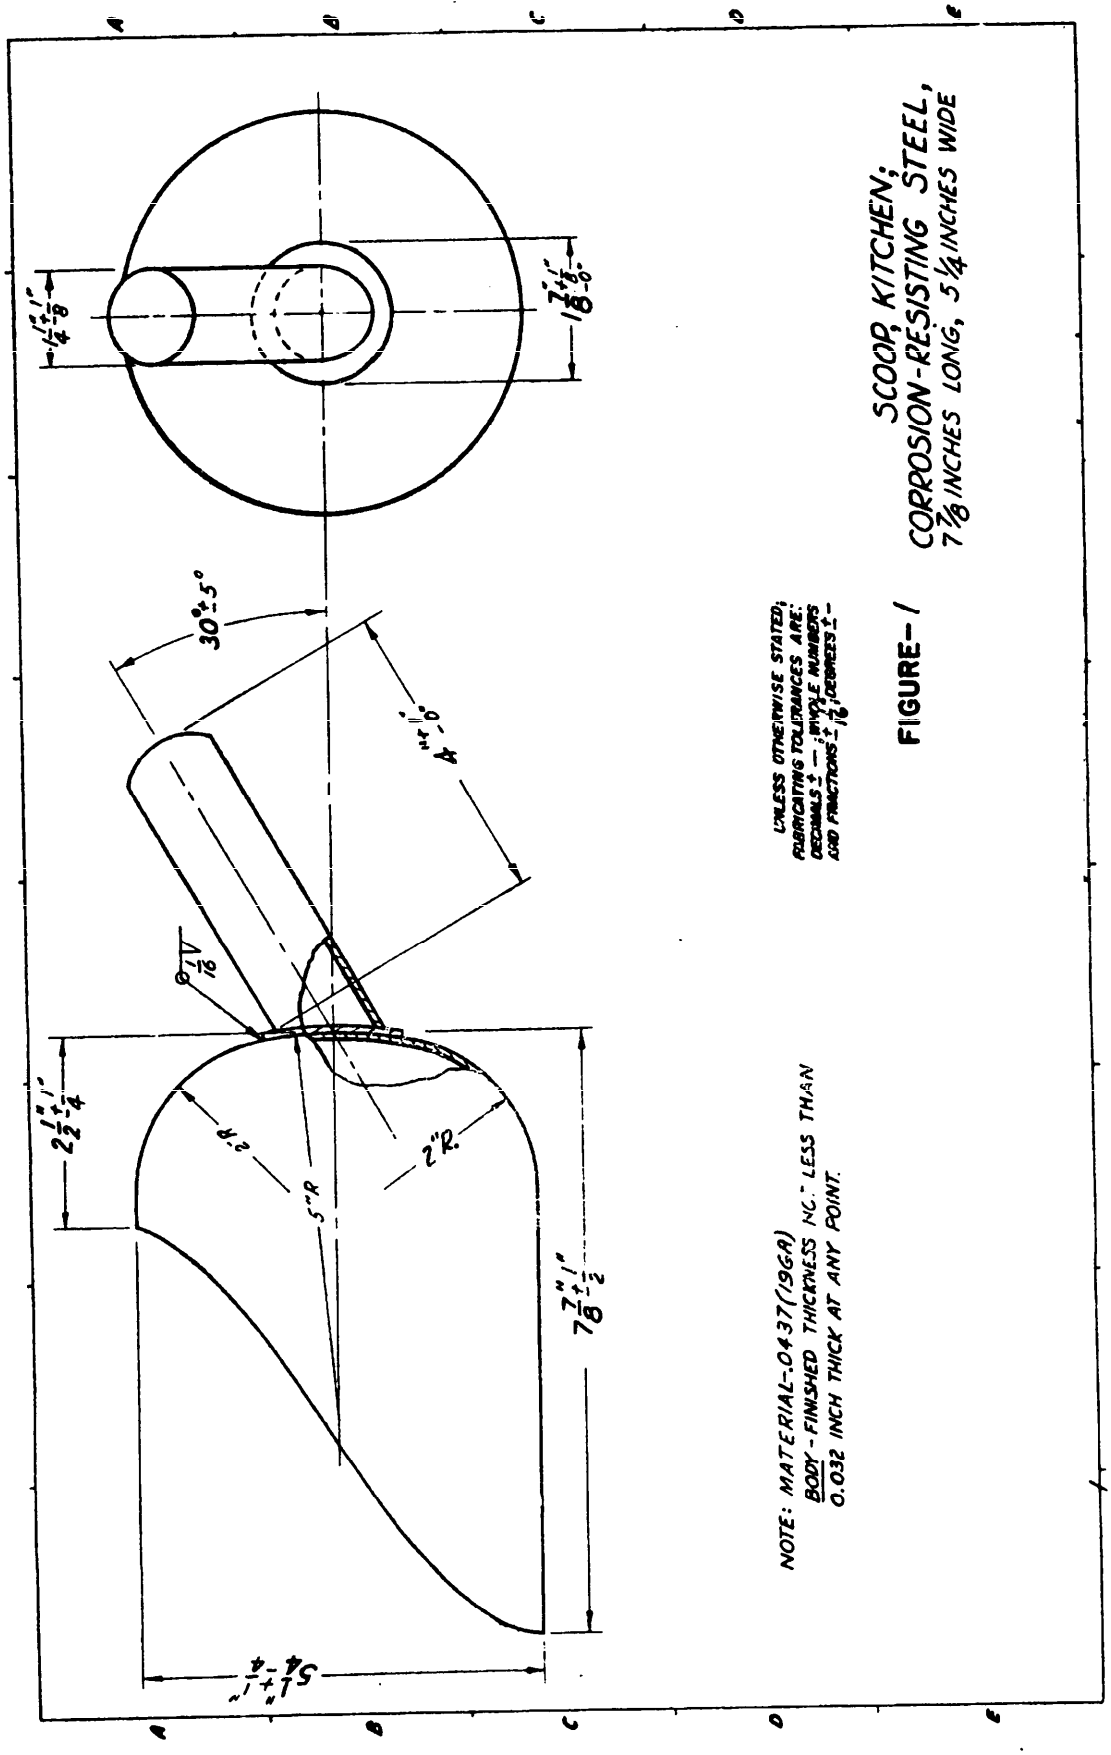


FIGURE-1 SCOOP, KITCHEN; CORROSION-RESISTING STEEL, 7⅞ INCHES LONG, 5¼ INCHES WIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, MS

User activities:

Navy - CG, YD

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
AGRI
HEW
VA

Project No. 7330-0298

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.