RR-T-25B
December 29, 1984
SUPERSEDING
RR-T-25A
February 24, 1969

FEDERAL SPECIFICATION

TABLE, STEAM-JACKETED KETTLE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers free standing and wall mounted corrosion-resisting steel tables for mounting the table tilting model kettles covered by RR-K-195.

1.2 Classification.

1.2.1 Styles and sizes. The tables shall be of the following styles and sizes as specified, (see 6.2).

Style 1 - Free standing
Style 2 - Wall mounted

Size 1. 2 - Kettle table 1/
Size 2. 3 - Kettle table 1/

1/ Specify whether table is for 2-1/2, 5-, or 7-1/2 gallon kettles or any combination thereof.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications

RR-K-195 - Kettles, Steam-Jacketed (Stainless Steel, Steam Heated)
PPP-B-636 - Box, Shipping, Fiberboard

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Standard

FED-STD-123 - Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specification documents, and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specification

MIL-P-116 - Preservation, Methods of

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U. S. Military Property
MIL-STD-147 - Palletized Unit Loads
MIL-STD-794 - Parts and Equipment, Procedures for Packaging and Packing of

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF):

Standard No. 2 - Food Service Equipment
Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, 3475 Plymouth, Ann Arbor, MI 48106.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

American Society For Testing And Materials (ASTM):

A123 - Zinc (Hot-Galvanized) on Products Fabricated from Rolled, Pressed and Forged Steel Shapes, Plates, Bars, and Strip
A167 - Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
A176 - Stainless and Heat Resisting Chromium Steel Plate, Sheet, and Strip
D3951 - Commercial Packaging, Practice for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish one table of each classification included in the contract for first article inspection and approval (see 4.2.1 and 6.4.1).

3.2 Standard commercial product. The tables shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the tables being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 NSF Standard. Tables shall conform to the applicable requirements of NSF Standard No. 2.

3.3.1 NSF Certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the table he proposes to furnish under this specification meets the applicable requirement of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished table, shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certified test report from a recognized independent testing laboratory acceptable to the contracting officer with the advice of the Army

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

Surgeon General, indicating that the tables have been tested and conform to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.4.1 Corrosion-resisting steel. Corrosion-resisting steel used for food-contact surfaces shall conform to any of the type 300 series specified in ASTM A167. When corrosion-resisting steel is used for other surfaces, the chemical compositions of any of the type 300 series of ASTM A167, or any of the type 400 series of ASTM A176 shall be used.

3.5 Design. The table exterior shall be corrosion-resisting steel as specified in 3.4.1, and the frame shall be carbon steel (see figure 1). The size 1 table shall be designed for holding two kettles of the capacity specified and the size 2 table shall be designed to hold three kettles of the capacity specified (see 6.2). Style 1 tables shall be provided with legs and style 2 tables shall have provisions for wall mounting in accordance with RR-K-195. The tables shall be of the step design and shall have a top surface for mounting the kettles and a lower surface for supporting a vessel to receive the liquid or food when the kettle is tilted. Openings in the top for mounting kettle supports and for connecting steam and condensate lines, shall be provided.

3.6 Construction. Tables shall be constructed as specified herein and as shown in figure 1. Style 1 and style 2 tables shall be of angle-frame construction enclosed by a nominal 0.0625-inch thick outer skin of corrosion-resisting steel, as specified in 3.4.1. Frame angles shall be carbon steel finished as specified in 3.9. The corrosion-resisting steel top shall be either tack-welded to the frame or secured with studs welded to the top skin and bolted to the framework. The tables shall have a continuous raised lip on all outer edges. Style 1 tables shall have a skirt on all four sides and style 2 tables shall have a skirt on the front and ends. The length of the tables shall be as necessary to mount the required size and quantity of kettles specified (see 1.2) +5 inches. A carbon steel channel extending the full length of the table and welded at each end to the frame shall be provided to support the kettles.

3.6.1 Drain trough. The lower surface of the table top shall be provided with a corrosion-resisting steel drain trough for collecting and draining spillage. The drain trough shall be pitched to allow complete drainage and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

shall have provisions for connecting drainage piping. The trough shall be provided with two or more removable louvered nonsplash covers fabricated of corrosion-resisting steel specified in 3.4.1. The top edge of the covers shall be flush with the table top and edges of slots or louvers in covers shall be smoothly finished. The covers shall be provided with lift-out holes for removal from the trough.

3.6.2 Legs. Style 1 tables shall be provided with corrosion-resisting steel adjustable leg assemblies with bullet-type feet. Legs shall be fabricated of nominal 1-5/8 inch tube and shall be removable from the under-table gussets. Tables shall be provided with four leg assemblies (two at each end). Legs shall provide a table height of 31 inches, ±1/4 inch when the bullet feet are screwed all the way in. In lieu of the leg gussets shown on the drawing the supplier may provide a corrosion-resisting steel threaded flange welded to the frame.

3.6.3 Mounting brackets. When specified (se 6.2), style 2 tables shall be provided with structural steel mounting brackets. The vertical members of the brackets shall be designed for mounting in the kitchen wall and welded to the horizontal bracket-members in the floor. The channel brackets shown in figure 1 are illustrative only and not restrictive.

3.7 Welding and brazing. Welding and brazing shall be complete, with no evidence of burn holes, cracks, severe undercuts, fractures, or porous areas. Welding and brazing shall be smooth and uniform, and there shall be no slag inclusion, or scale and flux deposits. All welding of corrosion-resisting steel shall be accomplished with welding rods having corrosion-resistant qualities equal to or better than the basic metal.

3.8 Identification marking. Identification shall be permanently and legibly marked directly on the table or on a corrosion-resisting metal plate securely attached to the table at the source of manufacturer. Identification shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer. Marking shall be applied in accordance with MIL-STD-130.

3.9 Finish. All finished surfaces shall conform to NSF Standard No. 2 and shall be smooth, uniform, and free of permanent soil or corrosion. Frame angle irons and channels shall be hot-dip galvanized in accordance with ASTM A123. The zinc coating shall be not less than 0.003-inch thickness nor less than 0.0034 inch average thickness.

3.10 Workmanship.

3.10.1 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.10.2 Corrosion-resisting steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that supplies and materials are inspected for compliance with all the requirements specified herein and in applicable referenced documents.

4.1.2 Standards compliance. The contractor shall make available to the contracting officer or his authorized representative evidence of compliance with the applicable standard cited in 3.3. The Government reserves the right to examine and test all tables to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one table when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, and the packaging inspection of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one completely assembled table. All tables offered for delivery at one time shall be considered a lot for the purpose of inspection. The inspection level shall be level II and the Acceptable Quality Level (AQL) shall be 2.5 defects per hundred units (DHU) for major defects and 6.5 DHU for minor defects. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separated from new lots, and shall be clearly identified as reinspected lots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4 Examination. Each table shall be examined for defects listed in table I. Each attribute within each classification of multiple defects shall constitute one defect.

TABLE I. Classification of defects.

Classification	Defects	Requirement paragraph
Major:		
101	Table not proper classification.	1.2
102	Materials not as specified.	3.4
103	Corrosion-resisting steel not as specified.	3.4.1
104	Design not as specified. No step design. Openings omitted, in properly assembled, or out of position.	3.5
105	Dimensions not as specified. (Any dimension not within specified requirement shall constitute one defect).	3.6 and Figure 1
106	Construction not as specified. Steel top not as specified. Lip not as specified. Skirt not as specified. Improper length. Channel not as specified.	3.6
107	Drain trough not as specified. Not properly pitched. Improper provision for piping. Covers not as specified.	3.6.1
108	Legs (for style 1 tables) not as specified.	3.6.2
109	Mounting brackets (for style 2 tables) not as specified.	3.6.3
110	Welding not as specified.	3.7
111	Zinc coating finish not proper thickness (Note 1).	3.9
112	Steel fabrication not of specified workmanship.	3.10.2
Minor:		
201	Nameplate missing, not securely affixed, or not corrosion-resisting material.	3.8
202	Marking missing, incomplete, or not legible.	3.8
203	Finish not smooth, uniform, or free of permanent soil or corrosion.	3.9
204	Threaded fasteners missing, broken, stripped, loose, or fractured.	3.10.1

NOTE 1: At least four coating thickness measurements shall be made to determine the average, each one on the flat of a different structural member of the table frame.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

4.5 Preparation for delivery inspection. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one unit prepared for shipment. Sampling shall be in accordance wit MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each table and components shall be packaged method III in a box conforming to PPP-B-636, class weather-resistant in accordance with MIL-P-116. Style 1 tables shall have the legs removed. Removable wall-mounting brackets and bolts for style 2 tables shall be packaged within the unit container. The drain trough covers shall be secured to prevent movement.

5.1.2 Commercial. Each table shall be packaged in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Levels A and B. Packing shall be in accordance with MIL-STD-794 for the applicable level specified. Containers shall be selected from table I of MIL-STD-794 for the appropriate level. Open crates shall not be used for level A packing.

5.2.2 Commercial. Tables shall be packed in accordance with ASTM D3951.

5.3 Palletization. Material shall be palletized in accordance with MIL-STD-147 when the following criteria are met:

a. Load to consist of four or more unskidded containers; and,
b. Load shall utilize a minimum of 80 percent of the pallet base.

5.4 Marking.

5.4.1 Military agencies. Shipments to military agencies shall be marked in accordance with MIL-STD-129.

5.4.2 Civil agencies. Shipments to civil agencies shall be marked in accordance with FED-STD-123.

6. NOTES

6.1 Intended use. The tables covered by this specification are intended for use in kitchens of Federal civil agencies and Military hospitals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers shall select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Style and size required, including capacity of each kettle (see 1.2.1 and 3.5).
c. First article. When a preproduction sample is not required (see 3.1, 4.2.1, and 6.4.1).
d. When mounting brackets (style 2 tables only) are required (see 3.6.3 and 6.3).
e. Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

6.3 The contracting officer should determine that mounting brackets for style 2 tables, when procured separately, are designed for the end item table to be provided under this specification.

6.4 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 52.227-7031 of the Federal Acquisition Regulations (FAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of FAR 52.227-7031 are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4.1 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one table. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

MILITARY CUSTODIAN:

Custodian

Navy - YD

Review Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITIES:


GSA - FSS
VA - OSS

Preparing Activity:

Navy - YD

DoD project 7320-N752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

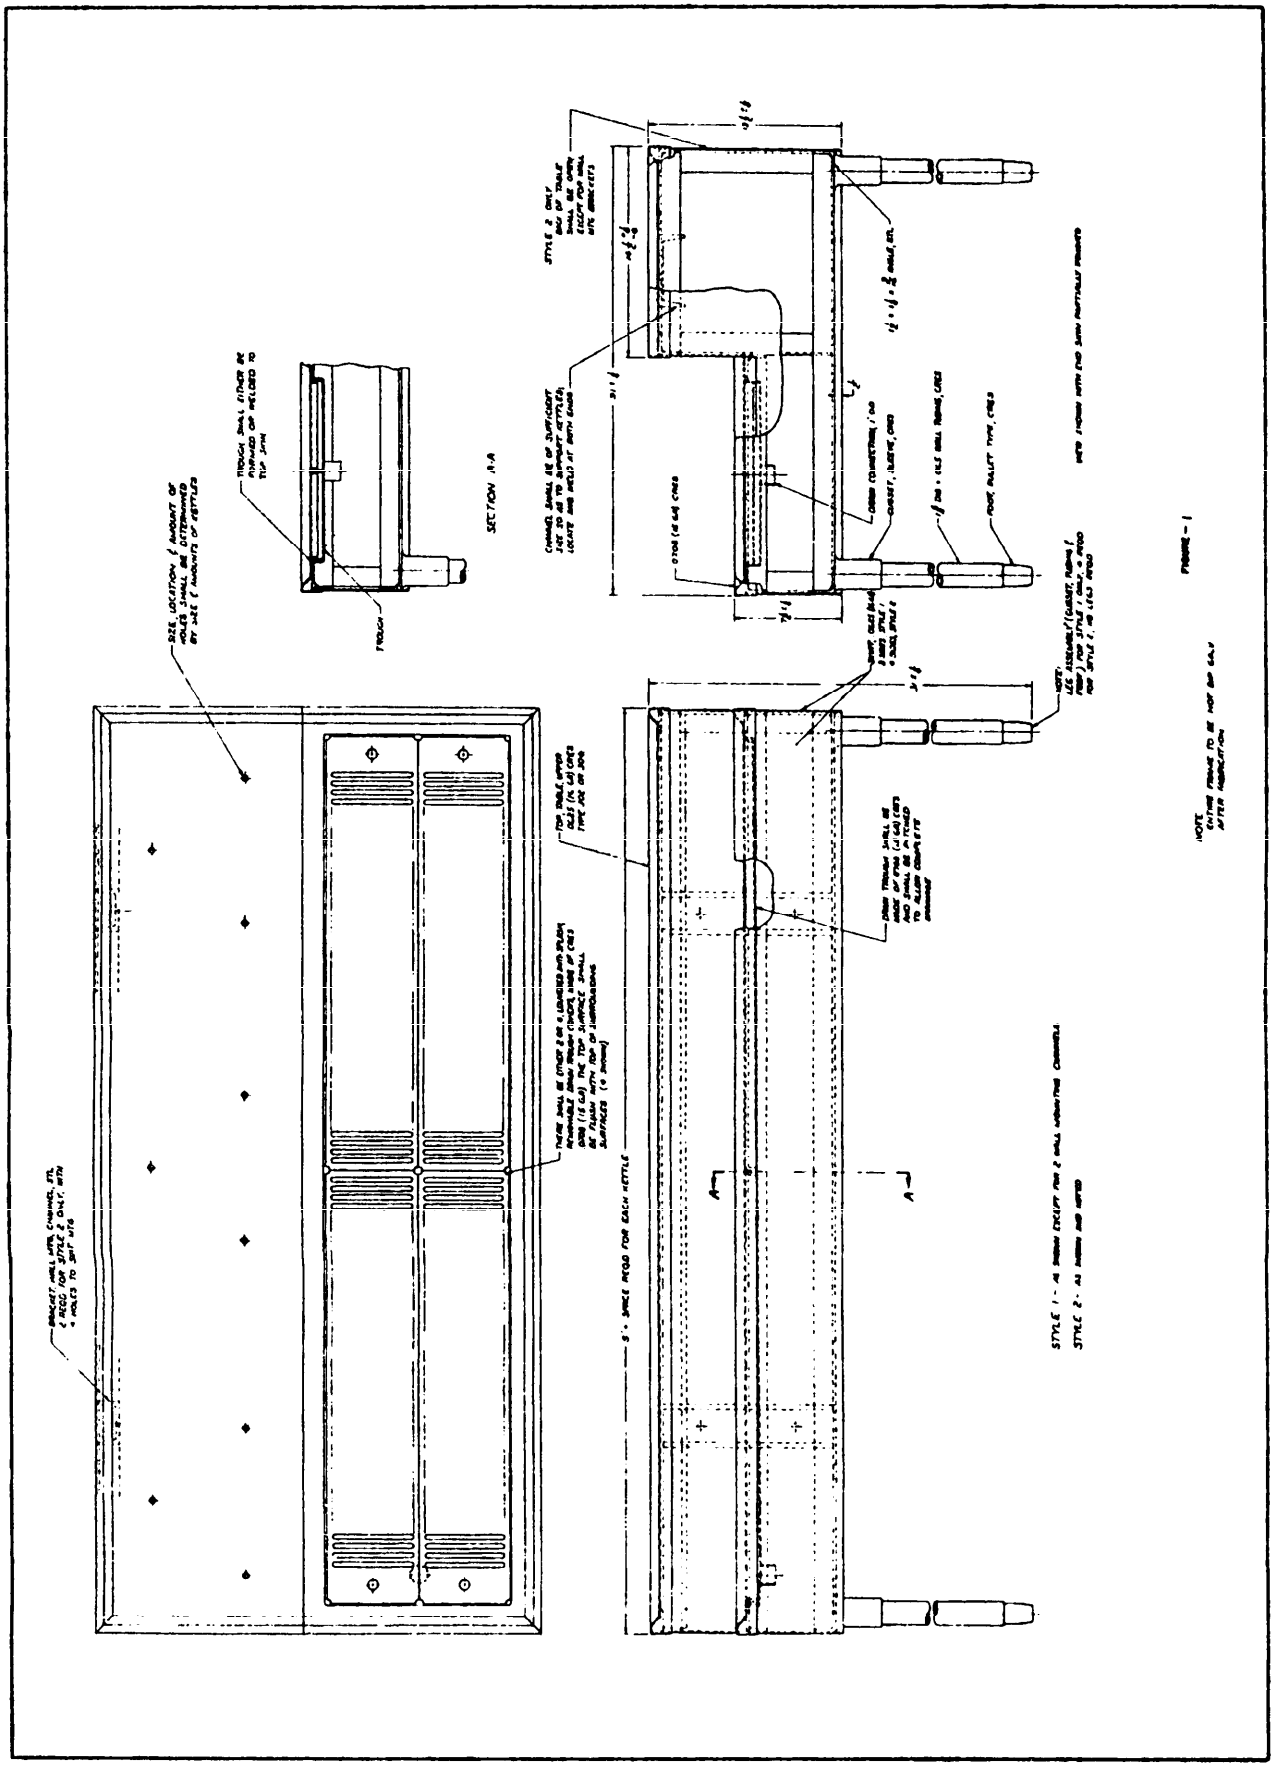

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.