RR-W-75B
August 12, 1970
SUPERSEDING
Fed. Spec. RR-W-75A
November 9, 1962

FEDERAL SPECIFICATION

WASTE RECEPTACLE, STEP-ON TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of waste receptacle having an outer container with or without a bail, removable inner container with a bail, and a hinged cover operated by a foot-actuated mechanism.

1.2 Classification.

1.2.1 Grades and sizes. Receptacles shall be furnished in the following grades and sizes of inner containers, as specified (see 6.2):

Grade A - Corrosion-resisting steel.

Size 1 - 3 gallons.
Size 2 - 5 gallons.

Grade B - Carbon steel.

Size 1 - 3 gallon.
Size 2 - 3 1/2 gallon.
Size 3 - 5 gallon.

1.2.2 Colors. The grade B receptacle shall be furnished in the following colors, as specified (see 6.2):

White
Ivory
Grained Walnut
Mahogany
Light Green

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Specifications:

QQ-S-766 - Steel Plates, Sheets, and Strip - Corrosion Resisting.
QQ-S-775 - Steel Sheets, Carbon, Zinc-Coated.
PPP-B-576 - Box, Wood, Cleated, Veneer, Paper-Overlaid.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-591 - Boxes, Fiberboard, Wood, Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from the established distribution points in their agencies.)

Military Specification:

MIL-L-10547 - Liners, Case, Water-proof.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MS 16686 - Medical-Services Symbol.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Standard:

A153 - Zinc Coating (Hot-Dip) on Iron or Steel Hardware.

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

3. REQUIREMENTS

3.1 Standard product. The waste receptacle covered by this specification shall be the standard product of the manufacturer except for such deviations from the manufacturer's standards as may be required by this specification.

3.2 Preproduction sample. When required (see 6.2), before production is commenced, a sample of the waste receptacle required shall be submitted or made ready for approval by the contracting officer or his authorized representative. The purpose of testing the preproduction sample is to determine whether the item manufactured by the contractor has the performance characteristics required by the specifications. It is not the purpose of preproduction sample testing to determine compliance with the detailed requirements of the specification and approval of the preproduction sample does not constitute approval of the item as complying with the detailed requirements of the specifications inasmuch as each production item must comply with the detail requirements of the specifications. The preproduction sample shall be manufactured by the contractor in the same facilities to be utilized for manufacture of the production item.

3.3 Materials. The materials specified shall conform to the requirements specified hereinafter. Materials not specified shall be as regularly used by the manufacturer.

3.3.1 Steel.

3.3.1.1 Carbon. Carbon-steel sheets, strips, shapes, and rods used in the fabrication of items covered by this specification shall be either hot-rolled or cold-rolled, commercial quality, free from loose scale, rough and sharp edges, defects or imperfections which may impair the appearance or strength of the end item.

3.3.1.2 Pregalvanized sheet steel. Pregalvanized sheet steel shall conform to the requirements of Type I, class d of QQ-S-775.

3.3.1.3 Corrosion-resisting. Corrosion-resisting steel (CRES) shall conform to the chemical composition of class 302 or 304 of QQ-S-766.

3.3.2 Rubber. Rubber shall be commercial, synthetic or natural, nonmarking, resilient rubber as regularly used by the manufacturer.

3.3.3 Spring wire. Spring wire shall be commercial spring wire coated to resist corrosion or shall be made from corrosion-resisting material.

3.4 Design. The receptacles shall provide a sanitary enclosure for waste material within a cylindrical inner container supported within a cylindrical outer container. Outer containers shall be fitted with a hinged cover automatically closing after being activated by a cover-lifting mechanism operated by a foot pedal at the bottom. Foot pressure on the pedal shall not affect the stationary position of the receptacle. The inner container shall be provided with a bail for lifting the inner container from the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

outer container. The bail on the inner container of grade A receptacles shall also serve as a carrying handle for the complete waste receptacle.

3.5 Construction. Details of construction shall be as hereinafter specified. Details not specifically covered shall be in accordance with the manufacturer's regular commercial practice. When tested as specified in 4.4.1, the waste receptacles shall not tip or tilt. The cover shall open sufficiently to permit access to and unrestricted removal of the inner container. When foot pressure is released, the cover shall automatically close. Upon completion of the test, there shall be no evidence of distortion or malfunction of any components. When tested as specified in 4.4.2, the inner containers shall not leak.

3.5.1 Grade A waste receptacles. The size 1, grade A waste receptacle shall conform to the dimensions and details shown on figure 1 and as specified herein. The size 2, grade A waste receptacle shall conform to the dimensions and details shown on figure 1 except that the inner container height shall be 19 ± 1/8 inches and the outer container height shall be 21 ± 1/8 inches. All metal parts, except the cover-closing spring shall be fabricated from CRES specified in 3.3.1.3. When closing springs are utilized by the manufacturer, they shall be made from spring wire specified in 3.3.3.

3.5.1.1 Outer container. The body of the outer container shall be formed from one piece of 0.031-inch thick (22-gauge) CRES having a vertical lock seam or spot-welded lap seam at the rear. The upper rim shall have a bead rolled tight against the outside or inside surface. The bottom edge shall be similarly beaded, but against the inside surface. The upper rim shall be interrupted by two suspension slots serving to accommodate the inner container supporting lugs. The inside wall of the outer container shall be braced at the bottom with a channel-shaped cross brace welded to the walls as shown on figure 1. The brace shall be limited in height to clear the bottom of the inner container when it is suspended within the outer container.

3.5.1.2 Cover. The cover shall be made from one piece of CRES and shall be not less than 0.031-inch thick (22 gauge).

3.5.1.2.1 Cover silencer. A sponge-rubber strip of appropriate thickness, not less than 5 inches in length, shall be securely attached to the front inside seating flange surface of the cover to provide quiet closing.

3.5.1.2.2 Inner container retaining lug. The cover shall be provided with an automatic inner container retaining lug, spot-welded or riveted to the underside of the cover at the back near the hinge (see 3.5.1.3). The retaining lug shall be made from 0.031-inch-thick (22-gauge) CRES. As an alternate construction, the retaining lug may be securely welded to the hinge, which in turn shall be securely riveted or spot-welded to the cover. The lug shall be shaped so that the rim of the inner container is engaged along its circumference in such a manner as to lock the inner container within the outer container when the lid is in the closed position. With the cover closed, the waste receptacle shall be capable of being carried by the bail as a complete unit without lifting the cover. As the cover is raised by foot pressure on the pedal of the cover-lifting mechanism, the retaining lug shall clear the rim of the inner container. With the cover in the open position, the inner container shall be removable from the outer container by lifting with the bail with no interference from any waste receptacle components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

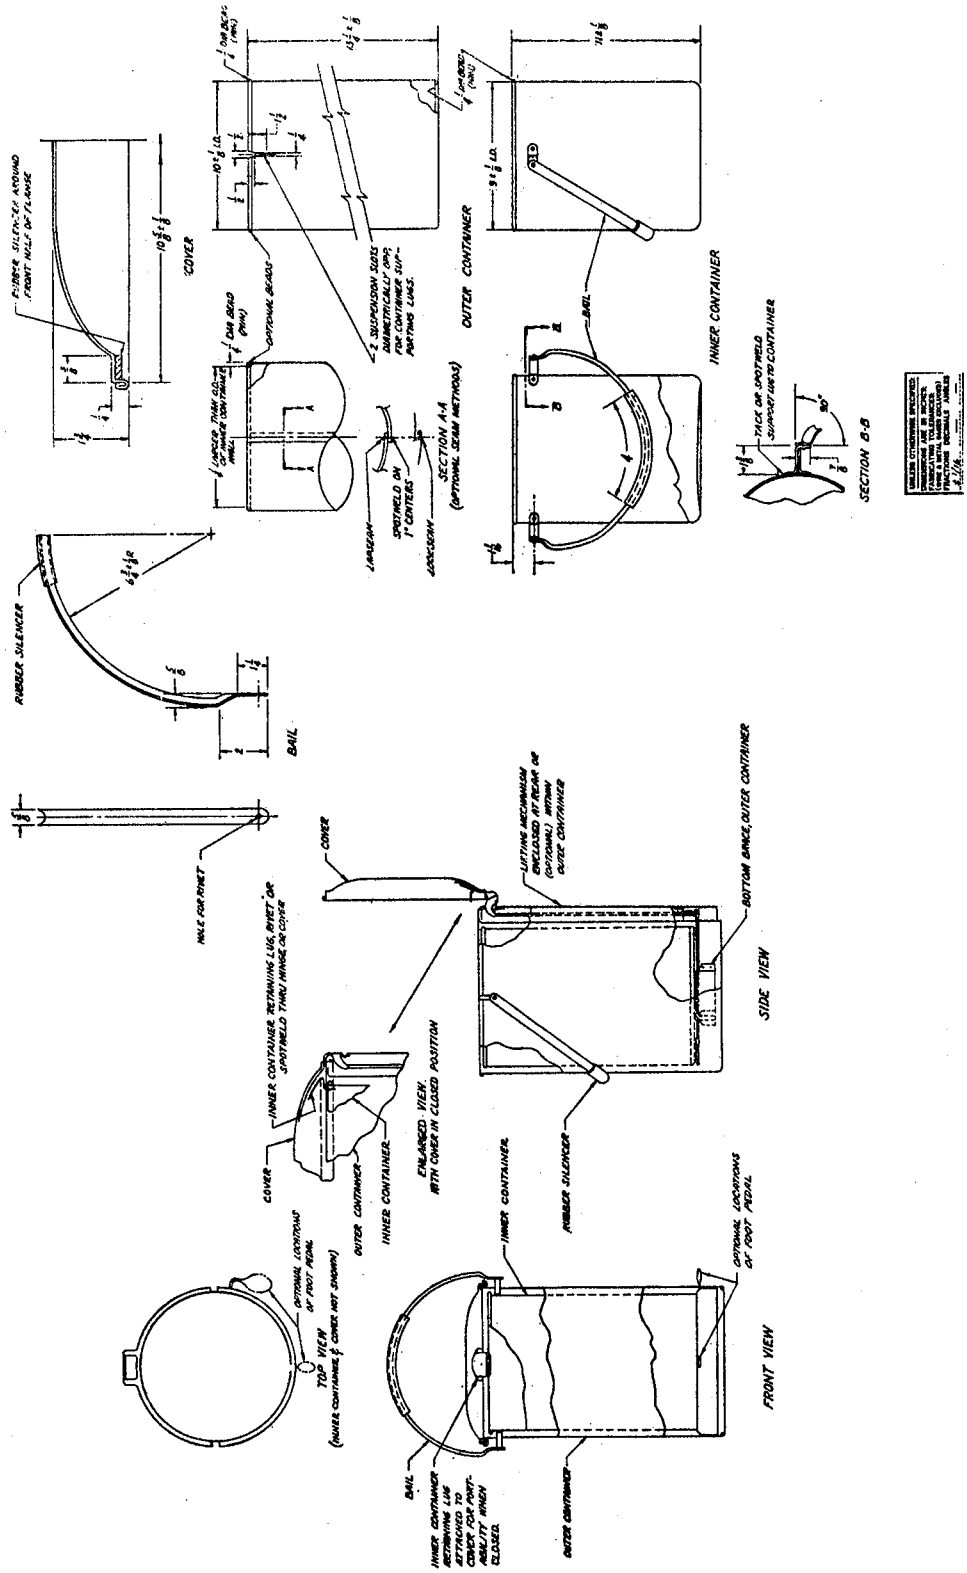


FIGURE 1 - Waste receptacle, step-on-type, 3 gallon capacity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5.1.3 Cover hinge. The cover shall be joined to the outer container by means of a hinge positioned so as not to interfere with the clear suspension or removal of the inclosed inner container. The hinge shall be formed from not less than 3/64-inch thick CRES. One half shall be attached to the inside of the cover by not less than 3 rivets or 4 spot welds. The remaining half shall be similarly attached to the outer container. The hinge pin shall be one piece or two pieces securely attached to prevent lateral motion of the hinge pin and cover. Necessary thrust members, to engage the cover-lifting mechanism, shall be provided on the hinge.

3.5.1.4 Cover-lifting mechanism. The waste receptacle shall be equipped with a bottom, center or right side, foot-pedal operated cover-lifting mechanism made from CRES. Suitable means shall be provided at the top extremity of the cover-lifting mechanism, for engaging the cover hinge thrust members. All vertical lifting mechanisms components shall be either inside the outer container or inside an enclosure spot-welded to the outside of the outer container. Outside cover-lifting mechanism enclosures shall be open base housings made from CRES of the same thickness as the outer container.

3.5.1.4.1 Foot pedal. The foot pedal shall be formed from not less than 3/64-inch thick CRES. Overall dimensions shall be not less than 1-1/4 inches wide by 1-3/4 inches long, elliptically shaped or flat with the edges turned down. Overall-finished thickness shall be not less than 1/2-inch. Attachment to the cover-lifting mechanism shall be by welding or other equally permanent method.

3.5.1.5 Inner container. The inner container shall be seamlessly drawn from one piece of CRES and shall not be reduced to less than 0.030-inch thick at any point. It shall be formed with well-rounded corners on the bottom to facilitate cleaning. The top rim shall have a bead rolled to the outside surface.

3.5.1.5.1 Inner container support lugs. The inner container shall be provided with 2 support lugs. Each lug shall be fabricated from 2 pieces of 5/8-inch CRES strip not less than 0.070-inch thick joined by 2 spot welds. Attachment to the inner container shall be as shown on figure 1.

3.5.1.5.2 Inner container bail. The inner container bail shall be fabricated to dimensions shown on figure 1 from 3/4-by 1/16-inch CRES. Four inches of resilient rubber tubing made from material specified in 3.3.2 shall be centrally located on the bail. Bail assembly to the inner container support lugs shall be by means of rivets inserted through holes provided in the inner container support lugs and bail. Rivets shall be securely upset against the inner container support lug offsets. The assembled bail shall fall free to either side of the waste receptacle when released from the lifting position.

3.5.2 Grade B waste receptacle.

3.5.2.1 Dimensions. The capacity of the inner container and the overall height of the complete waste receptacle shall be as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Capacity and overall height of receptacle, grade B

Size	Capacity inner container (minimum) 1	Overall height of receptacle (maximum)
	Gallons	Inches
1.....	3	17
2.....	3-1/2	19
3.....	5	21

1 The maximum capacity allowed in regular manufacturing practice shall be permitted.

3.5.2.2 Outer container. The body of the outer container shall be formed from one or two pieces of sheet steel having vertical lock seam or seams. The thickness of sheet steel for sizes 1 through 3 shall be 0.0179-inch (26 gauge). The outer container shall form a rigid supporting shell for the inner container. Upper and lower rims shall be rolled so as to conceal the sheet-metal edges.

3.5.2.2.1 Inner container support. The outer container shall support the inner container by one of the following methods, to the extent specified below:

(a) Supporting metal bridge.
(b) Supporting metal plates.
(c) Bottom closure of metal for size 3. (Use on sizes 1 and 2 only when specified) (see 6.2).
(d) Top edge of the outer container rolled to the inside to support and center the inner container without the need for methods a, b, or c above.

3.5.2.2.2 Rubber feet. When specified (see 6.2), outer containers shall be equipped with not less than 4 rubber feet made from material specified in 3.3.2. Attachment shall be to metal plates or rods riveted or welded to the outer container.

3.5.2.2.3 Outer container bail. Size 3 outer containers shall be equipped with a permanently attached steel bail. Unless otherwise specified (see 6.2), sizes 1 and 2 shall be similarly equipped with a steel bail. When released from the carrying position the bail shall fall free to either side of the container.

3.5.2.3 Cover. Thickness of sheet steel for covers shall be not less than 0.0179-inch (26 gauge). The rim of the cover shall be rolled to conceal the sheet-metal edges and shall be equipped with replaceable cushioning buttons or strips to support the cover when closed.

3.5.2.4 Cover hinge. Cover-hinge requirements shall be as specified in 3.5.1.3 except material shall be carbon steel.

3.5.2.5 Cover-lifting mechanism. Cover-lifting mechanism shall be as specified in 3.5.1.4 except material shall be carbon steel and enclosure requirements shall be as hereinafter specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5.2.5.1 Sizes 1 and 2. The cover-lifting mechanism for sizes 1 and 2 shall be either inside the outer container or inside an enclosure spot-welded to the outside of the outer container in accordance with 3.5.1.4, except material, or when specified (see 6.2) exposed on the outside of the outer container shall also be acceptable.

3.5.2.5.2 Size 3. The cover-lifting mechanism for size 3 shall be either inside the outer container or inside on enclosure spot-welded to outside of the outer container in accordance with 3.5.1.4.

3.5.2.5.3 Foot pedal. The foot pedal shall be either as specified in 3.5.1.4.1. or material may be nickel, chromium-plated steel, or carbon steel not less than 0.0359-inch thick (20 gauge) with a cap of CRES not less than 0.015-inch thick clinched on as an overlay.

3.5.2.6 Inner container. The inner container for all size receptacles shall be fabricated from carbon steel as specified in 3.3.1.1. not less than 0.0179-inch thick (26 gauge) or pregalvanized sheet steel as specified in 3.3.1.2 not less than 0.0217 inch thick (26 gauge). The wall shall be closed by a locked seam. The bottom panel shall be secured to the wall by a double-seamed joint. The open end of the inner container shall be rolled to the outside to conceal the sheet-metal edge. The difference in dimensions between the outside diameter of the inner container and the inside diameter of the outer container shall not exceed 3/4-inch.

3.5.2.6.1 Inner-container bail. Inner containers shall be provided with a permanently attached bail for lifting and removing the inner container. The bail shall be fabricated from steel wire, not less than 0.1205-inch diameter (11 gauge), or steel strip not less than 0.050-inch thick by 1/2-inch wide. If the ends of the bail are looped around the rolled rim of the inner container, the inner container rim shall be rolled over not less than 0.090-inch diameter wire. When the attached bail is released from the carrying position, it shall fall free to the rim of the inner container and shall not obstruct the opening for waste disposal.

3.6 Finish.

3.6.1 Grade A waste receptacle. All visible exterior surfaces of the assembled outer container, including the underside surface of the cover, shall have a No. 4 commercial finish.

3.6.2 Grade B waste receptacles.

3.6.2.1 Outer container. The outside surface of the outer container and the inside and outside surfaces of the cover shall have a high-gloss-enamel finish in the color specified (see 1.2.2 and 6.2). The inside surface of the outer container shall be finished in accordance with the manufacturer's standard practice. Exterior surfaces shall be free from runs and unevenly coated areas. Exposed lifting mechanism members, except the foot pedal (see 3.5.2.5.3), shall have a finish identical with the outer container. There shall be no pictorial markings or designs visible on any surfaces. When tested as specified in 4.4.3, the enamel shall not chip or flake and base-metal exposure shall be limited to the sharp line left by the knife blade. In the event the test in 4.4.3.1 is required, the enamel on the outside of the bend shall not crack or fracture.

3.6.2.1.1 Outer-container bail. The outer-container bail, when applicable, shall be chromium or nickel plated in accordance with the manufacturer's regular commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.6.2.2 Inner container. The inner containers shall be uniformly and completely zinc-coated or poreclain enameled.

3.6.2.2.1 Zinc coating. When the material for inner containers conforming to 3.3.1.1 is zinc-coated, the coating shall be in accordance with ASTM A153.

3.7 Marking for identification.

3.7.1 Civil agencies. When required, marking shall be as specified (see 6.2).

3.7.2 Military agencies.

3.7.2.1 Grade A receptacles. Unless otherwise specified (see 6.2), outer and inner containers shall contain the following information:

Federal stock number.
Name or registered trademark of the manufacturer.
Contract number.
Medical services symbol in accordance with type III of MS 16686.

Marking for identification shall be accomplished by legibly and permanently stamping or embossing the required information. Impressions shall be of uniform depth and shall not penetrate the inner or outer surfaces of the containers. Decalcomanias shall not be used.

3.7.2.2 Grade B receptacles. The requirements of 3.7.2.1 shall apply except that the letters "U.S" shall be shown in place of the medical services symbol. Unless otherwise specified (see 6.2), the mark shall be legible and permanently stamped or embossed on the cover or by a decalcomania on the outside bottom of the inner container.

3.8 Workmanship. The finished waste receptacles shall be clean, well made, and free from any defects that affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample testing. When required, testing of the preproduction sample shall be made of a completely fabricated waste receptacle for all provisions of this specification applicable to end product performance tests.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.3.2 End-item inspection.

4.3.2.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects and acceptable quality levels (AQL's) set forth below. The lot size shall be expressed in units of waste receptacles for the purposes of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one (1) completely fabricated waste receptacle.

Examine	Defect	Classification	
		Major	Minor
Finish	Not as specified.....		X
Grade A (inner & outer container)	Scratches, gouges, machine or forming marks.....		X
Grade B (outer container)	Omitted or area of no finish....	X	
	Not color specified or high gloss.....		X
	Discoloration or foreign matter imbedded in finish.....		X
	Not adherent, e.g., flakes off easily.....	X	
	Rusted scratched, or abraded area.....	X	
	Not continuous, smooth coat, i.e., sags, runs, drips, laps, creeps, bubbles, streaks, wrinkles, blisters, cracks, or orange peel.....		X
	Pictorial markings or designs...		X
Outer container, bail and foot pedal when applicable	Not chrome or nickel plated.....		X
	Unplated area.....		X
	Not adherent, i.e., peeling flaking or blisters.....		X
	Stained spots, thin, or dull areas.....		X
Inner container	Not zinc coated or porcelain enameled.....	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Inner container when porcelain enameled	Chipping, cracks, blisters or scumming	X	
	One or more lumps on surface		X
	Beads or drips on edges		X
	Crazing, fish scaling, star marks, hairlines or copper head affecting appearance		X
	Tearing (curling or crawling), scale	X	
Inner container, when zinc coated	Area or no coating	X	
	Coating not adherent, i.e., flaking or peeling	X	
	Blisters, lumps, gritty areas, acid spots, dross warts, flux, and excess zinc on edges		X
Construction and workmanship	Not one piece construction		X
Grade A Outer container	No vertical lock seam or spot-welded lap-seam at rear	X	
	Upper-rim bead not rolled tight against inside or outside surface		X
	Bottom-edge bead not rolled tight against inside surface		X
	Suspension slots omitted from upper rim	X	
	Inside wall not braced as specified	X	
	Brace does not clear bottom of inner container	X	
Cover silencer	Missing or mislocated		X
Inner container retaining lug	Missing or mislocated	X	
	Not secured as specified	X	
	Does not lock inner container within the outer container when lid is in closed position		X
	Receptacle not capable of being carried by the bail as a complate unit without lifting the cover		X
	Does not clear rim of inner container when pressure is exerted on the pedal of the cover-lifting mechanism	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Inner container retaining lug (con.)	Inner container is not removable from outer container without interference when cover is in open position.....	X	
Cover hinge for grades A and B	Positioning interferes with the suspension or removal of the inner container.....	X	
	Not secured as specified.....		X
	Lateral motion of the hinge pin and cover.....		X
	Thrust members omitted.....	X	
Cover-lifting mechanism	Missing or mislocated.....	X	
	No means provided for engaging cover hinge thrust members.....	X	
	Vertical lifting mechanism components not enclosed as specified.....		X
	Outside cover-lifting mechanism enclosure not open-based housing as specified.....		X
Foot pedal	Not eliptically shaped or flat with edges turned down.....		X
	Not attached as specified.....		X
Inner container	Not fabricated as specified.....	X	
	Corners not well rounded.....		X
	Top-rim bead not rolled to outside surface.....		X
Inner container support lugs	Missing or mislocated.....	X	
	Not secured as specified.....		X
Inner container bail	Rubber tubing omitted or mislocated.....		X
	Not secured to inner container as specified.....		X
	Rivets not securely upset against container support lug-off sets.		X
	Does not fall free to either side of waste receptacle when released from the lifting position.....		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Grade B outer container	No vertical lock seam or seams..	X	
	Upper and lower rims not rolled.		X
Inner container support	Not as specified.....	X	
Rubber feet	Missing or not number required..		X
	Not secured as specified.....		X
Outer container bail	Missing or not securely attached	X	
	Does not fall free to either side of container when released from carrying position..		X
Cover	Rim not rolled or not equipped with replaceable cushioning buttons or strips.....		X
Cover-lifting mechanism	Missing or mislocated.....	X	
	No means provided for engaging cover hinge thrust members.....	X	
	Vertical lifting mechanism components not enclosed as specified (when required).....		X
Inner container	Body not closed by locked seam..	X	
	Bottom not secured to body by a double-seamed joint.....	X	
	Top rim not rolled to outside...		X
Inner container bail	Missing or not securely attached	X	
	Does not fall free to either side of container when released from carrying position.....		X
	Bail ends not looped over wire reinforced rolled rim, when applicable.....		X
Marking for identification Grade A container	Missing, not permanent, illegible, incorrect, mislocated or decalcomania used.....		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Marking for identification Grade B	Stamped or embossed; missing, not permanent, illegible, incorrect or mislocated.....		X
	Decalcomania used; missing, illegible, incorrect, mislocated, defaced, loose edges, air-pockets or creases.....		X

4.3.2.2 Dimensional examination. Inspection shall be made of waste receptacles for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect.

4.3.2.3 Inspection levels and AQL's. The acceptable quality levels (AQL's), expressed in defects per hundred units, and inspection levels shall be as follows:

For examination in	Inspection Levels	AQL's	
		Major	Total
4.3.2.1	II	2.5	6.5
4.3.2.2 (1 Class)	S-2	---	4.0

4.3.2.4 Testing of the end item. Tests shall be performed as indicated below for the characteristics specified therein. The inspection levels applicable to each lot or batch shall be as indicated with no indication of failure.

Characteristics	Reqmt. par.	Test method	Insp. level
Cover operation...	3.5	4.4.1	S-2
Leak test.....	3.5	4.4.2	S-2
Enamel adhesion, outer container and cover.....	3.6.2.1	4.4.3	S-2

4.3.3 Examination of preparation for delivery. An examination will be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects will be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Examination	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequece or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, bulging or distortion of containers. Strapping, sealing, braces, blocking, and cushioning inadequate improper, or missing; closures improperly affixed; components improperly secured.
Contents	Number per container is more or less than required.

4.4 Tests.

4.4.1 Cover operation. With the waste receptacle on a level floor surface, the cover shall be opened and closed not less than 50 times in a period not exceeding 2 minutes. Opening and closing shall be accomplished by applying normal foot pressure to the foot pedal with the heel of the foot resting on the floor. Examination shall be made to determine compliance with 3.5.

4.4.2 Leak test. Inner containers shall be filled with clear water to within one inch of the top and allowed to stand for 24 hours on a dry surface to determine compliance with 3.5.

4.4.3 Enamel adhesion; outer container and cover. Draw the point of a sharp knife across the enamel finish penetrating to the base metal over any portion of the inside or outside surfaces to determine compliance with 3.6.2.1.

4.4.3.1 Umpire test. If the test in 4.4.3 is inconclusive, two specimens from the outer container and one specimen from the cover shall be bent 180 degrees around a 1/4-inch diameter steel rod to determine compliance with 3.6.2.1.

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civilian procurements.)

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each removable inner container shall be blocked and cusioned to prevent movement within the outer container with pads or strips made of corrugated fiberboard or cushioning material secured in place with tape conforming to PPP-T-45. Each receptacle shall than be packaged in a snug-fitting end-opening fiberboard box conforming to style RSC, type CF, class domestic of PPP-B-636, except that the minimum bursting strength of the fiberboard shall be 200 p.s.i. The receptacle shall be immobilized within the fiberboard box to prevent movement while in transit or storage by means of die-cut pads or scored sheets made of the same material as the box. Each box shall be securely closed in accordance with the appendix of the box specification.

5.1.2 Level C. Waste receptacle shall be packaged in accordance with industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four receptacles of one grade, size, and color only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s, of PPP-B-636, except that dimensional and weight limitations shall be waived. Each fiberboard shipping container shall be waterproofed by means of tape or a case liner in accordance with the appendix of the container specification. Alternatively, shipping containers may be used that conform to overseas type of PPP-B-591 or PPP-B-601; class 2 of PPP-B-576; class 2, style 2 or 4 of PPP-B-621, except that requirements for additional battens or cleats shall not be required; or style 1, 2, or 2A, class 3 use, type 2 load of PPP-B-585. Each alternative shipping container shall be provided with a type I or II, grade B or C, class 2, sealed case liner conforming to MIL-L-10547. Closure and reinforcing with flat steel strapping or tape banding shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B. Four receptacles, of one grade, size, and color only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic of PPP-B-636, except that the minimum bursting strength of the fiberboard shall be 275 p.s.i. Closure of the fiberboard shipping container shall be in accordance with the appendix of the container specification. Alternatively, shipping containers may be used that conform to domestic type, style A or B, of PPP-B-591, or PPP-B-601; class 1 of PPP-B-576; class 1, style 2 or 4 of PPP-B-621; or style 1, 2, or 2A, class 1 use, type 2 load of PPP-B-585.

5.2.3 Level C. Waste receptacles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The receptacles covered by this specification are intended for temporary disposal of waste in kitchens, hospitals, offices, public buildings, and laboratories.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Grade, size, and color (when applicable) of receptacle required (see 1.2.1 and 1.2.2).
(c) When preproduction sample is required (see 3.2).
(d) When bottom closure for the grade B, size 1 and 2 outer container is required (see 3.5.2.2.1).
(e) When rubber feet for grade B receptacles are required (see 3.5.2.2.2).
(f) When the carrying bail of the outer container of sizes 1 and 2, grade B is not required (see 3.5.2.2.3).
(g) When exposed lifting mechanism is acceptable for sizes 1 and 2, grade B (see 3.5.2.5.1).
(h) Civil agency marking requirements, when required (see 3.7.1).
(i) When marking requirements for grade A are modified (see 3.7.2.1).
(j) When identification marking for grade B is not required, (see 3.7.2.2).
(k) Selection of the applicable level of packaging and packing (see 5.1).

"DOD coordination has been waived"

Preparing activity:

GSA-FSS

(Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSH), Wash., D.C. 20406.
NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

RR-W-75B - Waste Receptacle, Step-On Type

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

GSA DC 69-9761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FORM GSA FEB 69 2200