INCH-POUND
MIL-PRF-27/26A
23 September 2009
SUPERSEDING
MIL-PRF-27/26
4 September 1975

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, 3.0 VOLT-AMPERES, 400 HZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-27.

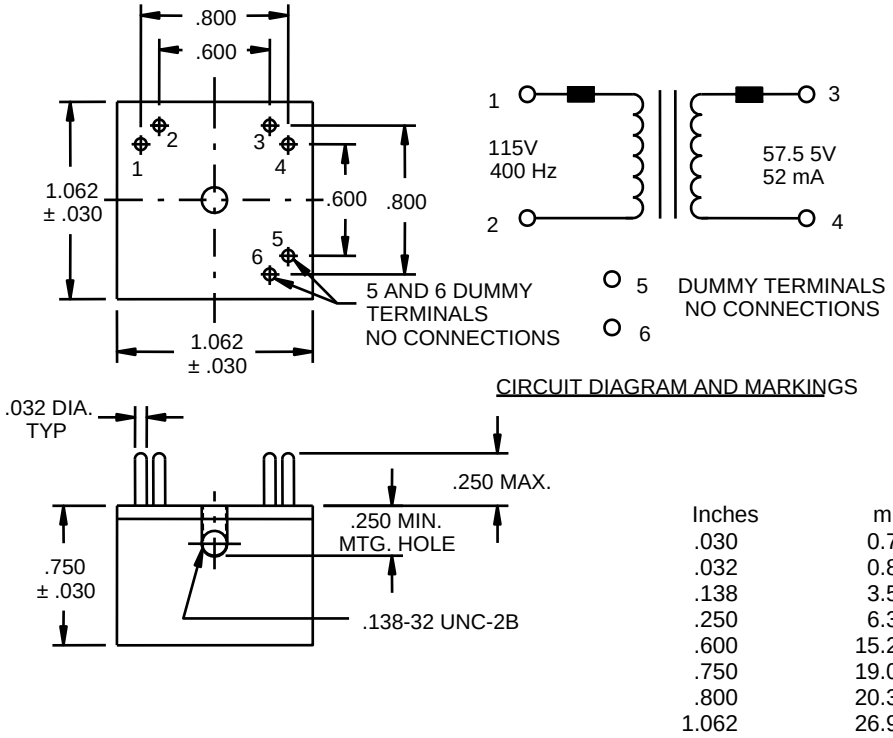

Inches	mm
.030	0.76
.032	0.81
.138	3.51
.250	6.35
.600	15.24
.750	19.05
.800	20.32
1.062	26.97

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.015 (0.38 mm).
4. Marking shall be on the top of the case.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses i.e. (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage: (1-2) 115 volts, 400 Hz ±1 percent.

Secondary current: (3-4) 52 mA.

Secondary voltage: (3-4) 57.5 volts.

Working voltage: (3-4) 325 volts peak.

VA ratings: 3.0 volt-ampere.

Design, configuration, and physical dimensions: See figure 1.

Duty cycle: Continuous.

Case: Molded.

Material: Diallyl-phthalate (GDI-30F).

Terminals: Pin type, brass-hot solder dip.

Height: .25 inch (6.35 mm) maximum.

Weight: 47 grams, maximum.

Operating temperature range: -55˚C to +170˚C.

Altitude: 70,000 feet, maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage:

At sea level: 910 volts rms.

At reduced barometric pressure (70,000 feet): 407 volts rms

Electrical characteristics:

No load: With 115 volts, 400 Hz across (1-2), the current in (1-2) shall not exceed 6.0 mA maximum.

Rated load: With 115 volts, 400 Hz across (1-2) and a 52 mA load in (3-4), the voltage across (3-4) shall be 57.5 volts ±3 percent.

Efficiency: 75 percent minimum at rated load.

Temperature rise: 20°C maximum.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/26-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:12Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202

Custodians:
Army - CR
Navy - EC
Air force – 85
DLA – CC

Preparing activity:
DLA - CC

(Project: 5950-2009-030)

Review activities:
Army – AR, CR4
Navy – AS, MC
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:12Z
Check the source to verify that this is the current version before use.