
NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TF5R21ZZ315

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

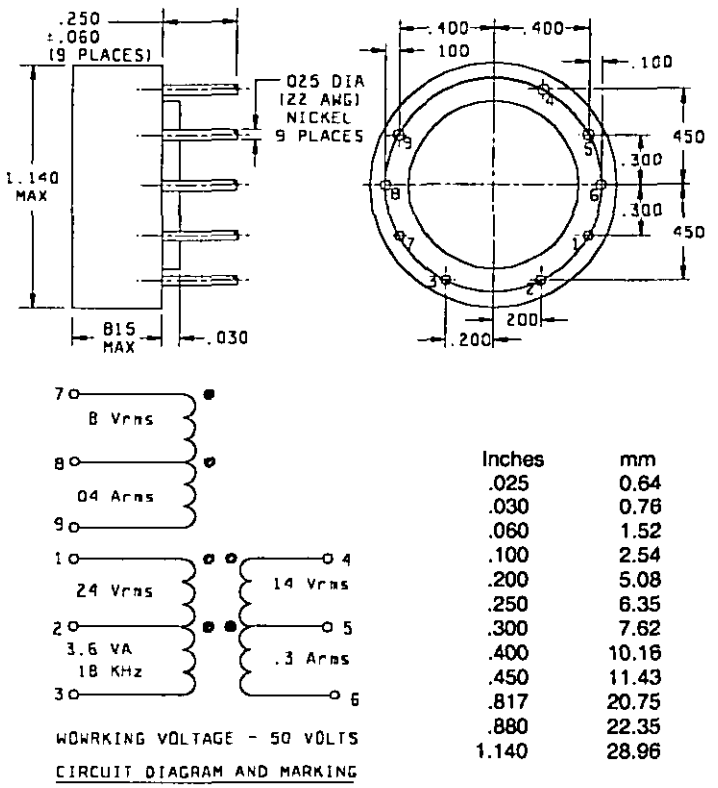

Inches	mm
.025	0.64
.030	0.76
.060	1.52
.100	2.54
.200	5.08
.250	6.35
.300	7.62
.400	10.16
.450	11.43
.817	20.75
.880	22.35
1.140	28.96

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e., (1-3) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings

Primary voltage

(1-3) 24 volts CT, 18 kHz.

Primary current

(1-3) .15 ampere rms.

Secondary voltage

(4-6) 14 volts rms CT.

(7-9) 8 volts rms CT.

Secondary current

(4-6) .3 ampere rms.

(7-9) 04 ampere rms

Working voltage 50 volts

Design and construction

Dimensions and configuration See figure 1.

Duty cycle Continuous.

Case Encapsulated.

Material Diallyl phthalate, MIL-M-14, type SDG.

Terminals Nickel, pin type

Terminal height .250 ±.060.

Weight 4 ounces.

Altitude

Operating 10,000 feet.

Nonoperating 40,000 feet

Operating temperature range -55°C to +105°C.

Maximum operating temperature 105°C (ambient plus temperature rise).

Temperature rise 20°C with 24 volts, 18 kHz across (1-3) at an ambient temperature of 85°C.

Terminal strength Method 211 of MIL-STD-202, test condition A, 2 pounds.

Dielectric withstanding voltage (at sea level). 500 volts rms (1-3) (4-6) (7-9).

Insulation resistance Method 302 of MIL-STD-202, test voltage, 100 volts dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:13Z
Check the source to verify that this is the current version before use.

Electrical characteristics

No load With 24 volts, 18 kHz across (1-3)

Current in (1-3) .15 ampere maximum

Voltage across (4-6) 14.6 V maximum.

Voltage across (7-9) 8.4 V maximum

Rated load With 24 volts, 18 kHz across (1-3)

Current in (4-6) .3 ampere maximum

Voltage across (4-6) 14 V ±2 percent.

Current in (7-9) .04 ampere maximum.

Voltage across (7-9). 8 V ±2 percent.

Polarity Terminals 1, 4, and 7 shall be of the same instantaneous polarity.

Marking location See figure 1.

Part number M27/29-01.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Air Force - 11, 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent.
DLA - ES

(Project 5950-0683-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:13Z
Check the source to verify that this is the current version before use.