
INCH-POUND
MIL-PRF-27/40C
W/AMENDMENT 3
24 March 2022
SUPERSEDING
MIL-PRF-27/40C
W/AMENDMENT 2
10 July 2020

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, 3 VOLT AMPERES, 400 HZ ELECTROSTATIC SHIELDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-PRF-27.

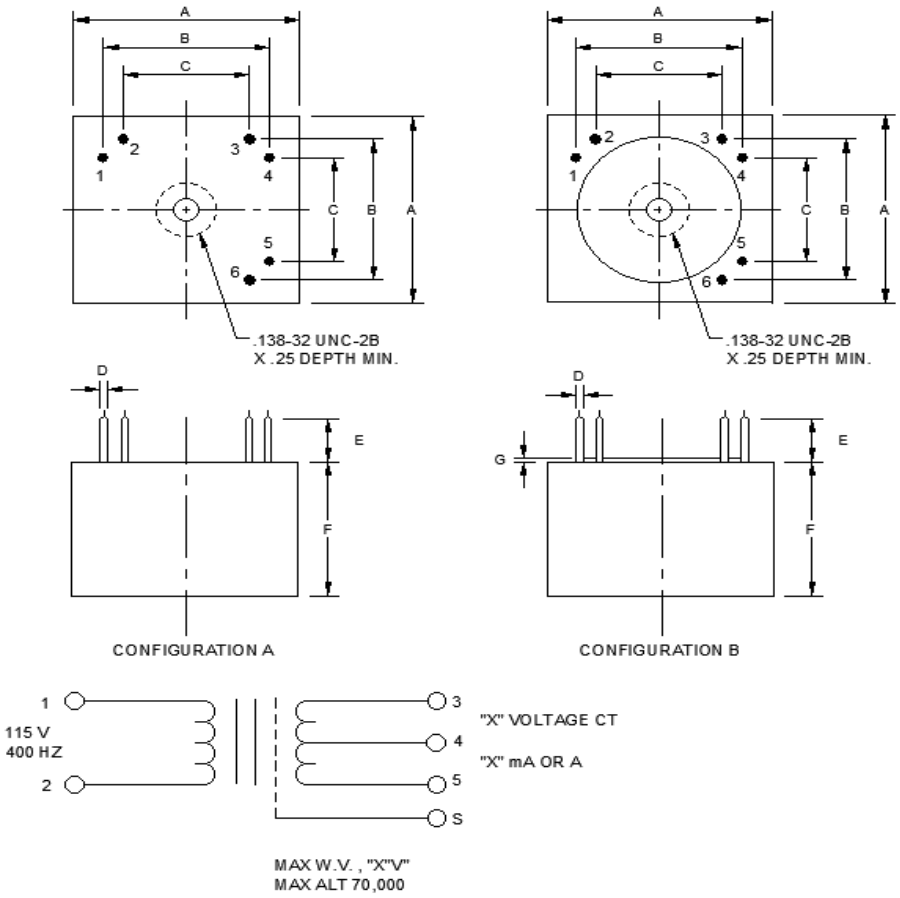

(SEE TABLE I FOR VALUE OF "X")
CIRCUIT DIAGRAM AND MARKING

FIGURE 1. Dimensions and configurations

AMSC N/A FSC 5950
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:15Z
Check the source to verify that this is the current version before use.

Dim	Inches	Millimeters
A	1.09 Max	27.2
B	.800	20.32
C	.600	15.24
D	.032 ±.002	0.81 ±0.05
E	.25 .13	6.4 3.3
F	.78 Max	19.8
G	.03 .02	0.8 0.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.005 (0.13 mm).
4. Marking shall be on the side of the case.
5. A white dot shall be marked on the side opposite the terminals, over terminal 1, in addition to the terminal marking shown.
6. Secondary electrical values shall be marked as specified in table I, as applicable.

FIGURE 1. Dimensions and configurations – continued.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings: See table I.

Primary voltage (1-2): 115 volts ±10 percent, 400 Hz ±5 percent.

Design and construction:

Dimensions and configuration: See figure 1.

Weight: 1.65 ounces, maximum.

Duty cycle: Continuous.

Case: Plastic encapsulated.

Material: Plastic.

Altitude: 70,000 feet, maximum.

Operating temperature range: -55˚C to +130˚C, maximum.

Terminals: Printed circuit pins – tinned brass.

Terminal strength: MIL-STD-202-211, test condition A, 2 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:15Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage:

At sea level: 2.8 times the maximum working voltage specified in table I.

At reduced barometric pressure: 1.25 times the maximum working voltage specified in table I.

Electrical characteristics:

No load: With 115 volts rms, 400 Hz across (1-2): Current in (1-2) shall not exceed 6 mA rms.

Rated load: With 115 volts, 400 Hz across (1-2) and a resistive load with current as specified in table I in (3-5), the voltage across (3-5) shall be as specified in table I.

Efficiency: 75 percent minimum at rated load.

Electrostatic shielding: The voltage ratio shall be a minimum of 5 to 1 at 20 kHz.

Polarity: Additive with terminals 2 and 3 connected.

Regulation: $\frac{\text{Voltage (no Load) - Voltage (rated load)}}{\text{Voltage (rated load)}} \times 100$

shall not exceed 12 percent.

Phase shift: 1.0 electrical degree between primary and secondary voltage at rated load, maximum.

Temperature rise: 20˚C, maximum.

Vibration: MIL-STD-202-204, test condition D.

Marking location: See figure 1.


VERIFICATION

Extent of qualification

Qualification testing and approval to M27/37-44 A or B, M27/42-44 A or B, and M27/46-44 A or B shall be sufficient to grant qualification approval to MIL-PRF-27/37 through MIL-PRF-27/47 inclusive, all parts.

Qualification testing and approval to M27/40-44 shall be sufficient to grant qualification approval to M27/40-01 through M27/40-44.

Part or Identification Number (PIN): M27/40-01 A or B.

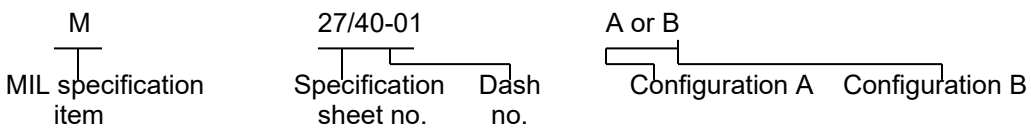

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Dash No.	Type Designation	Secondary voltage (3-5) (V rms) ±3%	Secondary current (3-5) (amps rms)	Working voltage (V rms) (MAX)
01 A or B	532	6	0.500	325
02 A or B	533	6.3	0.476	325
03 A or B	534	7	0.429	325
04 A or B	535	7.5	0.400	325
05 A or B	536	8	0.375	325
06 A or B	537	9	0.333	325
07 A or B	538	10	0.300	325
08 A or B	539	11	0.273	325
09 A or B	540	12	0.250	325
10 A or B	541	12.6	0.238	325
11 A or B	542	13	0.231	325
12 A or B	543	15	0.200	325
13 A or B	544	16	0.188	325
14 A or B	545	18	0.167	325
15 A or B	546	20	0.150	325
16 A or B	547	22	0.136	325
17 A or B	548	24	0.125	325
18 A or B	549	26	0.115	325
19 A or B	550	28	0.107	325
20 A or B	551	30	0.100	325
21 A or B	552	33	0.091	325
22 A or B	553	36	0.083	325
23 A or B	554	39	0.077	325
24 A or B	555	43	0.070	325
25 A or B	556	47	0.064	325
26 A or B	557	51	0.059	325
27 A or B	558	56	0.054	325
28 A or B	559	62	0.048	325
29 A or B	560	68	0.044	325
30 A or B	561	75	0.040	325
31 A or B	562	82	0.037	325
32 A or B	563	91	0.033	325
33 A or B	564	100	0.030	325
34 A or B	565	110	0.027	325
35 A or B	566	115	0.026	325
36 A or B	567	120	0.025	325
37 A or B	568	130	0.023	325
38 A or B	569	150	0.020	325
39 A or B	570	180	0.017	325
40 A or B	571	200	0.015	440
41 A or B	572	220	0.014	440
42 A or B	573	240	0.013	440
43 A or B	574	270	0.011	580
44 A or B	575	300	0.010	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:15Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-PRF-27/37,	MIL-PRF-27/38,	MIL-PRF-27/39,	MIL-PRF-27/41,
MIL-PRF-27/42	MIL-PRF-27/43,	MIL-PRF-27/44,	MIL-PRF-27/45,
MIL-PRF-27/46,	MIL-PRF-27/47	MIL-STD-202-204	MIL-STD-202-211

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5950-2022-020)

Review Activities:
Army – CR4, MI
Navy – AS, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:15Z
Check the source to verify that this is the current version before use.