
MILITARY SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, HERMAPHRODITIC, JAM-NUT MOUNTING, WITHOUT STRAIN RELIEF, 2 AND 4 POSITION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fiber optic connectors described herein shall consist of this specification and the latest issue of MIL-C-83526.

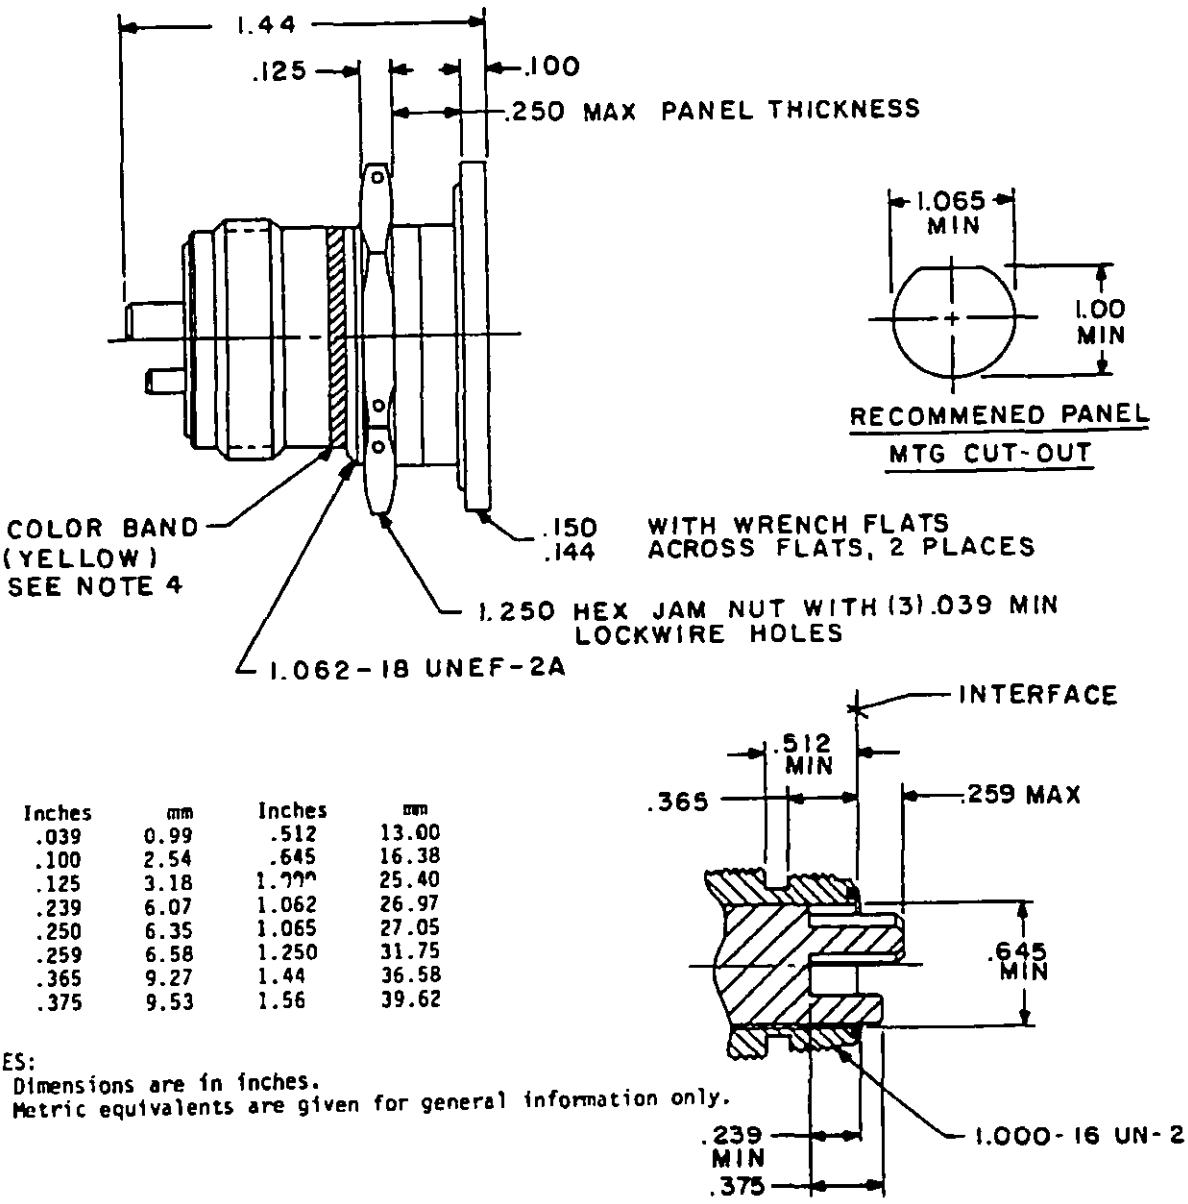


Inches	mm	Inches	mm
.039	0.99	.512	13.00
.100	2.54	.645	16.38
.125	3.18	1.000	25.40
.239	6.07	1.062	26.97
.250	6.35	1.065	27.05
.259	6.58	1.250	31.75
.365	9.27	1.44	36.58
.375	9.53	1.56	39.62

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.


FIGURE 1. Jam-nut connector.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check this source to verify that this is the current version before use.

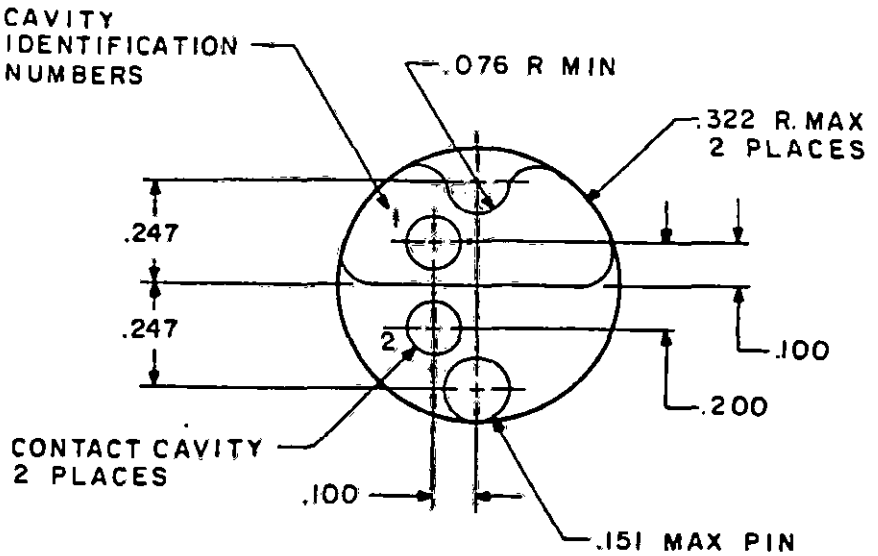

2 Termini connector type 11-01.

Inches	mm
.076	1.93
.100	2.54
.151	3.84
.200	5.08
.247	6.27
.322	8.18

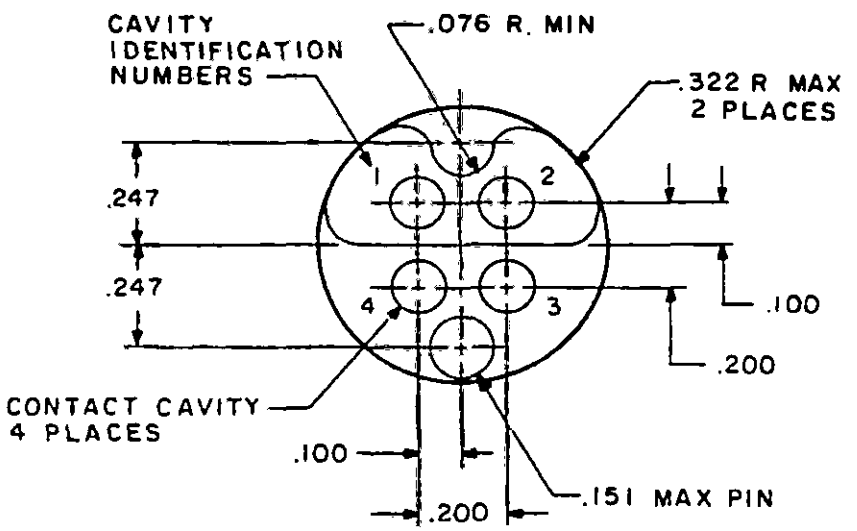

4 Termini connector type 11-02.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals, ±.03 (0.8 mm) for two place decimals, and ±.1 (2.5 mm) for one place decimals. Angular tolerances are ±0°30'.
4. The phrase 'Fiber Optic' must be included within the yellow band.
5. Unless otherwise indicated, dimensions are symmetrical about centerlines.

FIGURE 2. Termini configuration face view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1 and 2.

Weight: 4 ounces maximum.

Termini: The required number of termini shall be supplied with each connector unless otherwise specified (see table I). (For dummy terminus, see MIL-C-28876/18).

Coupling force: 11.0 pounds.

Coupling torques: 5 to 8 inch-pounds.

Materials: The material requirements are listed in table II.

Installation and removal tools: As specified by MIL-T-83523/5 through MIL-T-83523/8 and MIL-I-81969/46 through MIL-I-81969/48.

Fiber optic cable requirements: See DOD-C-85045.

Identification marking:

Part number: See table I.

Color bands: See EIA RS-359.

Part number M83526/11- (dash number from table I) (marked on flange of connector.)

TABLE I. Part numbers and characteristics.

Military part number M83526/11-	Insert arrangement	Termini supplied with connector
01A	2 termini insert	Yes
01B	2 termini insert	No
02A	4 termini insert	Yes
02B	4 termini insert	No

TABLE II. Material description.

Parts description	Material	Finish
O-Rings	Fluorosilicone rubber MIL-R-25988, type I, class 1	None
Dowel pin	CRES 303 Se condition A in accordance with ASTM A581 or A582	Passivated QQ-P-35
Compression nut	Aluminum alloy 2011-T3 QQ-A-225/3	Iridite in accordance with MIL-C-5541
Jam nut		Anodized MIL-A-8625, type II, class 2 Color: Gray
Insert		
Connector shell		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

For quality conformance and periodic inspection, dummy termini shall be used in all unused cavities.

Patent notice: The Government does not have a royalty free license under the following patent for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government.

US patent number	Patent date
3,994,564	30 November 1976
4,054,366	18 October 1977
4,060,308	29 November 1977

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Air Force - 11, 17, 19, 80, 84, 90, 99

User activities:
Navy - YD
Air Force - 13, 14, 82

Preparing activity:
Air Force 85

Agent:
DLA - ES

(Project 6060-0029-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.