MILITARY SPECIFICATION SHEET

MICROPHONE HEADSET
H182A/PT

This specification is approved for use within US Army Communications and Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the microphone headset described herein shall consist of this specification and the latest issue of MIL-H-83511.

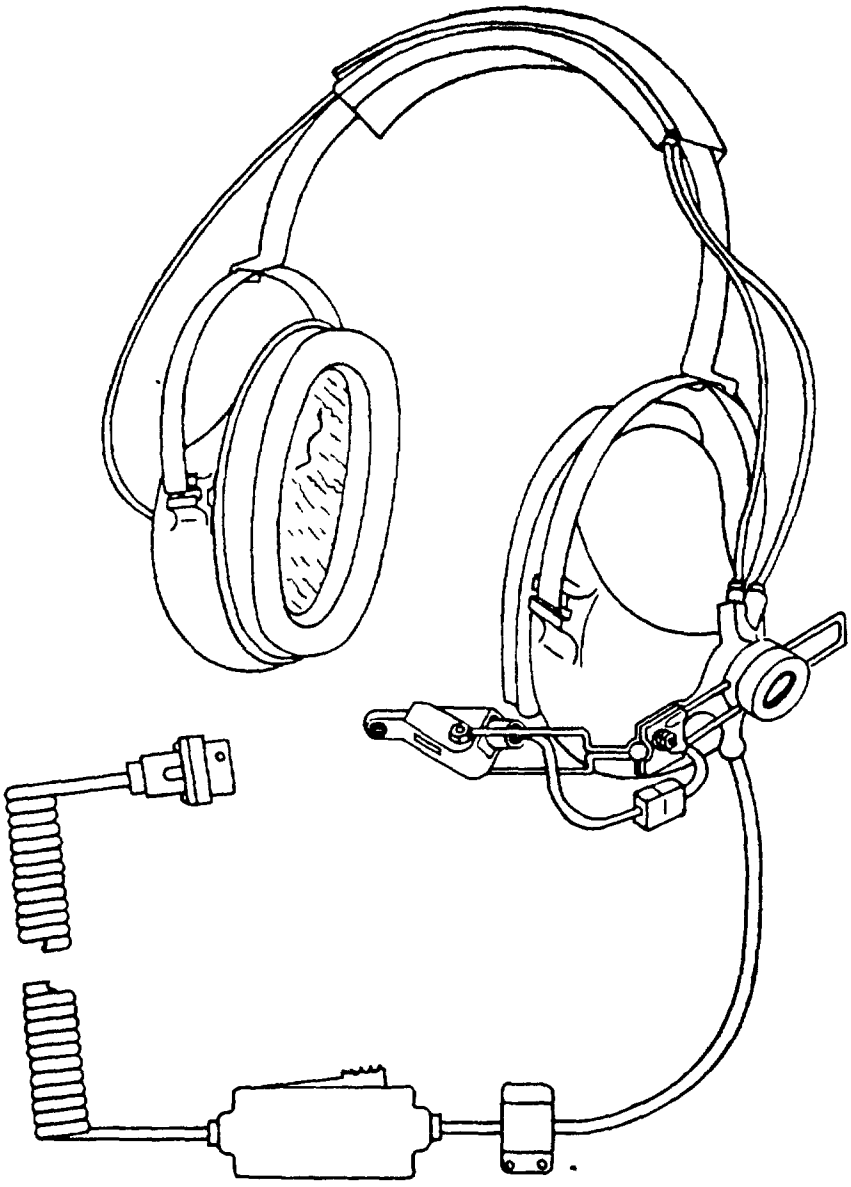


FIGURE 1. Microphone headset.

FSC 5965

DISTRIBUTION STATMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

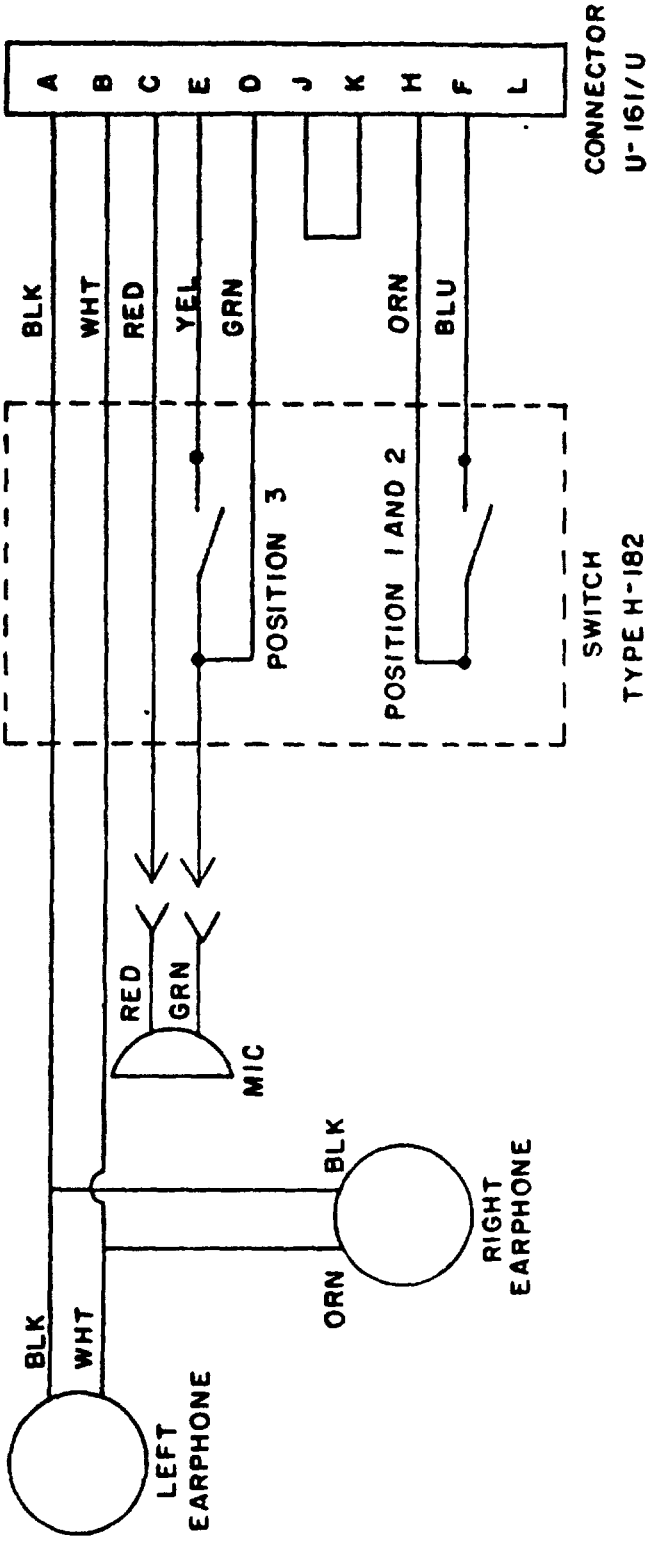


FIGURE 2 Wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

Design and construction: See figure 1.

Parameter applicability: Performance parameters shall be verified in accordance with table 1.

Earphone Element: Earphone Dynamic in accordance with MIL-E-25670, except:

1. Impedance - 300 ohm ±20%.

2. Waterproof to 3 feet of water.

Microphone:

Electret: Gentex Model 5075.

Sensitivity: -40 ±3 dB re 1V/Pascsal (300 ohm).

Supply voltage: 3 to 15 V dc.

Supply current: 6 ±2 mA at 3 V dc, 15 mA maximum at 15 V dc.

Weight: 15 gram maximum.

Cordage: In accordance with MIL-H-83511: Straight 4 conductor and retracted 7 conductor.

Schematic: See figure 2.

Switch: Bar actuated in accordance with MIL-H-83511.

Intended use: To be used with SB22 switch board.

Supercession data: The H-182A/PT supersedes the H-182/PT.

Qualification. The activity responsible for qualification of products delivered in accordance with this specification is the US Army Communication and Electronics Command, ATTN. AMSEL-ED-SC, Ft. Monmouth NJ 07703-5017. Information pertaining to qualification of products may be obtained from that activity. Qualification of product on the basis of similarity may be considered at the discretion of the qualifying activity on a case by case basis.

Sand and dust The headset-microphone in its normal operating configuration shall be placed in a test chamber, which has been vented to the atmosphere, with inside dimensions of 36 inches wide, 24 inches high and 18 inches deep, meeting the applicable requirements of MIL-C-9436. The headset-microphone shall show no evidence of sand and dust penetration and the individual frequency response of the microphone and earphone taken after the test shall not exceed 3 dB degradation from respective frequency response taken before the test.

Immersion: The headset-microphone in its normal operating configuration shall be subjected to immersion for 2 hours in 3 feet of fresh water at room temperature. The headset-microphone shall show no evidence of leakage when tested.

Blast: 30 rounds with a minimum peak pressure of 9.5 psi as provided in accordance with SK-W-864.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

TABLE I. Parameter applicability.

Inspection	Requirement paragraph	Test method paragraph	Number of samples	Qualification inspection	Quality assurance		
					Group A	Group B	Group C
Group I (Microphone)	3.1		3	X	X		
Group II (Earphones)	3.1		3	X	X		
Group III (Headset-microphones)			6				
Visual and Mechanical	3.1, 3.3, 3.4, 3.5, 3.7, 3.8			X	X		
Sound attenuation	3.6.3.1	4.8.4.1		X			
Talk	3.6.3.2	4.8.4.2		X	X		
Slide adjustment	3.6.3.3	4.8.4.3		X		X	
Strain relief	3.6.3.4	4.8.4.4		X		X	
Random drop	3.6.3.5	4.8.4.5		X		X	
Speech Intelligibility	3.6.3.13	4.8.4.13		X			X
Group IV			3				
Sand and dust	This document			X			X
Fungus	3.6.3.6	4.8.4.6		X			X
Vibration	3.6.3.7	4.8.4.7		X			X
Temperature	3.6.3.8	4.8.4.8		X			X
Temperature shock	3.6.3.9	4.8.4.9		X			X
Humidity	3.6.3.10	4.8.4.10		X			X
Shock	3.6.3.11	4.8.4.11		X			X
Salt fog	3.6.3.12	4.8.4.12		X			X
Immersion	This document			X			X
Gunblast	This document			X			X
Group V (Switch)			3				
Life	3.6.4.1	4.8.5.1		X			X
Actuator force	3.6.4.2	4.8.5.2		X		X	
Contact resistance	3.6.4.3	4.8.5.3		X		X	
(Cable)							
Flexing life	3.6.5.1	4.8.5.4		X			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

Custodian.
Army - CR

Preparing activity:
Army - CR

(Project 5965-A189)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.