METRIC

MIL-DTL-83527/2C
13 January 2004
SUPERSEDING
MIL-C-83527/2B
8 June 1992

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUIOS OPERATING TEMPERATURE, SHELL SIZE 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83527.

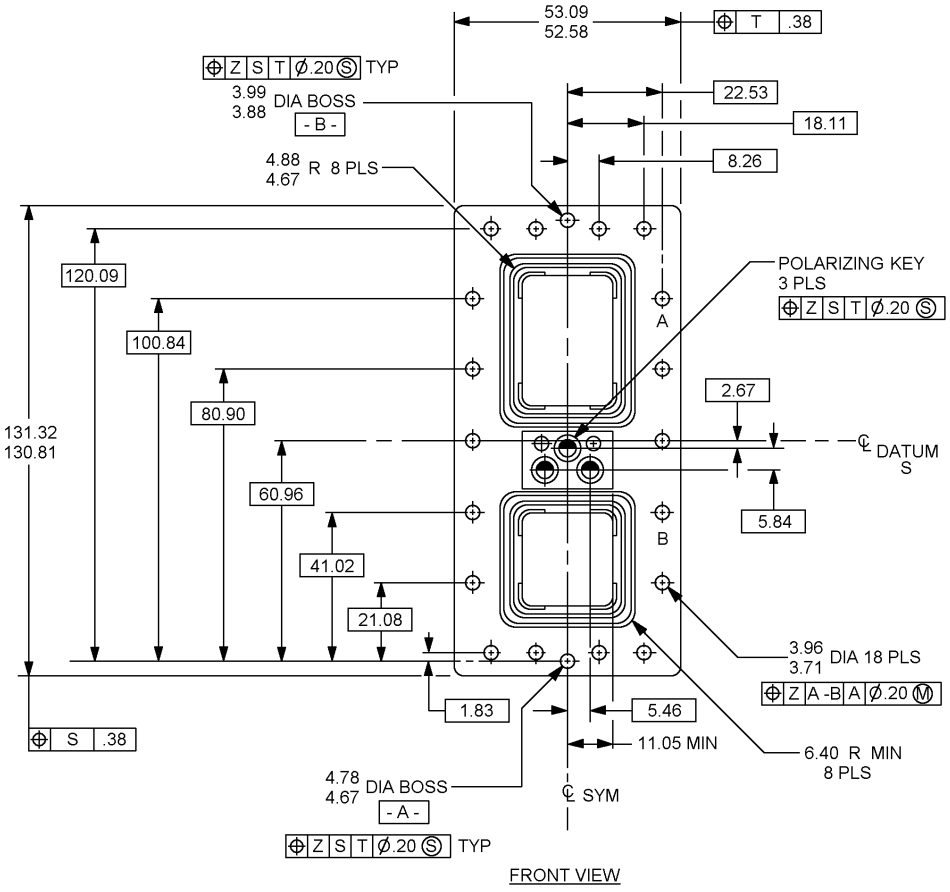


FIGURE 1. Connector, receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

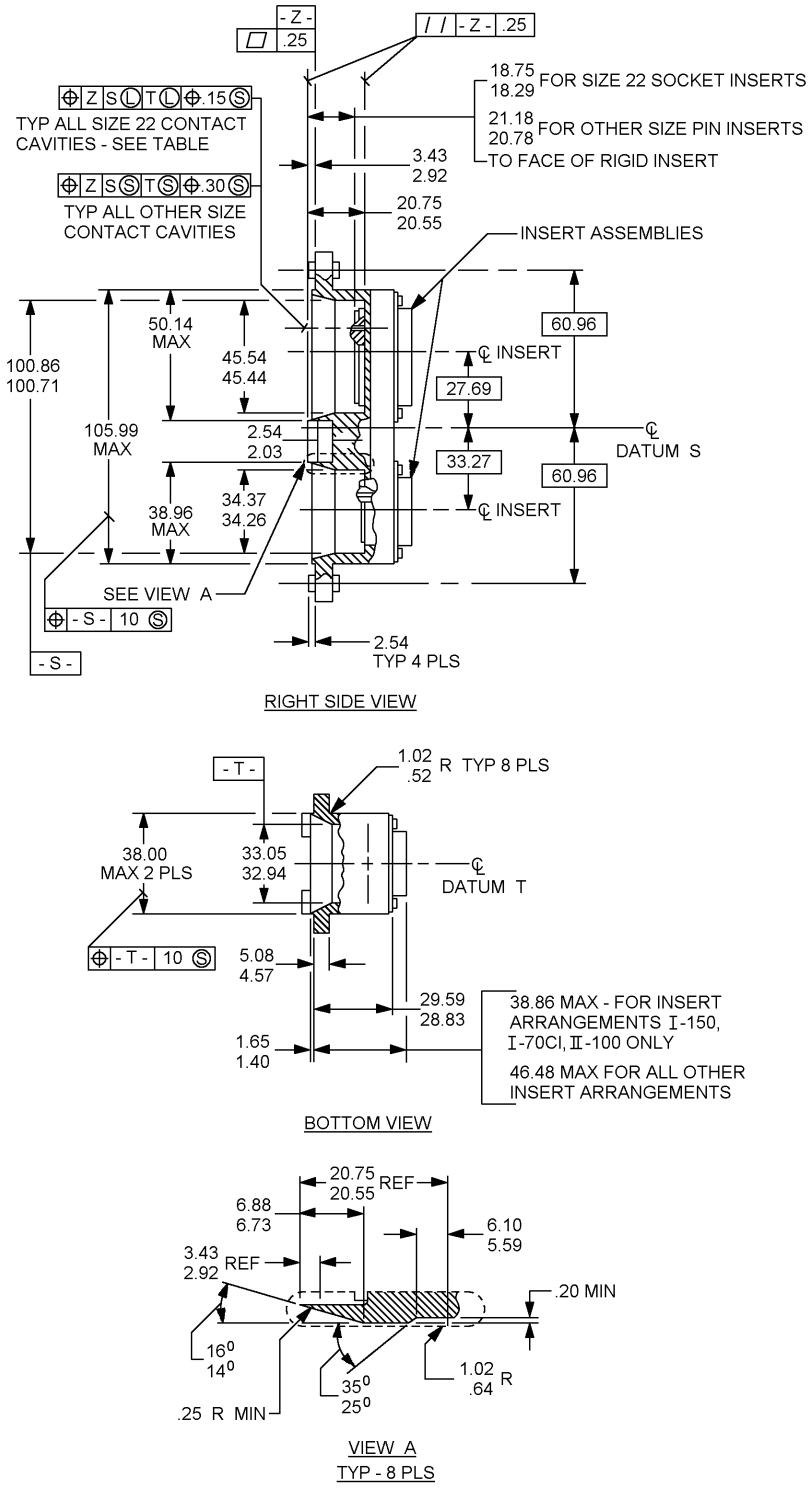


FIGURE 1. Connector, receptacle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

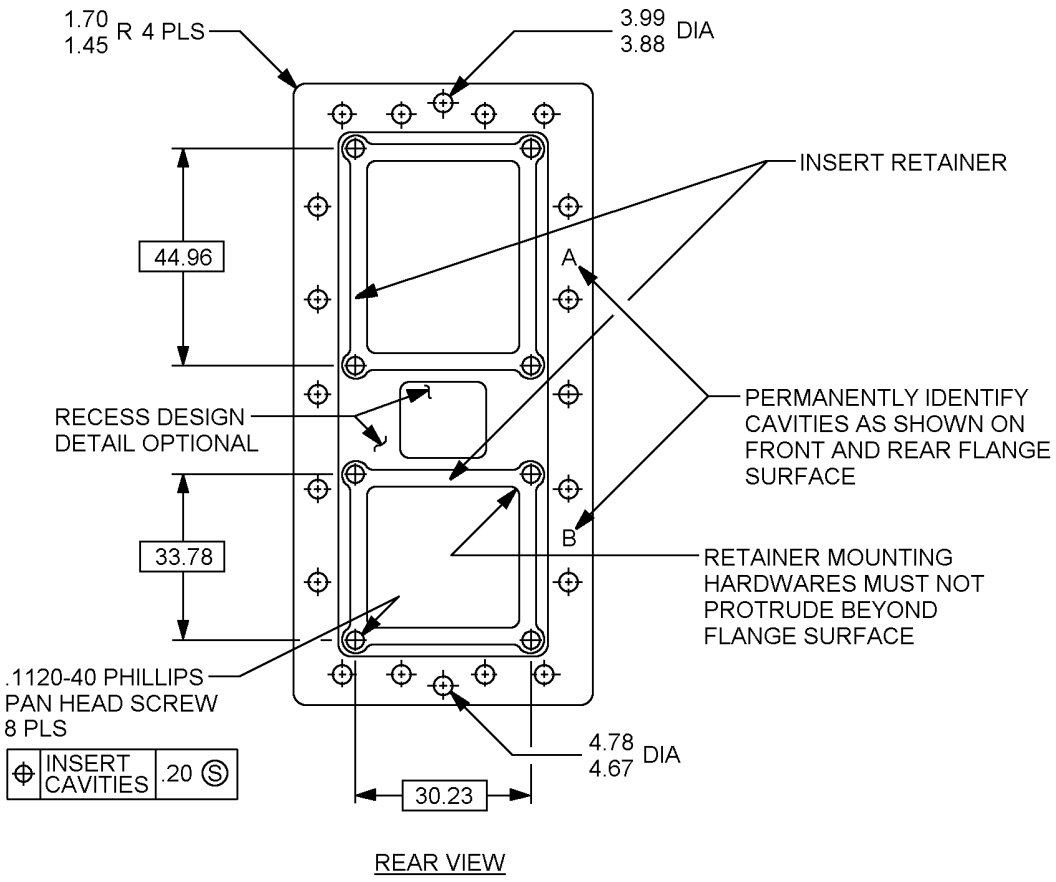


FIGURE 1. Connector, receptacle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100.71 (3.965)	100.74 (3.966)	100.76 (3.967)
32.94 (1.297)	0.30 (.012)	0.30 (.012)	0.30 (.012)
32.97 (1.298)	0.28 (.011)	0.28 (.011)	0.28 (.011)
32.99 (1.299)	0.25 (.010)	0.25 (.010)	0.25 (.010)
33.02 (1.300)	0.25 (.010)	0.23 (.009)	0.23 (.009)
33.05 (1.301)	0.20 (.008)	0.20 (.008)	0.20 (.008)
100.79 (3.968)	100.81 (3.969)	100.84 (3.970)	100.86 (3.971)
Datum S			
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.25 (.010)	0.23 (.009)	0.23 (.009)	0.20 (.008)
0.23 (.009)	0.23 (.009)	0.20 (.008)	0.18 (.007)
0.23 (.009)	0.20 (.008)	0.18 (.007)	0.18 (.007)
0.20 (.008)	0.18 (.007)	0.18 (.007)	0.15 (.006)

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.10	.004	3.71	.146	11.05	.435	41.02	1.615
0.15	.006	3.88	.153	16.97	.668	45.44	1.789
0.20	.008	3.91	.154	17.58	.692	45.54	1.793
0.25	.010	3.96	.156	18.11	.713	46.48	1.830
0.30	.012	3.99	.157	20.55	.809	50.14	1.974
0.38	.015	4.57	.180	21.08	.830	52.58	2.070
0.79	.031	4.67	.184	22.53	.887	53.09	2.090
1.40	.055	4.70	.185	27.69	1.090	60.96	2.4
1.45	.057	4.78	.188	32.94	1.297	80.90	3.185
1.65	.065	4.88	.192	33.05	1.301	100.71	3.965
1.70	.067	5.08	.2	33.10	1.303	100.84	3.970
1.83	.072	5.46	.215	33.27	1.310	100.86	3.971
2.03	.080	5.84	.230	33.26	1.349	105.99	4.173
2.11	.083	6.40	.252	34.37	1.353	120.09	4.728
2.54	.1	8.26	.325	38.00	1.496	130.81	5.15
2.67	.105	10.80	.425	38.96	1.534	131.31	5.170
		10.92	.430				

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /97, and /99.

Inserts: See DOD-STD-1842 and MIL-C-83527/8.

Mating connector: See MIL-DTL-83527/1.

Part or Identifying Number (PIN) example:

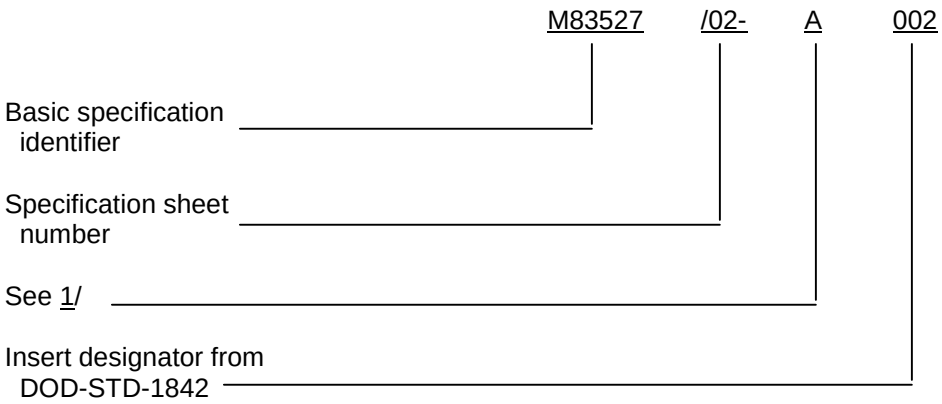

1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

Reference documents. In addition to MIL DTL-83527, this document references the following:

MIL-C-39029/93
MIL-C-39029/94
MIL-C-39029/97
MIL-C-39029/99
MIL-C-83527/8
MIL-DTL-83527/1
DOD-STD-1842

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4509-002)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at http://www.dodssp,daps.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.