INCH-POUND

MIL-DTL-83528/1E
19 November 2013
SUPERSEDING
MIL-DTL-83528/1D
15 November 2001

DETAIL SPECIFICATION SHEET

# GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, CIRCULAR STRIP, .040 THROUGH .250 DIAMETER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-DTL-83528.

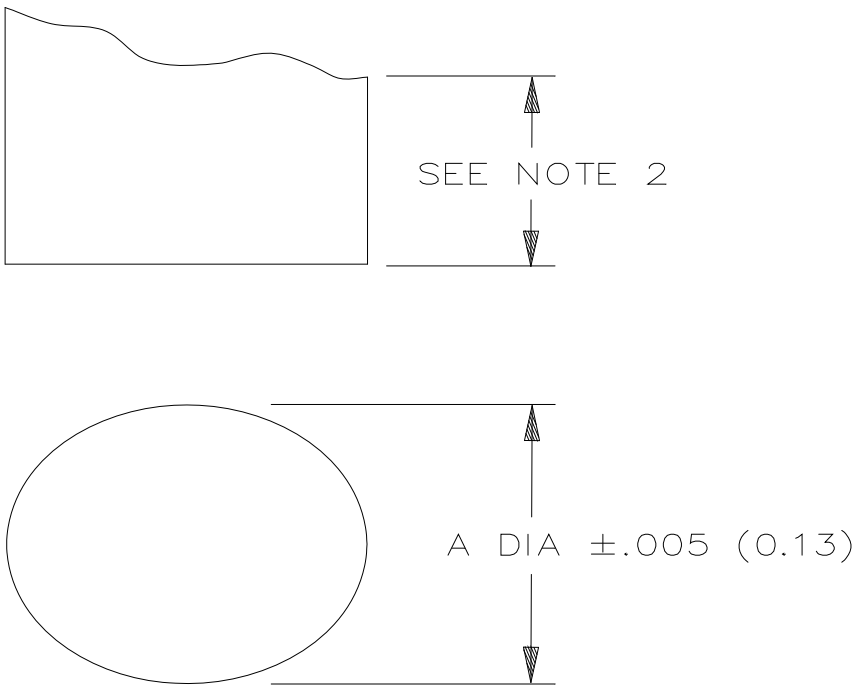


NOTES:
1. Dimensions are in inches; metric equivalents are given in .parenthesis and are for general information only.
2. Length shall be as specified on the purchase order.
3. Tolerance on flash shall be ± .008 (0.20 mm) on the extension and ± .005 (0.13 mm) on the thickness.

FIGURE 1. EMI/RFI circular strip gasket.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and interface: See figure 1 and table I.

Material: Type A, B, C, D, E, F, H, J, K, L, or M.

Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

TABLE I. Dimensions.

| PIN 1/ M83528/001X | Dimension A ± .005 2/ 3/ | Cross section 4/ area ($cm^2$) |
|---|---|---|
| 001 | .040 (1.02) | .008 |
| 002 | .053 (1.35) | .014 |
| 003 | .062 (1.57) | .020 |
| 004 | .070 (1.78) | .025 |
| 005 | .080 (2.03) | .032 |
| 006 | .093 (2.36) | .043 |
| 007 | .103 (2.62) | .053 |
| 008 | .119 (3.02) | .072 |
| 009 | .125 (3.18) | .079 |
| 010 | .139 (3.53) | .099 |
| 011 | .188 (4.78) | .179 |
| 012 | .216 (5.49) | .236 |
| 013 | .250 (6.35) | .316 |

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M83528/001A001.
2/ Tolerance shall be ± .008 for parts over .200 in diameter.
3/ Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
4/ For calculation of volume resistivity (for reference only).

TABLE II. Supersession information.

| PIN 1/ M83528/001X | Superseded DESC Drawing PIN 85103X 1/ |
|---|---|
| 001 | 001 |
| 002 | 002 |
| 003 | 003 |
| 004 | 004 |
| 005 | N/A |
| 006 | 005 |
| 007 | 006 |
| 008 | 007 |
| 009 | 008 |
| 010 | 009 |
| 011 | N/A |
| 012 | 010 |
| 013 | N/A |

1/ "X" in the PIN indicates the applicable material type.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. This document references MIL-DTL-83528.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activities:
Air Force – 19, 99
NSA – NS

Preparing activity:
DLA-CC

(Project 5999-2013-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.