COMMERCIAL ITEM DESCRIPTION

SAW, CIRCULAR, GASOLINE ENGINE DRIVEN, PORTABLE


The General Services Administration has authorized the use of this commercial item description.

Salient characteristics:

Powered by an air cooled, single cylinder, two-cycle gasoline engine.
Develops 5.5 brake horsepower minimum at 6000 RPM when tested in accordance with the requirements of SAE Standard J607. Piston displacement 5.5 cubic inches minimum.
Capable of cutting in any position.
All controls (fuel primer or choke, throttle, and ignition switch) conveniently positioned for operator control.
Weight (less fuel and blade) 31 pounds maximum
High strength V-belt housed in a safety guard.
Adjustable blade guard.
Non-tip type base stand.
12 inch saw blade capacity.
Furnished with: Complete set of operating and maintenance instructions
List of available accessory equipment
Illustrated parts breakdown
Special equipment and tools necessary to assure efficient operation and maintenance in accordance with the instructions
Each saw with accessories, instructions, etc., shall be furnished in a metal carrying case.

Accessories furnished:

1 ea	12 inch diameter carbide tipped blade
1 ea	12 inch diameter reinforced steel cutting abrasive wheel
1 ea	12 inch diameter reinforced concrete abrasive wheel
1 ea	Safety can of one gallon capacity, in accordance with Underwriters' Laboratories Standard Number 30
1 pair	Safety goggles, polycarbonate lenses.
1 ea	Spare drive belt
1 ea	Spare air filter
1 ea	Supply of 2-cycle engine oil

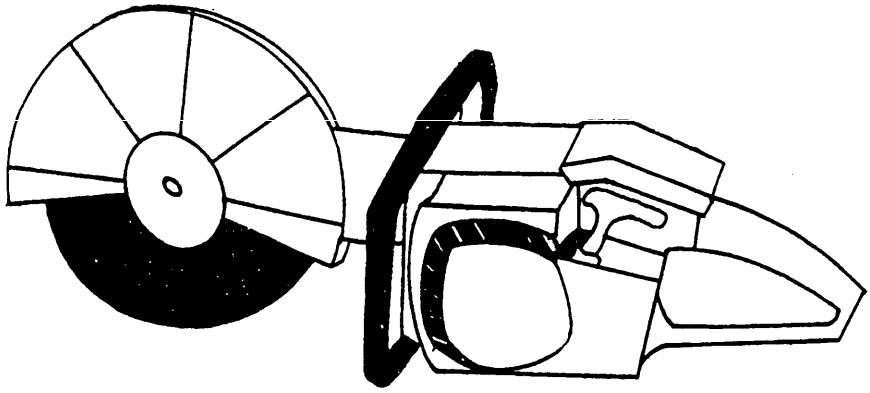

Workmanship. The saw, including all parts and accessories, shall be free from fins, burrs, rust, imperfections and any other defects which may impair serviceability, durability, or appearance.

The issue of SAE Standard J607 and UL Standard 30 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each saw with accessory parts shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Marking shall be in accordance with contract or order.

Note: Assigned National Stock Number (NSN) 5130-00-134-1207.

SAE Standards are available from Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.

UL Standards are available from Underwriters' Laboratories, Inc., 1285 Walt Whitman Road, Melville Long Island, NY 11747.

GSA DC-01001764

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.