A-A-51311
30 December 1985

COMMERCIAL ITEM DESCRIPTION

WHEEL, ABRASIVE, IMPREGNATED RUBBER, PUMICE

The General Services Administration has authorized the use of this commercial item description in preference to Interim Federal Specification GG-W-00253A (DSA-DM).

This commercial item description covers abrasive wheels suitable for use in dentistry for polishing metals, plastic, and porcelain.

The wheels shall be furnished in the following style numbers, as specified:

1, 2, 3

Salient characteristics:

The wheel shall be fabricated from a suitable rubber compound into which has been incorporated 70 ± 5 percent of grade 1-1/2 ground pumice, as ascertained from the manufacturer's batch formula control records. The pumice shall be free from quartz, obsidian and iron, and shall be odorless and tasteless.

The wheel shall be of the design and dimensions shown in Figure 1 for the applicable styles.

The No. 1 and No. 2 wheels shall have a knife edge. The No. 3 wheel shall have a square or round edge.

The wheel shall possess such flexibility that it will conform to the applied surfaces when revolving under high or low speed, and shall be suitable for polishing dental restorations and prosthetic appliances without splitting or wearing unduly in normal use.

Not more than 3 months shall have elapsed from date of manufacture of the wheels to date of delivery to the Government.

The wheel shall cause no pronounced scratches, when tested as specified in scratch test below. The wheel shall have a tumble finish and the mandrel holes shall be centered in the wheel.


Workmanship. The wheel shall be free from defects which detract from its appearance or impair its serviceability.


Unit.

Box (BX). For style 1 and style 2, one box containing 25 wheels of one style only, as specified, constitutes one unit.


For style 3, one box containing 100 wheels, as specified, constitutes one unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:54Z
Check the source to verify that this is the current version before use.

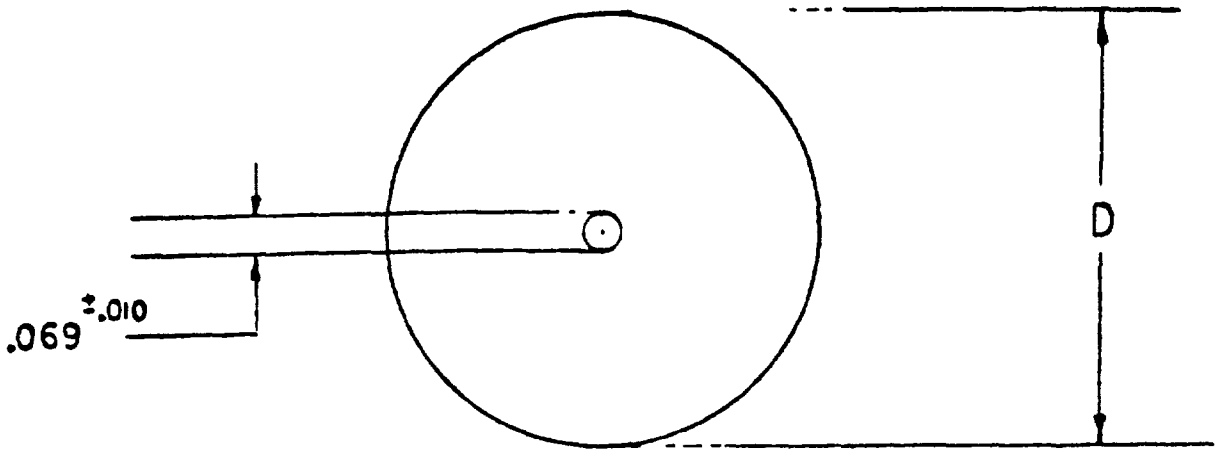


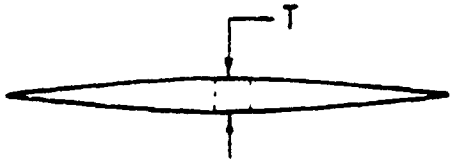

KNIFE EDGE
(STYLE 1 & 2)

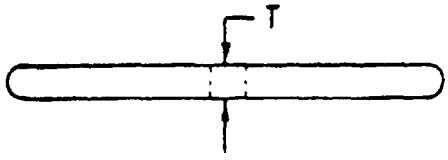

ROUND EDGE
(STYLE 3)

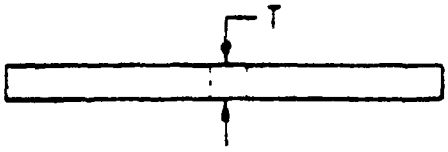

SQUARE EDGE
(STYLE 3)

Style	Diameter of Wheel "D"	Thickness of Wheel At Center "T"
1	0.375 ± 0.016	0.095 ± 0.010
2	0.625 ± 0.032	0.119 ± 0.010
3	0.875 ± 0.032	0.125 ± 0.010

Note: Dimensions are in inches

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:54Z
Check the source to verify that this is the current version before use.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Scratch test. Place an abrasive wheel on a clear plate glass. Rub all critical working surfaces of the wheel over the surface of the glass for 3 minutes, using circular and straight strokes. Examine surface of glass for any pronounced scratches.

Sampling for inspection. Sampling for inspection shall be conducted in accordance with MIL-STD-105. Where feasible, the same sample shall be used for the determination of two or more inspection characteristics. The unit of product for inspection purposes shall be one wheel. Unless otherwise specified, sampling for examination shall be conducted at inspection level II, AQL 2.5, and sampling for tests (when applicable) shall be conducted at inspection level S-1, AQL 1.0.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:54Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U. S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate /exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

NOTE: The following National Stock Numbers (NSNs) are covered by this document.

NSN	ITEM IDENTIFICATION
6520-00-523-1115	WHEEL, ABRASIVE, Impregnated Rubber, Pumice, Knife Edge, 3/8 inch (9.52 mm) Diameter, 25s
6520-00-523-1120	WHEEL, ABRASIVE, Impregnated Rubber, Pumice, Knife Edge, 5/8 inch (15.87 mm) Diameter, 25s
6520-00-568-6150	WHEEL, ABRASIVE, Impregnated Rubber, Pumice, Round or Square Edge, 7/8 by 1/8 inch (22.22 by 3.17 mm), 100s

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:54Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

CIVIL AGENCY COORDINATING ACTIVITY

VA-OSS

05418

PREPARING ACTIVITY:

DoD-MB

AGENT:

DLA-DM

Project No. 6520-1841

Location S2-11-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:54Z
Check the source to verify that this is the current version before use.