MIL-S-36057A
14 February 1974
SUPERSEDING
MIL-S-36057
31 May 1961

MILITARY SPECIFICATION

SCISSORS, GENERAL SURGICAL, MAYO

This specification is approved for use by all Departments and and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers general surgical scissors of the Mayo design, suitable for use as dissecting scissors in general surgery.

1.2 Classification.

1.2.1 Types and sizes. Scissors shall be of the following types and sizes, as specified (see 6.1):

Type I - Curved
Size 1-5-1/2 inches overall length.
Size 2-6-3/4 inches overall length.
Size 3-9 inches overall length.

Type II - Straight
Size 1-5-1/2 inches overall length.
Size 2-6-3/4 inches overall length.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of the specification to the extent specified herein:

SPECIFICATION

Federal

GG-I-526	Specifications, Dental and Surgical; General Specifications.
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Set-Up.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservations, Methods of.
MIL-L-10547	Liners, Case and Sheet Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 General Requirements. The scissors shall be in accordance with the applicable requirements of GG-I-526 and the following option exercises under that specification:

* 3.2 Material. The scissors shall be fabricated from Class 4, Type 420 material, except that the carbon content shall be a minimum of 0.30 percent.

* 3.3 Hardness. After proper stress relieving, the scissors shall have a Rockwell hardness of C50 to C55 (with the exception of the screw).

3.4 Style, design, and dimensions.

3.4.1 Type I scissors. Type I scissors shall be of the Mayo design, having curved blades with blunt points and shall be suitable for use as dissecting scissors. All Type I scissors shall be in accordance with Figure 1.

3.4.2 Type II scissors. Type II scissors shall be of the Mayo design, having straight blades with blunt points and shall be suitable for use as dissecting scissors. All Type II scissors shall be in accordance with Figure 2.

* 3.5 Finish. Finish shall be mirror, except inside blades shall be crocus.

* 3.5.1 Passivation. The entire item shall be properly passivated.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:02Z
Check the source to verify that this is the currentversion before use.

* 3.6 Cutting edges. Scissors shall cut a continuous length of at least the distance indicated in Table I for appropriate type and size of the test material, when tested as specified in 4.4.1. This cutting requirement shall apply for the entire length of the cut specified, including the tips of the scissors. All three cuts made with each scissors tested shall meet the requirements of this specification.

Table I

Type	Size	Length of cut (inches, minimum)
I	1	3/4
	2	7/8
	3	1-1/8
II	1	3/4
	2	7/8

3.7 Identification marking. In addition to GG-I-526 requirements, instruments of foreign manufacture shall also be marked "stainless".

* 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Shall be in accordance with GG-I-526.

4.1.2 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the corrosion-resistant steel, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and as indicated in Tabie II. The unit of product for examination purposes shall be one scissors.

Tabel II. Sampling Criteria for Examination

Type of defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor A	II	2.5
Minor B	S-2	4.0

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in Table III. Unit of product for test purposes shall be one scissors.

Table III. Sampling Criteria for Tests

Component	Characteristic	Require-ment	Test procedure	Inspection level	AQL
Scissors	Composition analysis	3.2 and GG-I-526	GG-I-526	*	-
	Hardness	3.3 and GG-I-526	GG-I-526	S-2	1.0
	Dimensions	3.4	---------	S-2	1.5
	Copper sulfate test	GG-I-526	GG-I-526	S-2	1.0
	Boil test	GG-I-526	GG-I-526	S-2	1.0
	Scissors performance test	3.6 and GG-I-526	4.4.1 and GG-I-526	II	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

* Four ounces of each lot of metal used in the construction of the scissors shall be selected for chemical analysis.

* 4.3 Examination. The scissors shall be examined to determine compliance with all requirements contained in this specification. Examination shall be conducted as specified in Table II and IV. Examination, however, shall not be restricted to defects listed in Table IV. Any scissors in the sample containing one or more defects shall be rejected and if the number of defective items in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Table IV Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Scissors blades not of curved or straight design with blunted tips (as shown on applicable Figure).
102	Scissors halves not properly assembled with respect to each other as shown on applicable Figure.
103	Cutting action of scissors not free of excessive stiffness.
104	Screw in lock not permanently set in a fixed position.
105	Screw lock not properly assembled.
106	Cutting edges not free of nicks, feathers, and burs.
107	Surfaces of scissors not free of pits, corrosion, discoloration, or plating.
108	Scissors not free of cracks.
109	Scissors surfaces not free of burs, roughness, or sharpness (except cutting edges).
110	Labels or printed marking on unit container not correct (particularly stock number and item identification).
Minor A	
201	Finish not mirror and crocus (on back of blades).
202	Finish not free of coarse grind marks or deeply scratched surface areas.
203	Identification marking not permanent, legible, and complete.
104	Labels or markings on unit container not legible and free of defacing marks, scratches, and tears.
Minor B	
251	Dimensions not within tolerance shown on applicable Figure.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.4.1 Scissors performance test. The test material shall be rubber dam meeting the requirements of the Military Medical Purchase Description for National Stock No. 6520-00-754-2469, Rubber Dam, Medium, 6 inches square. Three separate, consecutive tests shall be performed for each scissors as described and specified in GG-I-526.

* 5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One scissors, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table V shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement.

Table V. Packaging Quantities

Type and Size	Unit package	Intermediate package	Exterior container
Type I and II, Sizes 1 and 2	1 unit	12 units	288 units
Type I, Size 3	1 unit	12 units	144 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Not required.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

5.1.3.5 Intermediate package. Intermediate package shall be a carton of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors shall be acceptable, or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packages in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior containers. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification. Fiberboard boxes shall conform to the special requirements as specified in Table II of PPP-B-636.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed in accordance with 30.4 of PPP-B-636.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be closed by method II of PPP-B-636. Fiberboard boxes shall conform to the special requirements as specified in Table I of PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

5.3.2 Exterior container: Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use. The general surgical scissors are intended to be used as dissecting scissors in general surgery.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number, title and date of this specification.
(b) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.3 National Stock Number (NSN) coverage. This specification covers the following items listed in the Federal Supply Catalog.

National Stock No.	Item Identification
6515-00-364-0500	SCISSORS, GENERAL SURGICAL, Curved, Mayo, 5-1/2 inch
6515-00-364-0520	SCISSORS, GENERAL SURGICAL, Curved, Mayo, 6-3/4 inch
6515-00-364-0560	SCISSORS, GENERAL SURGICAL, Curved, Mayo, 9 inch
6515-00-364-0900	SCISSORS, GENERAL SURGICAL, Straight, Mayo, 5-1/2 inch
6515-00-364-0920	SCISSORS, GENERAL SURGICAL, Straight, Mayo, 6-3/4 inch

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1794

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

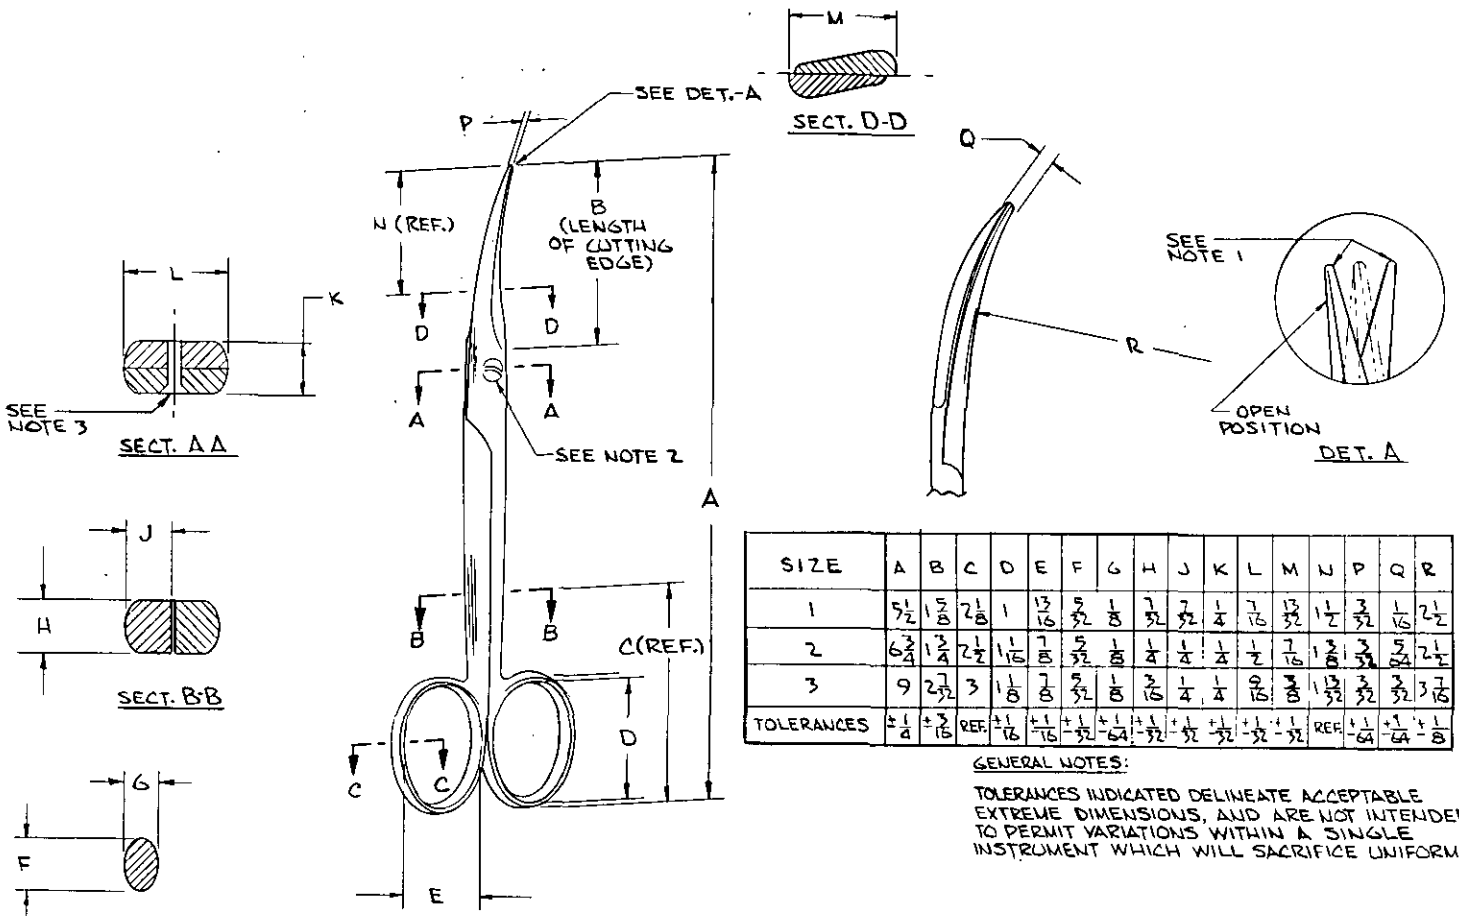

SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
1	5 1/2	1 5/8	2 1/8	1	13/16	5/32	1/8	7/32	7/32	1/4	7/16	13/32	1 1/2	3/32	1/16	2 1/2
2	6 3/4	1 3/4	2 1/2	1 1/16	7/8	5/32	1/8	1/4	1/4	1/4	1/2	7/16	1 3/8	3/32	5/64	2 1/2
3	9	2 7/32	3	1 1/8	7/8	5/32	1/8	3/16	1/4	1/4	9/16	3/8	1 13/32	3/32	3/32	3 7/16
TOLERANCES	±1/4	±3/16	REF.	±1/16	+1/16 -1/32	+1/32 -1/64	+1/64 -1/32	+1/32 -1/32	+1/32 -1/32	+1/32 -1/32	+1/32 -1/32	REF.	+1/64 -1/64	+1/64 -1/8		

GENERAL NOTES:

TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY.


NOTE:

1. CUTTING EDGE SHALL EXTEND TO EXTREME TIP OF SCISSORS.
2. SCREW SHALL RETAIN POSITION AFTER SETTING WITHOUT BINDING OR LOOSENING DURING USE.
3. FLAT HEAD C'BORER SCREW OR C'SK SCREW.

FIG. 1 - TYPE I

MIL-S-36057A

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T08:02Z
Check the source to verify that this is the current version before use.

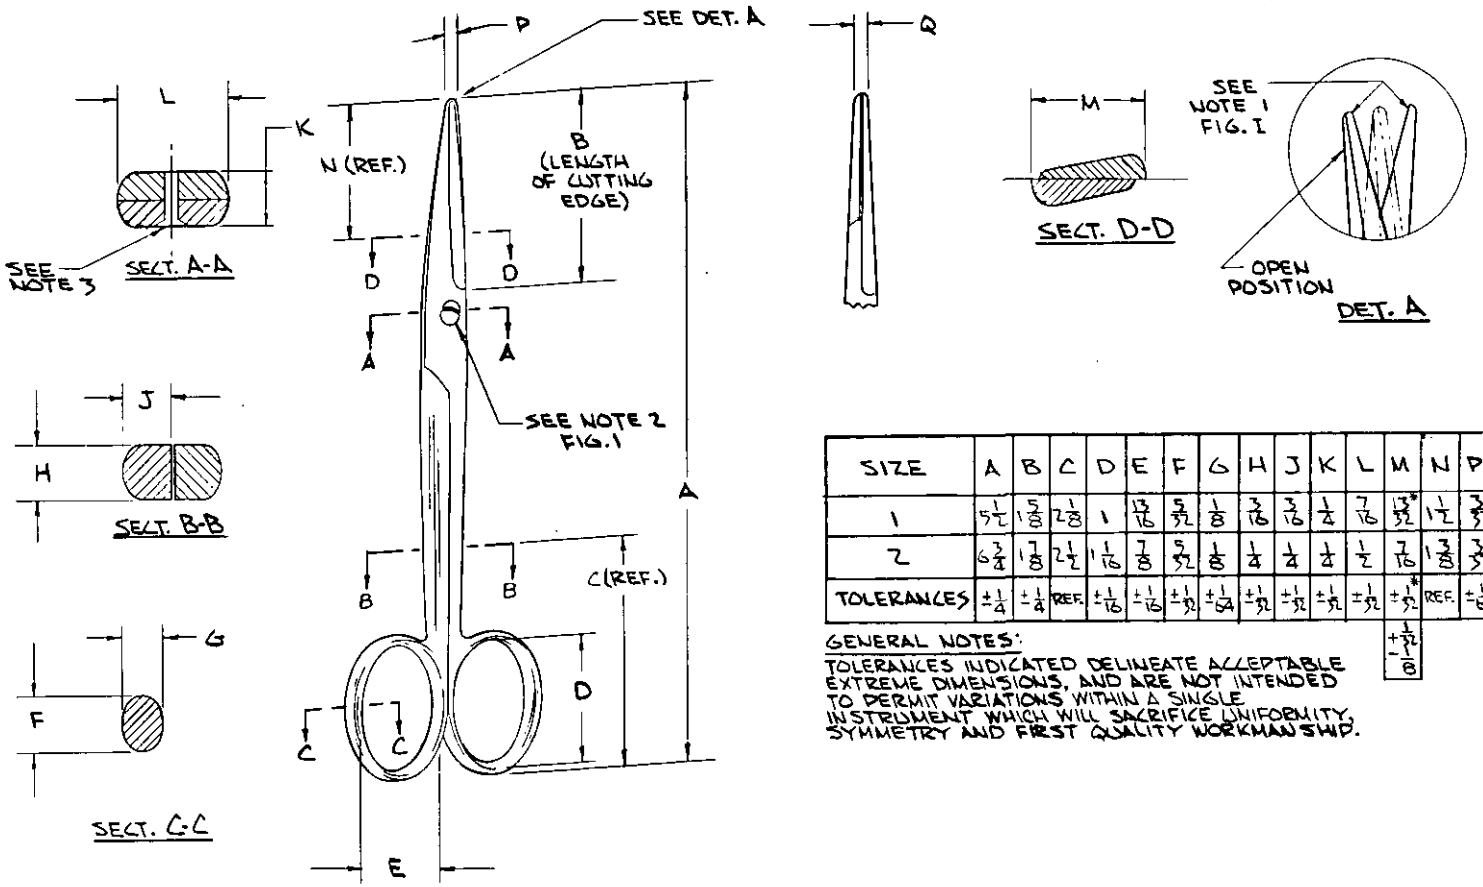

STRAIGHT, MAYO SCISSORS

SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
1	5 1/2	1 5/8	2 1/8	1	13/16	5/32	1/8	3/16	3/16	1/4	7/16	13/32*	1 1/2	3/32	1/16
2	6 3/4	1 7/8	2 1/2	1 1/16	7/8	5/32	1/8	1/4	1/4	1/4	1/2	7/16	1 3/8	3/32	1/16
TOLERANCES	±1/4	±1/4	REF.	±1/16	±1/16	±1/32	±1/64	±1/32	±1/32	±1/32	±1/32	±1/32* +1/32 -1/8	REF.	±1/64	±1/64

GENERAL NOTES:

TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.

NOTE:

1. CUTTING EDGE SHALL EXTEND TO EXTREME TIP OF SCISSORS.
2. SCREW SHALL RETAIN POSITION AFTER SETTING WITHOUT BINDING OR LOOSENING DURING USE.
3. FLAT HEAD C'BORER SCREW OR C'SK SCREW.

FIG. 2 TYPE II

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974-713-152/4202

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T08:02Z
Check the source to verify that this is the current version before use.