INCH-POUND

MIL-DTL-3052F
29 June 2026
SUPERSEDING
MIL-D-3052E
30 June 1978

MILITARY SPECIFICATION

DECORATION, FOURRAGERE

This specification is approved for use by all
Department and Agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers the requirement for fourragères awarded by the French Government and the Belgian Government.

1.2 CLASSIFICATION

1.2.1 Type and classes The fourragère will be one size and in the following types and classes as specified (See 6.2)

Type I – French World War I, Two citations
Class 1 – Polished ferrule and ring
Class 2 – Bronzed (Oxidized) ferrule and a ring

Type II – French World War I, Four citations

Type III – New French, World War II, Two Citations

Type IV – New French, World War II, Four Citations

Type V – Belgian, World Wars I and II, Two Citations

2. APPLICABLE PUBLICATIONS

2.1 Government documents.

Comments, suggestions, or questions on this document should be addressed to The Institute of Heraldry, ATTN: Technical and Production Division, 9325 Gunston Road, Room S-108, Fort Belvoir, VA 22060-5579 or email to usarmy.belvoir.hqda.mil.tioh-webmaster@army.mil. You may verify the currency of this specification using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

2.1.1 The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether they are listed.

FEDERAL STANDARD

A-A-52094 - Thead cotton
FED-STD-191 - Textile test methods

MILITARY STANDARD

MIL-STD-1916 - DOD Preferred Methods for Acceptance of Product
MIL-STD-129 - Military Marking for shipment and storage

(Copies are available online at https://assist.mil)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

THE INSTITUTE OF HERALDRY DRAWINGS

B-10-0008 - Decoration, Fourragere (illustrated as Figure 1)

(Reduced size copies of the above drawings are included in the specification to illustrate the different types, classes, and construction of buttons. Full size versions of TIOH numbered drawings only can be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are issues of the documents cited in the solicitation (see 6.2).

ASTM INTERNATIONAL

ASTM-D5118/D5118M - Boxes, Fiberboard Shipping,
ASTM-D2103 - Polyethylene film and sheeting
ASTM-E1282 - Metal, test method
ASTM-D276 - Standard Test Methods for Identification of Fibers in Textiles

ASTM-D1907 - Standard Test Method for Linear Density of Yarn (Yarn Number) by the Skein Method

ASTM-D3775 - Standard Test Method for Fabric Count of Woven Fabric

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

ASTM-D3776 - Standard Test Method for Mass per Unit Area (Weight) of Fabric

ASTM-D5034 - Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Grab Test)

ASTM-D5486 – Standard Specification for Pressure-Sensitive Tape for Packing, Box Closure, and Sealing

(Copies of these documents are available online at http://www.astm.org)

AMERICAN SOCIETY FOR QUALITY CONTROL

ANSI/ASQC Z1.4 1993 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of these documents are available online at https://acq.org)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

AATCC-16 - Colorfastness to Light

AATCC-61 -Colorfastness to Laundering, Home and Commercial; Accelerated AATCC-96 - Dimensional Changes in Commercial Laundering of Woven and Knitted Fabrics Except Wool

AATCC-99 - Dimensional Changes of Woven or Knitted Wool Textiles: Relaxation, Consolidation

(Copies of these documents are available online at https://www.aatc.org)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 SAMPLES

3.1.1 Guide sample. Samples are furnished solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.1.2 Standard samples. The decoration shall match the standard sample in shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.2).

3.1.2.1 Yarn. Unless otherwise specified (see 6.2), a standard sample of the stuffer yarns and rayon or nylon yarn for the cover shall be furnished for matching fastness only

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

3.1.2.2 Ferrule. Unless otherwise specified (see 6.2), a sample of the bronzed ferrule shall be furnished for matching color only.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished fourragère shall be submitted or made available to the contracting officer or authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with applicable provisions of this specification. The first article shall be manufactured by the contractor in the same manner and in the same facilities to be used for the production items.

3.3. Materials. Materials shall conform to the specifications referenced and the requirements specified herein.

3.3.1 Yarn.

3.3.1.1 Cotton Core. The stuffer yarn for the cord shall be 4/4 cotton.

3.3.1.2 Rayon Cover. When rayon is used for the cord and loop cover, the yarn shall be continuous filament, regenerated cellulose type rayon yarn, 450 denier with 60 to 100 filaments. The yarn for the cord and loop shall be 450/3 ply with 6 (plus or minus) 1 turn per inch.

TABLE I. Colors

Type	Cord cover	Color Loop and Cord
I	Irish Green HCO 67189 Old Glory Red HBF 67156	Irish Green HCO 67189
II	Irish Green HCO 67189 Golden Yellow HB 67104	Irish Green HCO 67189
III	Irish Green HCO 67189 Old Glory Red HBF 67156	Irish Green HCO 67189
IV	Irish Green HCO 67189 Golden Yelow HB 67104	Irish Green HCO 67189
V	Primitive Green HCN 67188 Scarlet HL 67111	Scarlet HL 67111

3.3.1.3 Nylon Cover. When nylon is used for the cord and loop cover, the yarn shall be continuous filament, bright nylon of 420 denier having a minimum of 68 filaments. The yarn for the cord shall be 420/3 ply with 6 (plus or minus) 1 turn per inch. The yarn for the loop shall be 420/2 ply with 6 (plus or minus) 1 turn per inch.

3.3.2 Epoxy resin (stoning epoxy). Epoxy resin shall be a stoning epoxy pigmented to produce the required color, opacity or translucence; shade incorporating an ultraviolet inhibitor and have a shore D hardness of 77.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

3.3.3 Lacquer. Lacquer shall be a semi-gloss, clear, synthetic lacquer. The use of a pigmented lacquer shall not be permitted.

3.3.4 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregation, and foreign inclusions that cannot be removed in later processing. When tested as specified in 4.5.1, the chemical composition of the copper content of the copper base alloy shall be as specified in Table II.

TABLE II. Unified Numbering System and Copper content of copper base alloys.

UNS ALLOY NUMBER	ALLOY NAME	COPPER
C210	Gilding Metal	94.0%-96.0%
C220	Bronze	89.0%-91.0%
C230	Red Brass	84.0%-86.0%
C240	Low Brass	78.5%-81.5%
C268	Yellow Brass	64.0%-68.5%
C280	Free Cutting Brass	59.0%-63.0%
C745	Nickel Brass	63.0%-66.5%
C752	Nickel Silver (65-18)	63.0%-66.5% 2/
C770	Nickel Silver (55-18)	53.5%-56.5% 1/

1/ Copper content for the nickel silver pin only may be 53.5% to 56.5% (C770).

2/ When nickel silver is used as a base material, the nickel content shall be not less than 18% (C752).

3.3.5 Thread.

3.3.5.1 End loop cord. Thread for stitching the loop cord shall conform to type 1A3, ticket 50 ply of A-A-52094.

3.3.5.2 Buttonhole cord. The thread for stitching the buttonhole loop to the plaited cord shall conform to type 1C2, ticket C, 3 ply of A-A- 52094.

3.4 Color.

3.4.1 Yarn. All yarns, including the rayon or nylon cover yarn and cotton core yarn, shall be dyed as specified in Table I. The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidization to sulfuric acid is prohibited. When tested as specified in 4.2.1, there shall be no stain showing on the filter paper.

3.4.1.1 Matching. The color shall match the approved standard shade under artificial daylight having a color temperature of 7500 (plus or minus) 500 degrees Kelvin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

3.4.1.2. Colorfastness. The finished cloth shall show fastness to wet dry-cleaning and light equal to or better than the standard sample or equal to or better than a rating "good." The finished cloth shall show fastness to crocking equal to or better than the standard sample or shall have AATCC Chromatic Transference Scale rating of not lower than 7.5, except that for naphthol dyed cloth shall have an AATC Chromatic Transference Scale rating of not lower than 6.5. Testing shall be as specified in 4.3.

3.4.2 Thread. Thread used for sewing or tacking the pendant ribbon neck ribbons or snap fasteners shall be a mercerized cotton thread conforming to Ticket A, 3 Ply, Type III of A-A-52094. The color of the thread shall match the color of the area of the ribbon to be sewn on or tacked. Yarns used for embroidery shall match the Department of Defense Standard Shades for Heraldic Yarns, 2012 Edition.

TABLE III. Number of ends of each color for cord cover

Classification	Number of ends				
	Irish Green HCO	Primitive Green HCN	Old Glory Red HBF	Scarlet HL	Golden Yellow HD
Type I	12	-	4	-	-
Type II	12	-	-	-	4
Type III	8	-	8	-	-
Type IV	8	-	-	-	8
Type V	-	3	-	13	-

3.4.3 Ferrule and ring. The ferrule and ring shall be made from any type of brass specified in 3.3.4 and shall conform to the details and dimensions on Figure 1.

3.4.3.1 Finish. Except for type I, class 2 ferrule and ring, all ferrules and rings shall be wheel-polished to a mirror-like finish. The ferrules and rings shall be completely coated with lacquer specified in 3.3.3. When tested as specified in 4.4.3.1, there shall be no change in appearance except for slight yellowing of the highlights. When tested as specified in 4.4.3.2, the tissue paper shall not adhere to the ferrule or ring.

3.4.3.1.1 Type I, class 2. The type I, class 2 ferrule and ring shall be coated with epoxy specified in 3.3.2. When tested as specified in 4.4.5, no color shall transfer to the cotton swab. When tested as specified in 4.4.6, the epoxy shall not flake or chip.

3.5 Construction. The fourragère shall be made from single piece of braided plaiting cord specified in 3.5.1, and in accordance with the details and dimensions of Figure 1 and the requirements specified herein.

3.5.1 Braided plaiting cord. The finished cord shall consist of a braided tubular rayon or nylon cover specified in 3.3.1.2 over a cotton core stuffer yarn specified in 3.3.1.1. Sufficient ends of the cotton yarn shall be used to ensure the finished cord is round, firm, and 7/32 inch (plus or minus) 1/32 inch in diameter. The rayon or nylon cover shall be braided on a carrier machine, at the 1 end per carrier, with not less than 24 picks per inch in a two over, two under, plain braid The nylon or rayon cover yarn shall be braided in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

accordance with the design shown in Figure 1 using the number of ends of each color specified in Table III.

3.5.2 Buttonhole and loop cord. The finished buttonhole and loop cord shall consist of a tubular braided rayon or nylon cover over sufficient cotton core stuffer yarn to ensure a diameter of 3/32 inch (plus or minus) 1/32 inch.

3.5.3 Fourragère construction. With a single piece of braided plaiting cord specified in 3.5.1 begin at one free end, see Figure 1, and by using a buttonhole and loop cord specified in 3.5.2 form a loop 1-3/8 inches (plus or minus) 1/8 inch. Secure loop by stitching and wrapping the free end with not less than ten turns of buttonhole and loop cord for an area of 1 inch (plus or minus) 1/8 inch. From the wrapping there shall be 2-1/4 inches (plus or minus)1/4 inch of plain braided plaiting cord. The cord shall then be plaited for 26inches(plus or minus) 2 inches, using 50 (plus or minus) 2 plaits. The braided plaiting cord shall be knotted area shall be 1-inch (plus or minus) 1/8 inch in width. The ferrule shall be secured to the end cord by stitching through the four holes in the ferrule to ensure a force fit for the ring 2-5/8 inches (plus or minus) 1/4 inch from the four knots. Midway between the plaited section and the knotted section, a buttonhole loop 1 (plus or minus) 1/8 inch shall be formed with minimum of 4-1/4 inches of loop cord. The loop shall be inserted underneath the tubular braid a minimum of 1 inch, then the loop shall be securely sewn to the braided plaiting cord with tread specified in 3.3.5.1. When tested as specified in paragraph 4.4.1, the buttonhole and end loop shall show no sign of pulling loose.

3.6 Workmanship. The finished fourragères shall be clean and well made.

4. VERIFICATIONS

4.1 Inspection responsibility. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

4.3 First article inspection. When a first article is required, inspection and testing of the first article shall be made for all provisions of this specification applicable to the end item product examination and test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

4.3.1 Testing of component. In addition to the quality assurance provision of subsidiary specifications and drawings, components shall be tested as specified in Table IV. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in Table IV, they shall be required by the referenced test method. All requirements are applicable for the individual sample unit except for the breaking strength of the buttonhole cord, which shall be applicable to the lot average. The inspection level shall be S-1 and the acceptable quality level for sample unit requirements shall be 6.5 defects per hundred units. The sample unit for test in Table IV shall be as follows:

Component	Sample unit
Rayon or nylon yarn for cord cover and loop cord	1 cone, spool or tube
Cotton core stuffer yarn	1 cone, spool or tube
Ferrule and ring	2 each

TABLE IV. Component Testing

Component	Characteristics	Requirement Paragraphs	Test Method	#Determ Per s/u	Results Reported as
Rayon yarn for cord cover and loop cover	Material ident.	3.3.1.2	ASTM-D276	1	Pass or fail
	Size of yarn	3.3.1.2	ASTM-D1907	1	" " "
	Continuous filament	3.3.1.2	Std. Com' 1	1	" " "
	Number of filament	3.3.1.2. 1/	Std. Com' 1	1	" " "
Nylon yarn for cord cover and loop cover	Material ident.	3.3.1.2	ASTM-D276	1	" " "
	Size of yarn	3.3.1.2	Std. Com' 1	1	" " "
	Continuous filament	3.3.1.2	Std. Com' 1	1	" " "
	Number of filament	3.3.1.2. 1/	Std. Com' 1	1	" " "
	Sulfur content	3.4.1	2020 1/	1	" " "
	Colorfastness to laundering	3.4.1.2	AATCC-96	1	" " "
	Wet-dry cleaning	3.4.1.2	5622	1	" " "
	Light 2/	3.4.1.2	5660	1	" " "
Cotton core stuffer yarn	Material ident.	3.3.1.1	ASTM-D276	1	" " "
	Size of yarn	3.3.1.1	Std. Com' 1	1	" " "
	Colorfastness to laundering	3.4.1.2	AATCC-96	1	" " "
	Wet- dry cleaning	3.4.1.2	5622	1	" " "
	Sulfur content	3.4.1	2020 1/	1	" " "
	Diameter	3.5.1	Visual	1	Nearest 1/32 inch
Braided plating cord	Tubular No. of carrier	3.5.1	Visual	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

	Ends per	3.5.1	Visual	1	Nearest whole No.
	carrier	3.5.1	Visual	1	Nearest whole No.
	Picks per inch	3.5.1	Visual	1	Average of determ to nearest whole No.
	Weave	3.5.1	Visual	1	Pass or fail
Ferrule and ring	Material ident.	3.3.4	ASTM-D276	2 for EA eleme	Nearest 0.10
	Liver of sulfur	3.4.3.1	4.4.3.1	nt	Pass or fail
	Tackiness	3.4.3.1	4.4.3.2	2 (1 for ferrule, 1 for ring)	Pass or fail
	Acetone test	3.4.3.1.1	4.4.5	2 (1 for ferrule,1 for ring)	Pass or fail
	Knife test	3.4.3.1.1	4.4.6	2 (1 for ferrule,1 for ring)	Pass or fail
				2 (1 for ferrule,1 for ring)	

1/ Requirements accepted on basis of manufacture's certification of compliance thereto.

2/ The time exposure shall be 80 standard fading hours.

4.3.2 Inspection of end item.

4.3.2.1 Visual examination of end item. The defects found during this examination shall be classified in accordance with 4.3.2.2.2 and 4.3.2.1.2.The lots shall be inspected in accordance with 4.3.2.2.3. The sample unit for this examination shall be one completely fabricated fourragère.

4.3.2.1.1 Examination of fourragère for defects in material, construction, and workmanship. Defects designated by an (*) shall be classified as major when seriously affecting appearance or serviceability and minor when appearance or serviceability are not seriously affected.

Examine	Defect	Classification Major (*) Minor

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

Cord and loop material	Color or shade not as specified……..	X	-	-
	Not fabricated from the specified material.	X	-	-
	Spotted, stained, discolored or soiled……	X	-	-
	Objectionable odor……	-	-	X
	Unevenly braided…….	-	*	-
	Cut or tear……...	X	-	-
	Broken, missing end or pick…….	X	-	-
	Pulled threads……	-	*	-
	Frayed edge……	-	*	-
	Ore not completely covered…….	-	*	-
	Cord out of round……...	-	*	-
	Cords not continuous length, ie., pieced…	X	-	-
Construction and workmanship of plaiting and knotting of cord	Plaiting or knotting is not as specified or not as shown in Figure …….	X	-	-
	Unevenly or loosely plaited or knotted…...	X	-	-
	Straight plaiting has less than 48 or more than 52 plaits…….	X	-	-
	Knot missing or incorrect…….	X	-	-
Construction and workmanship of end loop and buttonhole loop	Loop missing…….	X	-	-
	Loop not securely attached…….	X	-	-
	Tacking not neatly accomplished……	-	-	X
	Stitching thread wrong shade or color, i.e. does not correspond to required color.	-	-	X
	Thread ends not neatly trimmed……	-	-	X
	Loop in wrong location……	-	*	-
Construction and workmanship of ferrule and ring	Ferrule or ring missing……	X	-	-
	Ferrule not securely attached……	X	-	-
	Ring loose on ferrule (ring completely falls away from ferrule when ferrule is inverted)……	X	-	-
	Not correct finish…….	X	-	-
	Not lacquered…….	X	-	-
	Not epoxy……	X	-	-
	Epoxy not correct color…….	X	-	-
Quality of metal	Surface pitted, scaled, dented, nicked, cracked, or scratched……	-	*	-

4.3.2.1.2 Examination for defects in dimension. Any dimension that is not within the specified tolerance shall be classified as defect.

4.3.2.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall follow:

	Inspection Level	AQL Major	AQL Total
For defects applicable to 4.3.2.1.1	II	2-5	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

For defects applicable to 4.3.2.1.2 S-3 (one class) 4.0

4.3.3 Testing of the end item. Testing of the completely fabricated fourragère shall be performed in accordance with Table V for the characteristics specified herein. The sample unit shall be one completely fabricated fourragère. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units. The number of determinations per sample unit shall be one and the results shall be reported as pass or fail.

TABLE V. End Item Testing

Characteristic	Requirement para	Test Method
Length of plaited section and overall length of fourragère	3.5	4.4.4

4.3.4 Examination of count of fourragères in intermediate containers. Fourragères packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of fourragères shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units. The lot size shall be the number of intermediate containers.

4.3.5 Examination of preparation for delivery requirements. An examination shall be made to determine whether applicable packaging, packing, and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item shipping lot. The inspection level shall be S-2 and the AQL be 2.5 defects per hundred units.

Examine	Defects
Marking (exterior and interior	Omitted, incorrect, illegible, or improper size Location, sequence or method application
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as, incomplete closure of case liners, container flaps, loose strapping inadequate stapling Bulging or distorting containers
Content	Number of intermediate packages is more or less than required. 1/

1/ For this defect, 3 intermediate packages shall be examined from each shipping container in the sample.

4.4. Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

4.4.1 Test for end loop and bottomhole loop. After both loops have been completed, a form of 20 pounds shall be applied to the end of each loop separately for a period of one minute. The loop should be examined to determine compliance with 3.5.3.

4.4.2 Chemical composition test. Chemical composition shall be determined in accordance with the test method number 111.1 of ASTM-E1282. Results shall be evaluated to determine compliance with the requirements specified in 3.3.4.

4.4.3 Test for lacquer.

4.4.3.1 Liver of Sulfur Test. Items to be tested shall be immersed in 2 percent by weight CP liver of sulfur (sulfureted potash) water solution at a temperature of 100 degrees F., plus or minus 10 degrees f., for a period of three minutes. The item shall then be removed and rinsed in warm, then cold, then hot water. The item shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture and shall be airdried at room temperature (60 to 80 degrees F.) for an hour. The item shall then be inspected to determine compliance with the requirements specified on 3.4.3.1.

4.4.3.2 Tackiness test. At room temperature (60 to 80 degrees F.) press a piece of tissue paper against the lacquered surface for 15 seconds, using pressure capable of being exerted between thumb and two fingers, after which the pressure shall be released and the item inspected to determine compliance with the requirements specified in 3.4.3.1.

4.4.4 Test for length of plaited section and overall length. The finished fourragère shall not be stretched, or tensioned, prior to testing but shall be suspended vertically under a load of q0 ounces and then measured to determine compliance with 3.5.

4.4.5 Acetone test. The epoxy surface shall be wiped five times with a piece of cotton saturated with acetone. The cotton shall then be examined to determine compliance with 3.4.3.1.1.

4.4.6 Knife test. Draw a knife edge across the face of the ferrule making four parallel across 1/16 inch apart. Repeat this process by drawing the knife edge perpendicular to the previous scores, making small blocks. The finish shall then be examined to determine compliance 3.4.3.11.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the person responsible for packaging activity.

6. NOTES. This section contains information of a general or explanatory nature that may be helpful but is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Fourragère covered by this specification are intended to be worn by military personnel who meet the award criteria established for this decoration

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Type and/or class require (see 1.2).
c. When a guide sample will not be furnished (see 3.1.1).
d. When a standard sample will not be furnished (see 3.1.2).
e. Selection of applicable levels of preservation and packing (see 5.1).

6.3 Subject term (key word) listing.
Acquisition
Acetone
Knife
Liver

6.4 Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.

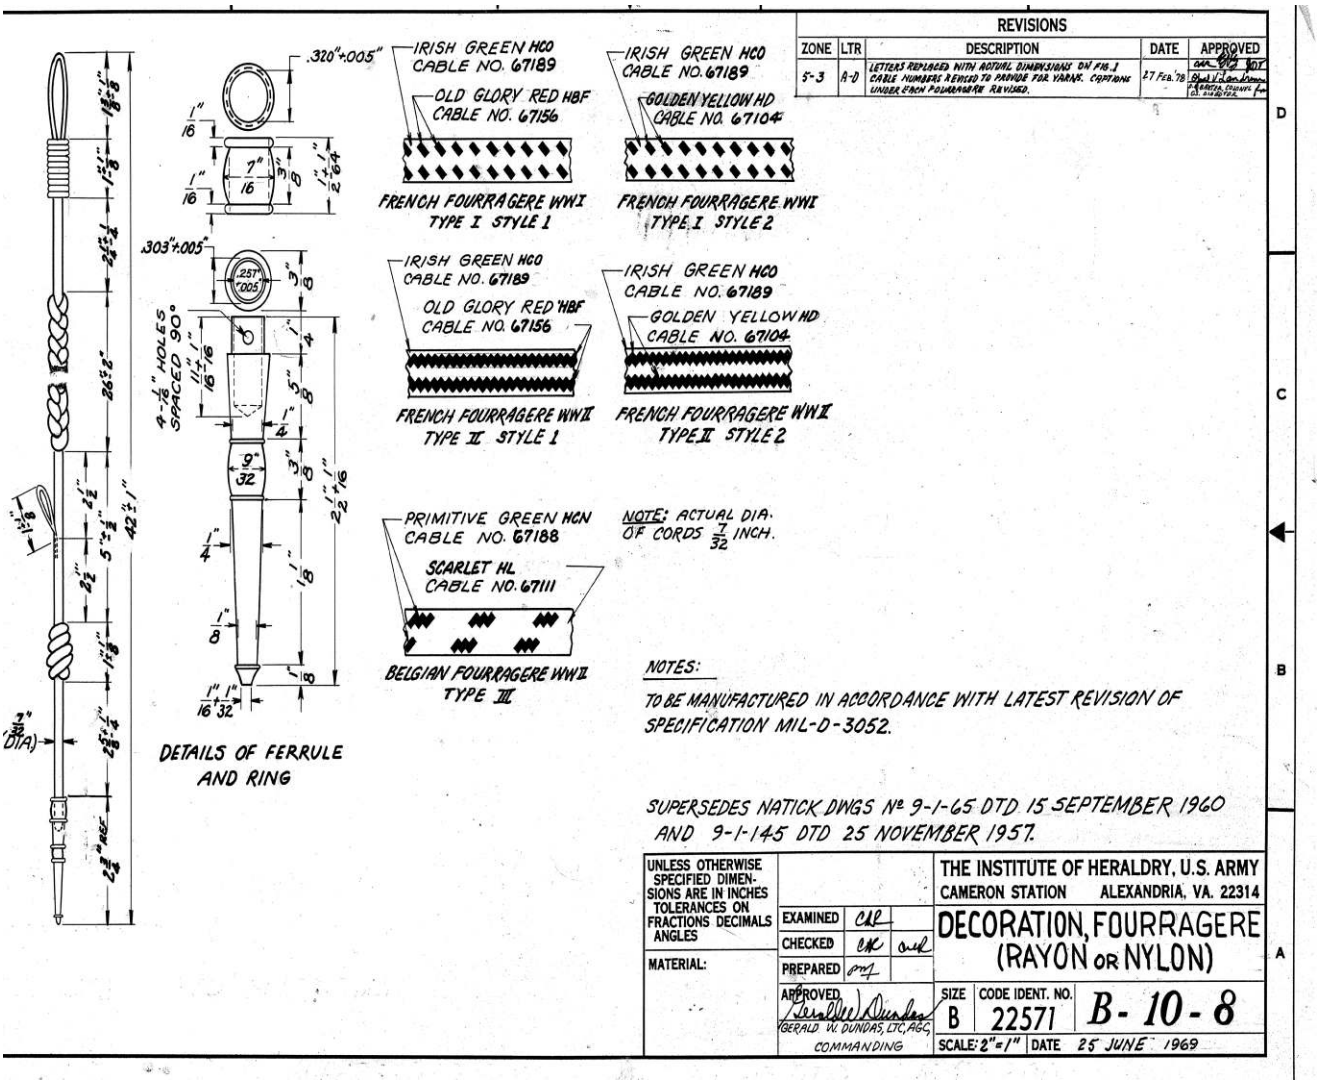


FIGURE 1 **Decoration Fourragère**

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2026-378)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:06Z
Check the source to verify that this is the current version before use.