MIL-P-3003K
7 April 1987
SUPERSEDING
MIL-P-3003J
4 September 1981

MILITARY SPECIFICATION

PONCHO, WET WEATHER, HEAVY DUTY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a heavy duty poncho with hood, of one type and size, for use as a rain garment and other purposes (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-371	-	Braid, Textile Tubular
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Units: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specifications for
MIL-G-16491	-	Grommet, Metallic
MIL-C-40039	-	Cloth, Coated, Nylon, Vinyl Coated

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Container and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the non government documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

specifications, specification sheets or MS standards), the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the document may appear in the sample in which case this document shall govern.

3.2 Materials (see 6.6)

3.2.1 Coated cloth. The coated cloth utilized in fabrication of the poncho shall be cloth, coated, nylon, vinyl coated, conforming to MIL-C-40039.

3.2.2 Thread. The thread for seaming the poncho shall be polyester thread, type I, class 1, sub-class A, sizes AA and B conforming to V-T-285.

3.2.2.1 Color and colorfastness. The thread shall be dyed Olive Drab S-1, C.A. 66022 and no colorfastness requirements shall apply.

3.2.2.2 Thread lubrication. Water and isopropyl alcohol only may be used for lubrication for sewing purposes of the thread or the coated cloth.

3.2.3 Grommets. The grommets shall conform to type II, class 3, sizes 0 and 3 of MIL-G-16491.

3.2.4 Snap fasteners. The snap fasteners shall consist of a socket and stud-eyelet combination conforming to MIL-F-10884 as follows:

(a) The socket shall be construction A, B, C, or D, style 2, finish 2.
(b) The stud-eyelet combination shall be size 1 or 2, style 2, finish 2.

3.2.5 Drawcords. The drawcords shall be braid, textile, dyed Olive Green 107 conforming to type IV, class 3 of MIL-B-371 except that the requirements for color-fastness to laundering shall not apply. The ends of the drawcord shall be either tipped or resin coated.

* 3.2.6 Clamp, cord. The cord shall consist of a lock body and lock wheel. The lock body shall conform to Fastex no. 238-390703-00-5612, Color 6N604, or equal, and the lock wheel shall conform to Fastex No. 238-082051-00-0101, or equal. (See 4.3.1.1 and 6.7).

3.2.7 Reinforcement materials.

3.2.7.1 Snap fasteners and grommet reinforcements. The cloth for reinforcing the grommets and snap fasteners shall be lightly coated cotton cloth weighing a minimum of 7.5 ounces per square yard and having a minimum breaking strength of 75 pounds in both warp and filling. The light coating on both sides

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

shall be accomplished with a polymerized or copolymerized vinyl chloride resin plasticized exclusively with either phosphate or phthalate esters (see 4.3.1.1).

3.2.7.2 Neck seam reinforcment. The cloth used to reinforce the neck seam shall be the coated cloth specified in 3.2.1.

3.2.8 Seam sealent (see 4.3.1.1). The seam sealant used to seal the seams and allowable needle holes shall be a pigmented solvent solution of polymerized or copolymerized virgin vinyl chloride resin utilizing either a phosphate or phthalate ester type plasticizer only. Only acrylonitrile rubber or acrylate additives may be used to increase the working properties of the sealant.

3.2.8.1 Color. The seam sealant, after drying, shall produce a color approximately matching the shade or the coated cloth specified in 3.2.1.

3.2.9 Seam dusting powder. To prevent blocking, all sealant areas shall be dusted. The dusting powder shall be whitening, talc or other finely divided mineral material which does not support mildew growth (see 4.3.1.1).

3.3 Design. The design of the poncho shall conform to figure 1. The poncho shall have sides and ends that are hemmed and shall be equipped with snap fasteners for closing as well as grommets for attached tent pin lines. The poncho shall have a hood with drawcord for face opening adjustment.

3.4 Patterns. Standard patterns shall be furnished by the contracting officer and shall be used only as a guide for cutting working patterns. Standard patterns provide a 1/2 inch allowance for all seams except the side edges of hood facing pieces where 1/4 inch seam allowance is provided and where 3/8 inch seam allowance is provided for separate side and end facings. The patterns show the size and placement of neck opening as well as markings for the proper assembly of all parts. Standard patterns shall not be altered in any manner and working patterns shall not be modified without prior approval of the contracting officer except as outlined in 3.8. The working patterns shall be identical to the standard patterns.

3.4.1 List of pattern parts. The component parts of the poncho, shall be cut from materials as specified in accordance with the pattern parts indicated.

List of Pattern Parts

Materials	Nomenclature	Cut parts
Cloth, coated, nylon, vinyl coated	Neck reinforcement piece	1
	Hood	1
	Hood facing piece	2
	Side piece	2
	Body of poncho	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

3.5 Construction. The construction shall conform in all respects to the requirements specified in table I and herein. Figures 1 and 2 are furnished solely for guidance and information. Should variation from the document appear in figures 1 or 2, the document shall govern.

3.5.1 Care during fabrication. Care shall be taken during fabrication operations, especially during seaming, stitching, and sealing, to insure that the coated cloth area adjacent to the seam is not damaged (see 6.4).

3.5.2 Stiches, seams, and stitches. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams occur. The needle shall be the smallest possible size which can be used with specified thread in order to minimize the size of the hole made in the coated cloth by the needle.

3.5.2.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.5.2.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.2.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Both ends of all seams or stitching produced with 401 stitch type, when not turned under in a hem or held down by other stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. The looper (underthread) shall be on the inside of the poncho. All repairs shall be in accordance with 3.5.2.1.1a and 3.5.2.1.1b. Repairs may be made using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

3.5.3 Sealing of seams and stitching.

3.5.3.1 Sealed areas. All stitching except the peripheral hems and facing piece seams around the face opening of the hood shall be sealed on the inside of the poncho with a minimum of three coats and on the outside with a minimum of one coat of the sealant specified in 3.2.8 except that hem shall not be sealed on the outside. The peripheral hems and the facing piece seams around the face opening of the hood shall not be sealed.

3.5.3.2 Application. The sealant shall be applied in such a manner as not to cause twists, pleats, or puckers on the seam or on the cloth adjacent to the seam. The first coat of sealant on the inside and outside shall be brushed on and worked in such a manner as to completely wet and cover the stitching and needle holes and shall be worked in under any turned edges of the seams. The succeeding coats of sealant may be brushed or squeegeed on. The cement line shall extend not less than 1/4 or more than 1 inch on each side of the seam or stitching. The coats of sealant shall be allowed to dry before the ponchos are folded or before sealed surfaces are allowed to contact any other parts of the poncho or other sealed surfaces. The sealant will be considered as being dry if the ponchos pass the blocking test and visual examination after having been production folded for a period of 1 hour.

3.5.3.3 Dusting. When the coats of sealant are dry, the sealed seams shall be dusted thoroughly with the seam dusting powder specified in 3.2.9. Care shall be exercised that only sealed seam areas are dusted and that dust is not distributed over other areas of the poncho.

3.5.4 Sealed seam area performance requirements.

3.5.4.1 Hydrostatic resistance. The sealed seams and the immediate adjacent area shall pass the hydrostatic test when tested as specified in 4.3.4.

3.5.4.2 Resistance to low temperature flexing. After testing, the seam sealant shall show no cracking, flaking or separation from the coated cloth when subjected to the test specified in 4.3.4.

3.5.4.3 Blocking. The sealed seam shall block no more than Scale Rating No. 3 when tested as specified in 4.3.4.

3.6 Marking. Each poncho shall have a combined contractor and instruction marking located as specified on figure 1. The marking shall be legibly printed directly on the coated cloth with black marking in letters 1/4 inch high and shall contain the following data:

Nomenclature
Stock Number
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Date and number of contract
Multipurpose ponchos
  Rain garment and ground sheet
  Blanket or sleeping bag cover (snap the two long edges together)
  Tent (snap two ponchos together as side walls)
  Floor (third poncho will snap inside tent as a floor)
  Two open tents will go end to end with common center pole

The marking shall retain good legibility and shall show fair fastness to crocking both wet and dry when tested as specified in 4.3.4.

3.7 Repairs on finished poncho. Repairable areas generated during manufacture of the poncho shall be generally defined as follows:

a. Scuffs. Any break in the coated surface (nylon yarns intact) other than a pickoff of the coating or a pinhole.

b. Pinhole. A very small hole in the coating such as might be caused by puncturing the coating with a pin.

c. Needle holes. One or more left in the fabric after removal of the sewing thread.

d. Pick-offs. Areas where the coating is removed from the nylon coated cloth by separation of the plies of material after adhesion of the surfaces to each other.

3.7.2 Repair compound. The repair compound shall be as specified in 3.2.8.

3.7.3 Repair procedure. Each repairable area shall be coated with a minimum of two coats of the repair compound. The first coat of compound shall be brushed in and worked in such a manner as to completely wet and cover the scuff, pinhole, needle, hole or pick-off. The second coat shall be brushed smoothly and evenly over the first coating. The repaired areas, after the compound is dry, shall be lightly dusted with the powder specified in 3.2.9.

3.7.4 Requirements for repaired areas. The repaired areas shall show no stiffening or other defects that would affect the serviceability or the outside appearance of the poncho. The repaired area shall conform to the blocking requirements of the sealed seams specified in 3.5.4.3. The repair compound shall be well adhered to the coated cloth and when it is subjected to a flexing or scrubbing action between the hands shall show no lifting of the edge and no cracking, flaking, or removal of the repair compound.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

3.7.5 Number of repairs.

3.7.5.1 Scuffs. Scuffs in coating not exceeding four in number may be repaired and the size of the repair shall not exceed 2 inches in length and 1 inch in width.

3.7.5.2 Needle holes. Needle hole repairs shall not exceed 2 inches in length and 1 inch in width.

3.7.5.4 Pick-offs. Pick-offs in the coating not exceeding four in number may be repaired and the overall size of such repairs shall not exceed 1/2 inch in diameter.

3.8 Manufacturing operations requirements. The poncho shall be made in accordance with all operations listed in table I, although not necessarily in the same sequential order, utilizing working patterns which have been cut by the contractor to conform with standard patterns. One or both side panels and their joining seams may be eliminated when coated fabric of sufficient width is available. No part of the poncho shall be cut less than 1/2 inch from the beginning of the coating on an untrimmed edge of the coated cloth. The poncho shall conform to the finished measurements shown on figure 1. Stitches, seams, and stitching shall be in conformance with the requirements of 3.5.2. and sealing of seams and stitching shall be in conformance with 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut poncho. a. The lightly coated side of the material shall be on the outside of the poncho. b. The coated cloth shall be carefully laid in uniform widths and lengths and care shall be taken in spreading the material. The plies shall not be stretched or pulled and one side of the lay shall be even. c. All component parts of the poncho shall be cut out of the material in such a manner as to assure that they harmonize with each other in shade, except the hood facing, neck reinforcement piece, side and end facings, and neck binding strip. d. The neck binding may be strip cut and shall be cut on the bias, 3/4 inch to 7/8 inch wide. e. Side and end facings shall be cut with sufficient seam allowance to fit a standard folder and shall finish 1-1/4 inches to 1-3/4 inches wide. The facings may be cut on a stripping machine. f. All snap fastener and grommet reinforcement pieces shall be cut of sufficient length and width to reinforce the surrounding area. The reinforcement pieces for the side and end grommets shall be of sufficient width to be caught in the double stitching of the facings. The reinforcement for the side fasteners and grommets may be cut in a continuous strip. g. Cut hood drawcord 46 ± 1 inches long.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut poncho. (cont'd)						
	h. The use of drill holes is prohibited except for marking the position of the center hem grommets.						
2.	Replacement of damaged parts.						
	a. All parts containing material defects shall be replaced at time of cutting.						
	b. Component parts containing damages such as needle chews, scissor knife cuts, tears, or holes shall be replaced before sewing.						
	c. There shall be no replacement of parts or removal or replacement of stitching after assembly of the finished poncho.						
3.	Join side pieces to poncho.						
	Seam the long sides to body poncho with a double lapped, double stitched seam 1/4 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	9-12 9-12	B B	B AA	
4.	Hem sides and ends of poncho.						
	a. All snap fasteners and grommets on the sides and ends of the poncho shall be reinforced and the reinforcement pieces may be stitched in the hem in one operation. The reinforcement pieces shall be inside the hem between the body and facing and caught in each row of stitching.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Hem sides and ends of poncho. (cont'd)						
	or						
	b. The sides and ends of the poncho shall be faced with a strip of self material, the raw edges turned in and double stitched with stitching 1/16 to 1/8 inch from turned edges. The facing shall finish 1-1/2 ± 1/4 inches wide.	301 or 401	LSm-2 LSm-2	9-12 9-12	B B	B AA	
	or						
	c. The sides and ends of the poncho may have grown-on hem as indicated by pattern. The ends shall be turned to the inside with the raw edge turned in and the hem stitched, 1/16 to 1/8 inch from each turned edge. Hem shall finish 1-1/2 ± 1/4 inches wide.	301 or 401	LSd-1 OSf-1	9-12 9-12	B B	B AA	
	d. Close open ends of hems and facing in line with hem stitching.	301	SSa-1	9-12	B	B	
5.	Grommets.						
	Eight grommets, size No. 3, reinforced, shall be inserted in the four hems and centered in the hems located as follows: (a) One in each corner; (b) One in each hem equidistant from the corners (1 inch tolerance permitted).						
6.	Snap fasteners.						
	The snap fasteners shall be inserted in both long hems as shown on figure 1, and shall be spaced 8-3/4 inches apart starting 6 inches from the center line of						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Snap fasteners. (cont'd)						
	the center grommets. There shall be no prepunched holes for inserting the snap fasteners. When the poncho is folded in half either way, the snap fasteners shall correspond without gaping along the side seams when fasteners are snapped together.						
7.	Attach neck reinforcement piece.						
	Position the neck reinforcement piece on poncho with the upper edges even with the neck opening. Seam the lower edge of reinforcement piece through poncho with the stitching 1/16 to 1/8 inch from edge.	301	SSa-1	9-12	B	B	
8.	Make hood.						
	The backseams shall be joined with a double lapped and double stitched seam 1/4 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	9-12 9-12	B B	B B	
9.	Join hood facing pieces.						
	a. The hood facing shall consist of left and right facing pieces of the basic fabric.						
	b. Seam ends of left and right pieces at the back and at the front.	301	SSa-1	9-12	B	B	
10.	Position and attach hood grommets.						
	Mark position and attach two No. 0 grommets through reinforcement pieces and front of hood as indicated by marks on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Seam facing to front of hood.						
	a. Seam facing to front edge of hood to form tunnel for face drawcord. Thread drawcord through grommets with drawcord crossing between grommets inside the facing.	301	SSa-1	9-12	B	B	
	b. Thread ends of drawcord through slide keeper and knot ends.						
	c. Position drawcord around periphery of hood.						
	d. Turn down the facing over drawcord, turning the edge and single stitch 1/8 inch from edge, forming the face tunnel; the face drawcord tunnel shall finish 3/4 to 7/8 inch wide.	301	LSd-1	9-12	B	B	
	or						
	e. The back edge of hood facing may be hemmed prior to the seaming operation.	301	EFa-1	9-12	B	B	
	f. The joining seam at the top of facing shall be positioned on, or adjacent to the hood joining seam. The joining seam at the bottom of facing shall be centered between the face drawcord grommets at the front. A 1/2 inch off center tolerance is allowed for both positions.						
12.	Join hood to neck of poncho.						
	a. Seam hood to neck of poncho through neck reinforcement piece and binding strip 1/4 to 3/8 inch seam allowance.	301	SSa-1	9-12	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Join hood to neck of poncho.						
	b. Turn hood over first stitching and then fold binding strip around and under the edges of the neck neck reinforcement and hood and raise stitch 1/16 to 3/32 inch from folded edge through all plies of the material as shown on figure 2.	301	(Figure 2a shows finished seams)	9-12	B	B	
	or						
	c. Seam hood to neck of poncho through neck reinforcement piece and binding strip with a folder.	301	BSb-1	9-12	B	B	
	d. Turn hood under bound edges of first seam and top stitch through hood 1/16 to 3/32 inch from the edge of bound seams.	301	(Figure 2b shows finished seams)	9-12	B	B	
13.	Sealing of seams.						
	All seams and stitching shall be sealed as specified in 3.5.3.						
14.	Cleaning.						
	All ends of threads shall be trimmed and loose threads removed from ponchos; all spots and stains shall be removed.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

3.9 Dimensions. The dimensions of the finished poncho and location of snap fasteners and grommets shall be as indicated on figure 1. The hood shall be 18 ± 1/2 inches in height and 15-1/2 ± 1/2 inches in width. Measurements shall be taken as indicated in 4.3.3. Tolerance for measurement of distance between side peripheral hem snap fasteners and grommets shall be 1/4 inch.

3.10 Workmanship. The poncho shall conform to the quality of the product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.3 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

4.3.1.1 Component and material certification. A certificate of compliance will be accepted as evidence that the components and materials listed below conform to the requirements specified.

Component	Requirement paragraph
Thread lubrication	3.2.2.2
Cord clamp	3.2.6
Reinforcement material (fastener and grommet)	3.2.7.1
Seam sealant	3.2.8
Seam dusting powder	3.2.9

4.3.2 End item visual examination. The end item shall be examined for the defects listed in table II. The lot size shall be expressed in units of poncho's. The sample unit shall be one poncho. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A defects combined, and 65.0 for total (major, minor A, and minor B) defects combined.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Cleanness:				
	Any spot or stain clearly noticeable		X	
	Thread ends not trimmed throughout poncho.			X
	Excessive seam dusting powder distributed over exterior area of poncho.			X
Components and assembly:				
	Any component omitted.	X		
	Any component misplaced, damaged, defective, or not firmly affixed to such a degree that:			
	- Serviceability is seriously affected.	X		
	- Serviceability is affected but not seriously.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Component and assembly: (cont'd)				
	Any required operation omitted or improperly performed to such a degree that:			
	- Serviceability is seriously affected.	X		
	- Serviceability is affected but not seriously.		X	
Drawcord:				
	Length of hood drawcord too short not allowing face opening to be fully extended.	X		
	Any end not tipped or resin coated.			X
	Any drawcord omitted or caught in tunnel stitching.	X		
	Any end not knotted.			X
Grommets:				
	Omitted, broken, bent, or not securely clinched:			
	- One grommet.		X	
	- Two or more grommets	X		
	One or more too tightly clinched cutting fabric.	X		
	One or more having sharp or rough edge.	X		
	Not clinched through reinforcement when applicable:			
	- One or two grommets.		X	
	- Three or more grommets.	X		
	Any not completely on hem.	X		
Label marking:	Label marking missing, incorrect, or illegible.		X	
	Not located as specified.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages:				
	Not specified color or definite variation in color.			X
	Any blister.	X		
	Lump exceeding 1/4 inch in in diameter or a number of lumps of any size within a square foot area.		X	
	Hard permanent creases or wrinkles.	X		
	Any area of thin or heavy coating.		X	
	Uneven coating resulting in sharply contrasting shade areas of heavy warpwise lines.		X	
	Any uncoated area.	X		
	Any imbedded foreign material which when removed will expose base cloth.	X		
	Any imbedded foreign material which cannot be readily removed or if removable does not expose base cloth.		X	
Workmanship damages:				
	Needle chews.	X		
	Any mend, cut, or hole in other than hem area.	X		
	Any mend, cut, or hole in hem area:			
	- Less than 3/16 inch in length or diameter.		X	
	- 3/16 inch or more in length or diameter.	X		
	Any tear or burn.	X		
	Any scuff, pinhole, pick-off, or needle hole uncoated.	X		
	Repair compound on fabric cracks, lifts, or flakes when flexed or scrubbed.		X	
	Any repaired area not dusted.		X	
	More than four scuffs repaired.			X
	Any scuff repair exceeding 2 inches in length and 1 inch in width.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Workmanship damages: (cont'd)				
	More than eight pinholes repaired.			X
	Any pinhole repair exceeding 3/4 inch in length or width.			X
	Any needlehole repair exceeding 2 inches in length and 1 inch in width.			X
	More than four pick-offs repaired.			X
	Any pick-off repair area exceeding 1/2 inch in diameter.			X
	NOTE: Material defects and workmanship damages to the coating of the coated cloth shall be determined by visual examination using through-lighting on the finished poncho. The through-lighting equipment shall conform to the following requirements: A table with a clear glass top, lighted with a minimum of two parallel 25 watt fluorescent bulbs spaced 5 to 6 inches apart (distance between bulbs). The top of the glass shall be 9 to 10 inches above the top of the bulbs. The inside of the light housing shall be painted flat white. The table, sides, and ends shall be 6 to 8 inches from the from the bulbs. The table shall be used in a darkened area. The darkened area shall be defined as follows: The surface to be examined shall be illuminated with not more than 25 foot candles or artificial or natural light with the test lights out (see 6.5). The poncho shall be examined with the outside of the poncho towards the table light.			
Sealing of seams and stitching:				
	Any seam or stitching required to be sealed, not properly sealed, i.e., sealant not under the turned edge of seam or does not completely cover the stitching or any needle hole.	X		
	Color of sealant does not approximate that of the coated cloth.			X
	Sealant not dusted (to be scored only when the condition exists on the major portion of the seam).		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Sealing of seams and stitching: (cont'd)				
	Sealant cracks or flakes when creased. 1/	X		
	Sealant tacky. 1/	X		
	Seam badly twisted, pleated, or puckered when the condition is caused by improperly performed sealing operation. 1/	X		
	Sealant extending less than 1/4 inch or more than 1 inch on either side of seam (to be scored only when condition exists on major portion of seam).			X
	Sealant blocked to the extent that unfolding of the poncho results in breaking of sealant or pick-offs of coating from the fabric. 1/	X		
Accuracy of seaming:				
	Seams badly twisted, pleated, or puckered.	X		
	NOTE: A characteristic of nylon is to show a certain amount of puckering at seams or stitching. This puckering is not to be classified as a defect.			
	Part of garment caught in any unrelated operation or stitching.			X
	Ends of all stitching not caught in other seams or stitching not securely back-stitched.			X
	Wrong shade of thread markedly in contrast with color and shade of poncho.			X
	Gage of stitching on edge, raised, or double needle stitching irregular, i.e., unevenly gaged or stitching not uniform.			X
	Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	Stitching less than 1/16 inch from edge resulting in damage to the material.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Open seams:				
	Open seam at peripheral hem or at hood facing piece:			
	- More than 1/4 inch but not more than 1 inch.		X	
	- More than 1 inch.	X		
	Any other seam open:			
	- More than 1/8 inch but not more than 1/2 inch.		X	
	- Open more than 1/2 inch.	X		
	NOTE: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam. On double stitched seams, a seam is considered open when one or both sides of the seam is open.			
	Raw edges (when edge is required to be turned under and stitched) on peripheral hem of poncho or facing of hood:			
	- More than 1/2 inch but not more than 1 inch.			X
	- More than 1 inch.		X	
	NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.			
Run-offs:				
	Joining seam - when resulting in an open seam use open seam classification. (No defect when not resulting in an open seam.)			
Seam and stitch types:				
	Looper thread located on outside of poncho when 401 stitch type is used.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Stitch tension:				
	Loose tension in any area of peripheral hem or facing of poncho:			
	- More than 1 inch but not more than 2 inches.		X	
	- More than 2 inches.	X		
	Tight tension (stitches break when normal strain is applied to the seam or stitching).	X		
Stitches per inch (to be scored only when the condition exists on the major portion of the seam):				
	Less than minimum specified:			
	- One stitch.			X
	- Two or more stitches.		X	
	More than maximum specified:			
	- Two stitches.			X
	- Three stitches.		X	
	- Four or more.	X		
Snap fastener:				
	Stud or socket omitted, defective, improperly clinched, or having rough or sharp edges.	X		
	Stud and socket reversed, i.e., placed on side opposite to side indicated on figure 1.	X		
Hood:				
	Drawcord not crossed between grommets.		X	
	Drawcord slide keeper omitted.		X	
	Hood joining seam not through reinforced piece.		X	
	Binding not covering neck seam.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Table II End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Peripheral hem:				
	Width less than 1-1/4 inches or more than 1-3/4 inches.		X	

1/ Poncho drawn for examination for these defects shall have been production folded for packing for a minimum of 1 hour.

4.3.3 End item dimensional examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of ponchos. The sample unit shall be one poncho. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Examine	Defect
Poncho body	Length less than 90-1/2 inches or more than 93 inches. Width less than 65 inches or more than 67 inches.
NOTE:	Length measurement is taken from end to end along center of poncho. Width measurement is taken from edge to edge. Height of hood measurement is taken with the hood folded in half, along face opening from top folded edge to seam joining hood to neck of poncho. Half width of hood measurement is taken with hood folded in half from back folded edge to front folded edge at point in line with lower edge of face opening.
Hood	Height less than 17-1/2 inches or more than 18-1/2 inches in length. Width less than 15 inches or more than 16 inches in length.
Hem strap fasteners	Measurement of location of any snap fastener from another snap fastener or center grommet varies from measurement specified on figure 1 by more than 1/4 inch.
Hem grommets	Center hem grommets not equidistant from corner grommets by more than 1 inch.
Hood drawcord	Hood drawcord less than 45 inches or more than 47 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

4.3.4 End item testing. The methods of testing specified in FED-STD-191, whenever applicable and as listed below shall be followed. All tests are applicable to the individual sample unit. The lot size shall be expressed in units of one poncho. The sample unit shall be one completely fabricated poncho. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, for each characteristic to be tested shall be 6.5.

Characteristic	Requirement reference	Test Method	Number of determinations per sample unit
Sealed seam area, hydrostatic resistance	3.5.4.1	4.4.1	7
Sealed seam sealant: Resistance to low temperature flexing	3.5.4.2	4.4.2	1
Resistance to blocking	3.5.4.3	4.4.3	1
Colorfastness and legibility of labels	3.6	5651	1

4.3.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Contents	Number of intermediate containers per shipping container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Examine	Defect
	Number of ponchos per intermediate container is more or less than required. 1/

1/ For this defect, one intermediate container from each shipping container in the sample shall be examined.

4.3.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.4 Methods of inspection.

4.4.1 Determination of hydrostatic resistance of sealed seam area. The seam area of the fabricated poncho, sample unit, shall be tested without cutting or otherwise damaging the poncho.

4.4.1.1 Apparatus. The apparatus shall be as described in Method 5514 of FED-STD-191, except that means shall be provided to assure a fixed hydrostatic head of 50 centimeters by a cut-off valve or other suitable device at the water inlet of the upper orifice place. The valve arrangement shall assure that the specimen is not subject to water pressure before being firmly clamped into the apparatus and the required 50 centimeter level attained. An outlet shall be provided in the upper orifice plate to permit the escape of air displaced by the water entering the space above the clamped specimen.

4.4.1.2 Procedure. With the cut-off valve closed, the specimen shall be clamped into ring device so that the seam is centered in the 4-1/2 inch test area and so that the water pressure is applied to the outside of the seam. The water level shall be adjusted to yield a hydrostatic head of 50 centimeters. After adjustment of the water level, the valve shall be opened and the water

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

level maintained at 50 centimeters for 10 minutes. During the 10 minute exposure period, the under side of the specimen shall be observed by use of the mirror attachment for any water penetration over any of the 4-1/2 inch diameter test area.

4.4.1.3 Report. Test shall be run on the finished poncho at seven different locations as follows: Two evenly spaced the length on one side panel joining seam, two on the center hood seam, and three on the side seam joining the hood to the neck of the poncho. The seven determinations shall be reported separately as pass or fail. A failure is defined as the appearance of water at three or more different places within the 4-1/2 inch diameter test area of any single determination.

4.4.2 Determination of low temperature flexibility of sealed seam sealant. Method 5874 of FED-STD-191 shall be followed except that the test for hydrostatic resistance shall not be performed. The poncho (test specimen) shall be exposed for 35 ± 5 minutes at a temperature of 0 ± 5°F and tested immediately thereafter without removal from the low temperature test chamber. The long side joining seam of the poncho shall be folded back on itself 180 degrees so that the sealed seam surfaces are superimposed. The roller weight shall be passed along the fold and across the seam. Any cracking, flaking, or separation of sealant shall be classified as a failure.

4.4.3 Determination of resistance to blocking. Method 5872 of FED-STD-191 shall be followed except that the test specimen shall be one completely fabricated poncho prepared by folding the poncho so that two inside sealed seam surfaces and the two outside sealed seam surfaces are superimposed and are in the center of the glass plates.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each poncho laid flat shall have the length folded in half twice, with the hood inside the fold, to a folded dimension of approximately 23 inches. The width shall be folded in twice from each end toward the center in increments of approximately 13 inches resulting in a completely folded poncho measuring approximately 23 inches by 14 inches. Five folded ponchos shall be packed flat with each one reversed in an intermediate fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 200 of PPP-B-636. The outside dimensions of each box shall be 23-1/4 inches in length, 14-1/2 inches in width, and 3-3/4 inches in depth. Box closure will be secured with 2-1/2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

* 5.1.2 Commercial. Ponchos shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A packing. Twenty ponchos preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth, within the shipping container. Inside dimensions of each shipping container shall approximate 23-1/4 inches in length, 14-1/2 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.3.5. Towards the end of the contract or when there are less than the same amount per container of the same size, mixed sizes may be packed within the same container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to non-metallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Twenty ponchos preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth, within the shipping container. Inside dimensions of each shipping container shall approximate 23-1/4 inches in length, 14-1/2 inches in width, and 15 inches in depth. Approximate dimensions are funished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.3.5. Towards the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.3.5.

* 5.2.3 Commercial packing. Ponchos preserved as specified in 5.1 shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), ponchos packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 32 in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract, intermediate packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951 as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

* 5.4.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The poncho is intended to be used as a rain garment, ground sheet, blanket, sleeping bag cover, or shelter half.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this document.
b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
c. Type and class of unit load required (see 5.2.1).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Sample. For access to sample, address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Fabrication operations. Experience has shown that sewing machine speeds up to 3200 stitches per minute will result in a more efficient sewing operatio and higher quality stitching and seaming on this type of fabric (see (3.5.1).

6.5 Illumination of test surface. An instrument found suitable for determining the illumination of the test surface (see 4.3.2) is Weston Illumination Meter, Model 756, made by Daystrom, Incorporated, Weston Instrument Division, Newark, NJ 07114.

6.6 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

* 6.7 Clamp, Cord. A source of supply for clamp, cord, lock body and lock wheel specified in 3.2.6 is available from Fastex Division, Illinois Tool Incorporated, 1996 Algonquin Road, Des Plaines, IL 60016.

6.8 Subject term (key word) listing.

Poncho
Wet Weather

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

* 6.9 Changes from previous issue. The margins of this document have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever of any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
Navy - MC
DLA - CT

User activity:


Navy - SH, OS


Preparing activity:

Army - GL

Project No. 8405-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

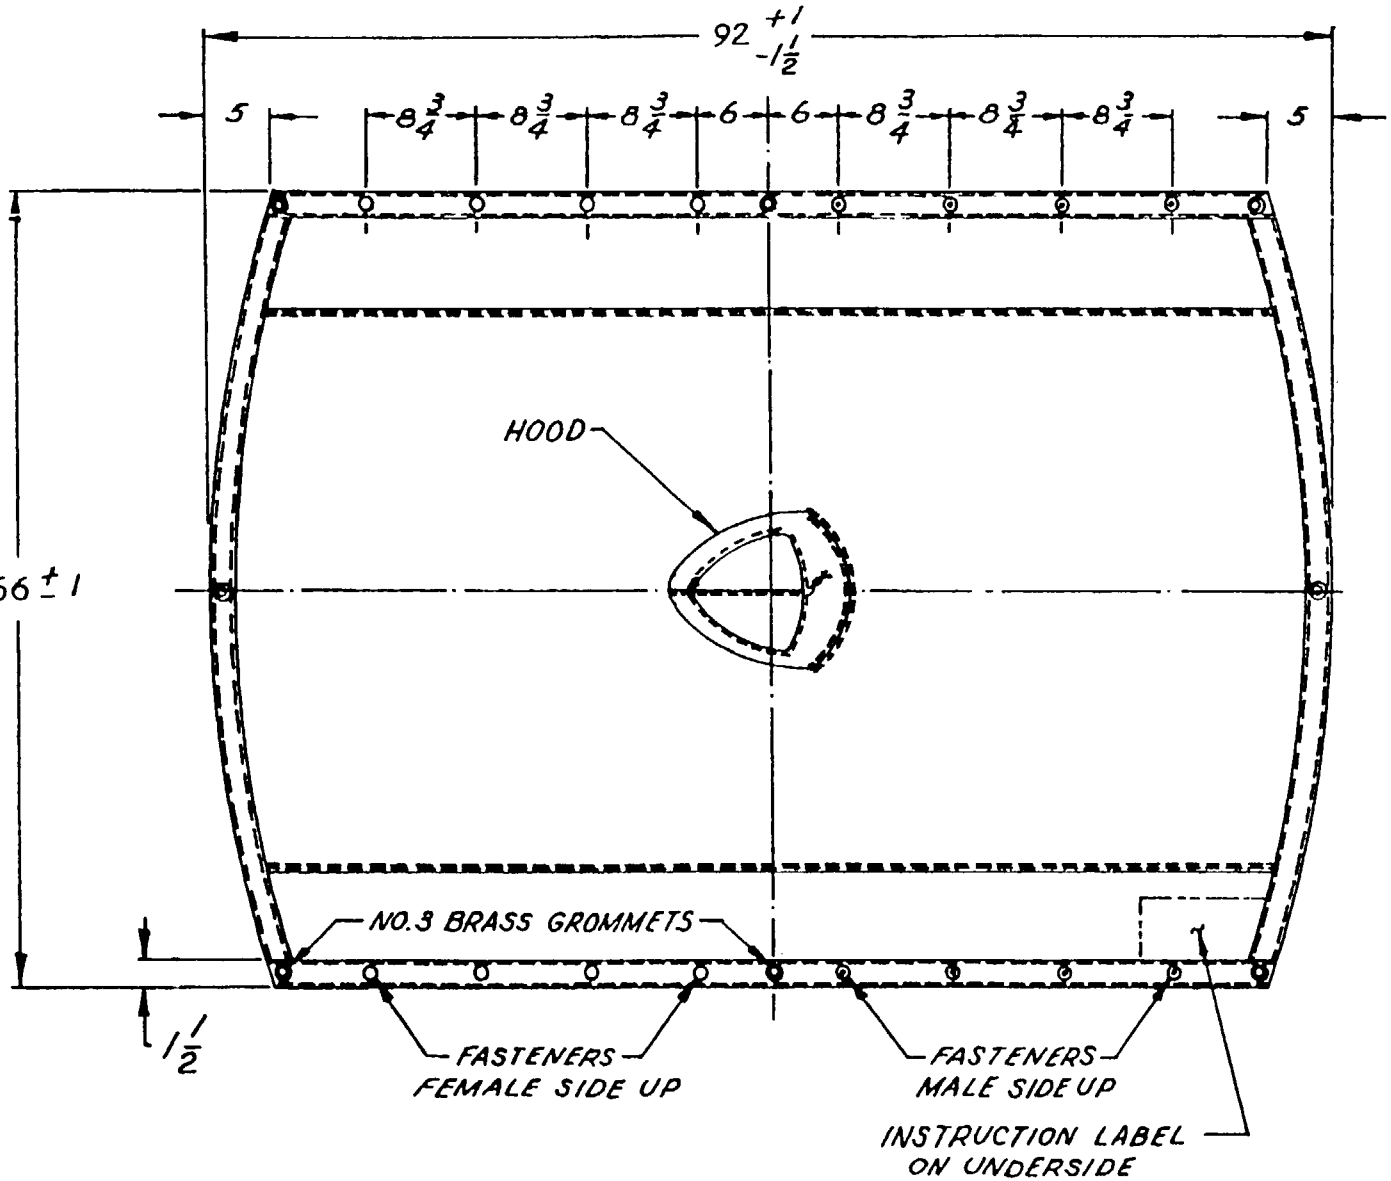

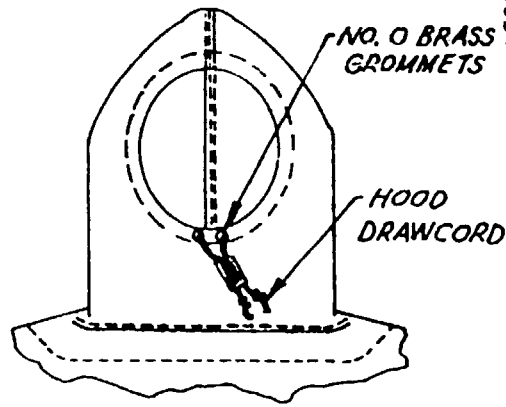


HOOD DETAILS

NOTE:
HOOD CAN BE WORN OVER HELMET


FIG. 1 PONCHO, WET WEATHER, HEAVY DUTY

2-1-1574

Source: https://assist.dla.mil - Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

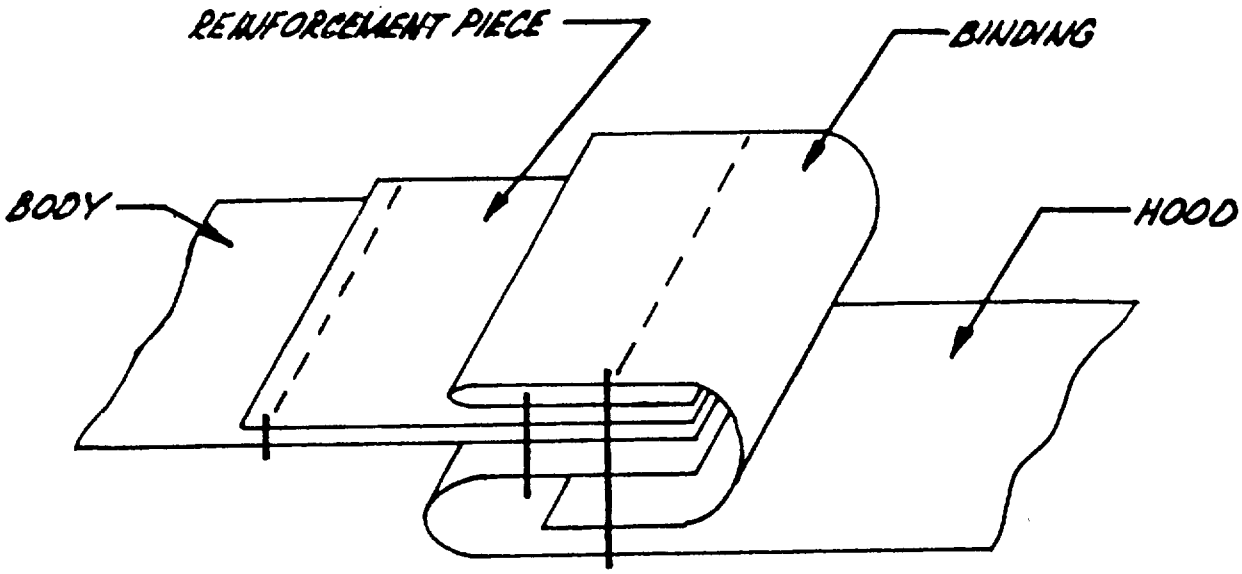

(a)

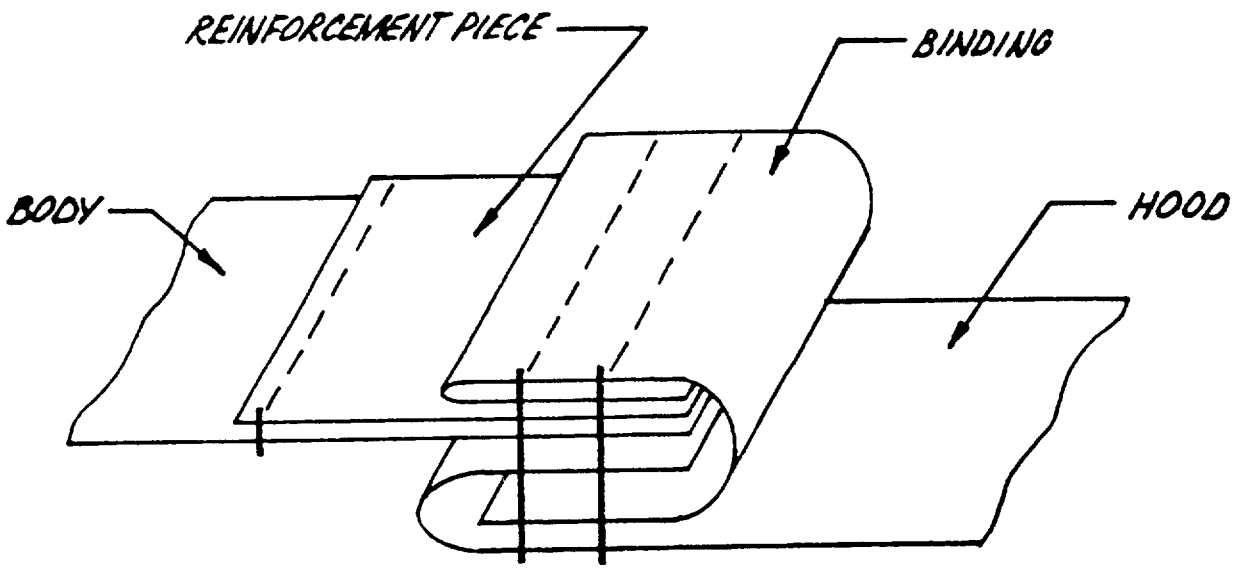

(b)

HOOD-NECK JOINING SEAM (OPERATION 12)

FIG. 2 - PONCHO, WET WEATHER, HEAVY DUTY

DWG. NO. 2-1-1575

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

TRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in mitting comments and suggestions for improvements. All users of military standardization documents are invited to provide estions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and led. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the blems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an nowledgement will be mailed to you within 30 days to let you know that your comments were received and are being sidered.

TE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

'ARTMENT OF THE ARMY

. ARMY NATICK RESEARCH, DEVELOPMENT
ınd ENGINEERING CENTER
'N: STRNC-ES
ick, MA 01760-5014

:ICIAL BUSINESS
ALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-3003K	PONCHO, WET WEATHER, HEAVY DUTY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:00Z
Check the source to verify that this is the current version before use.