MIL-E-23683A(OS)
24 June 1976
Superseding
MIL-E-23683(OS)
19 April 1963

MILITARY SPECIFICATION
EXPLOSIVE FITTING MARK 19 MOD 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the procurement of the Explosive Fittings Mark 19 Mod 1 (empty) and Mark 19 Mod 1 (loaded), LD 516150 and LD 516153, respectively. The explosive Fitting Mark 19 Mod 1 is of one type and one class.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issue in effect on the date of invitiation of bids, form a part of the specification.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-454	Standard General Requirements for Electronic Equipment

DRAWINGS

NAVAL SEA SYSTEMS COMAND

LD 516150	Explosive Fitting Mark 19 Mod 1 (empty)
LD 516153	Explosive Fitting Mark 19 Mod 1 (explosive loaded)
DL 2416949	Container, Inner, Explosive Fitting, Mark 19 Type
LD 548040	Actuator, Explosive, Mark 22 Mod 0

NSC 1350-Empty
NSC 1351-Loaded

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

2267168 DL 2416950	Vibration Fixture Container, Shipping, Explosive Fitting Mark 19 Type

Unless otherwise specified, all drawings called out herein are listed on LD 516150 or LD 516153.

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND

WS-2090	Actuator, Explosive, Mark 22 Mod 0

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.

DEPARTMENT OF DEFENSE

DOD 4145.26M	DOD Contractors' Safety Manual for Ammunition, Explosives and Related Dangerous Material

CODE OF FEDERAL REGULATIONS

49 CFR 171-178	Transportation, Interstate Commerce Commission, Explosive and Other Dangerous Articles

(The Interstate Commerce Commission regulations are now a part of the Code of Federal Regulations available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Applications for copies should be mailed to the above address. Orders for the above publication should cite 49 CFR 171-178, latest edition and supplement thereto.)

NATIONAL BUREAU OF STANDARDS PUBLICATION

HANDBOOK H28	Screw Thread Standards for Federal Services

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 Description. The Explosive Fitting Mark 19 Mod 1 is a hexagonal explosive-loaded housing threaded at one end for mechanically connecting with a mating component. From the other end of the housing extends a length of two-conductor cable terminating in a pair of phone tips by way of which a firing voltage is applied to the fitting. The explosive element of the fitting is the Explosive Actuator Mark 22 Mod 0 which is secured by potting within the threaded end of the housing. The electrical leads of the actuator connect within the housing to the terminals of the cable. A binding post spring, placed upon the phone tips of the cable after loading of the fitting, serves to maintain the fitting in an electrically safe condition until removal of the clip prior to mounting of the fitting for service use.

3.2 First article sample. Unless otherwise specified in the contract or order, a first article sample of the fittings shall be manufactured and prepared for delivery using the methods and precedures proposed for the production lot. The sample is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of producing items that comply with this specification and the design. The sample size shall be as specified in the contract or purchase order.

3.3 General requirements.

3.3.1 Fabrication. Materials, finishes, coatings, construction, and dimensions for the Explosive Fitting Mark 19 Mod 1 (empty) and Explosive Fitting Mark 19 Mod 1 (loaded) shall be in accordance with the requirements of LD 516150 and LD 516153, respectively. Examination shall be in accordance with 4.7.

3.3.2 Interchangeability. Component parts of assembled units (unless otherwise specified on the applicable drawings) fabricated in accordance with applicable drawings shall assemble with mating components of the unit without selection for fit or performance.

3.3.3 Threads. Unless otherwise specified, all threads shall be in accordance with the National Bureau of Standards Handbook H28.

3.3.4 Soldering. Soldering shall be in accordance with Requirement 5 of MIL-STD-454.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

3.4 Performance requirements and product characteristics. The fittings shall meet the following performance requirements and product characteristics:

3.4.1 Empty assembly. The following requirements shall pertain to the components of the explosive fitting prior to their assembly as the explosive-loaded device.

3.4.1.1 Cleanliness. All components of the empty explosive fitting shall, at the time of acceptance, be completely clean of corrosion, metal chips, oil, grease, dirt, dust, or the like. Any agent used in cleaning shall not damage the surfaces of the components or leave a contaminating residue.

3.4.1.2 Cable assembly. After potting the Shell, Drawing 2289314, and molding it to the cable in accordance with Drawing 2289986, the shell shall withstand a five-pound pull for a minimum of ten seconds without separating or slipping.

3.4.2 Loaded assembly. The requirements of 3.4.2.1 through 3.4.2.7 pertain to the loaded explosive fitting.

3.4.2.1 Cleanliness. All components of the explosive fitting shall be free of dust, oil, grease, metal chips, filings, moisture, corrosion, and such other forms of contamination.

3.4.2.2 Explosive actuator. The Explosive Actuator Mark 22 Mod 0 shall have met acceptably all requirements of WS 2090 within 6 months prior to its assembly within the Explosive Fitting Mark 19 Mod 1; documentary proof thereof shall be submitted with each lot of explosive fittings tendered for acceptance.

3.4.2.3 Insulation resistance. The insulation resistance between the shorted terminals of the explosive fitting and the housing shall be 50 megohms or greater when measured at 500 $\pm$ 50 volts DC. This requirement shall be met after conditioning the explosive fitting for no less than 24 hours at a temperature of 78°F $\pm$ 2°F and a relative humidity of 75 $\pm$ 5 percent.

3.4.2.4 Bridge wire resistance. The bridge wire resistance, when measured at the phone tips of the assembled explosive fitting, shall be between 8 and 13 ohms.

3.4.2.5 Leakage. After assembly and potting, the explosive fitting shall be capable of withstanding a 100 PSIG hydrostatic pressure applied for no less than five minutes without leakage or detrimentally affecting its electrical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

3.4.2.6 Binding post spring. Immediately following the loading operation, the leads of the explosive fitting shall be shorted by the Binding Post Spring, Drawing 1853142. The binding post spring shall remain on the fitting except during electrical testing and then be replaced until the fitting is installed for service use. When mounted in the binding post spring, each phone tip shall withstand an axial pull of no less than 2 pounds without pulling free from the binding post spring.

3.4.2.7 Function. The Explosive Fitting Mark 19 Mod 1 shall function when the first discharge of a 1.0 microfarad capacitor charged to 40.0 ± 1.0 volts DC is applied across the phone tips of the fitting.

3.5 Environmental requirements.

3.5.1 Vibration. The loaded explosive fitting shall meet the requirements of 3.4.2.3 through 3.4.2.6 after being subjected to the vibration test of 4.8.1.

3.5.2 Shock. The loaded explosive fitting shall meet the requirements of 3.4.2.3 through 3.4.2.6 after being subjected to the shock test of 4.8.2.

3.5.3 Temperature and humidity. The loaded explosive fitting, packaged as in 5.1, shall meet the requirements of 3.4.2.3 through 3.4.2.6 after being subjected to one 14-day JAN TEMPERATURE AND HUMIDITY CYCLE in accordance with MIL-STD-331, Test Method 105.1.

3.5.4 Jolt requirement. The loaded explosive fitting shall not fire or become unsafe when subjected to the jolt test of MIL-STD-331, Test Method 101.1.

3.6 Cleanup. All parts, components, and the assembly shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign matter.

3.7 Workmanship. Workmanship shall be in accordance with Requirement 9 of MIL-STD-454.

3.8 Safety precautions. The supplier shall observe the safety precautions of DOD 4145.26M, as applicable.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the explosive fitting shall be classified as follows:

a. First article inspection (see 4.4)
b. Quality conformance inspection (see 4.5)
c. Periodic production sample inspection (see 4.6)

4.3 Test equipment. The following items of test equipment are required to perform the tests prescribed in this specification:

a. An ohmmeter or resistance bridge capable of measuring resistances between 8 ohms and 13 ohms, accuracy within 0.1 ohm (current limited to 5 milliamperes maximum).

b. A megohm bridge capable of measuring 50 $\pm$ 5 megohms, accuracy 5 percent, at a test voltage of 500 $\pm$ 50 volts DC.

c. A test chamber into which the explosive fitting may be placed to be appropriately tested safely. The test chamber shall provide adequate protection to the operator in the event that the fitting fires. The contact resistance between each receptacle of any connector of the test chamber and a mating pin shall not exceed 0.1 ohm.

d. Pressure pot capable of withstanding a 100 PSIG hydrostatic pressure.

e. A scale including a suitable means for pulling on the phone tips and capable of measuring a 2-pound pull to an accuracy of $\pm$ 1 ounce.

f. A resistance bridge capable of measuring a resistance of .02 ohm to an accuracy of 1 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

g. Saline solution prepared as follows: The salt used shall be sodium chloride containing on the dry basis not more than 0.1 percent of sodium iodide, and not more more than 0.2 percent of total impurities. The solution shall be prepared by dissolving 3 ± 0.1 parts by weight of salt in 97 ± 5 parts by weight of distilled or other water containing not more than 200 parts per million of total solids. The solution shall be kept free from solids by filtration or decantation. The solution shall be adjusted to and maintained at a specific gravity of from 1.0111 to 1.0258 and at a pH of 6.5 to 7.2 when measured at a temperature between 92°F and 97°F. Only C.P. Hydrochloric Acid or C.P. Sodium Hydroxide shall be used to adjust the pH.

h. Distilled water of sufficient quantity to neutralize the saline solution on the contract quantity of explosive fittings.

i. A five-pound weight with suitable means for attaching to the cable pins.

4.4 First article inspection.

4.4.1 First article sample. First article sample approval will be granted when the Government testing activity, through testing and subsequent analysis of the test results, is assured of contractor conformance to the contract technical requirements. Conditional acceptance may be granted at the option of the Government based on analysis of detected defects. A first article sample may be disapproved when either noncomforming characteristics or unauthorized materials are found. (See 6.2b and table I.)

4.5 Quality conformance inspection (See notes, table I).

4.5.1 100% inspection. Each unit shall be subjected to the examinations and tests designated as 100% in 4.7. Any unit containing one or more defects shall be cause for regrading the unit as defective.

4.5.2 Sampling. Tests designated as sampling shall be conducted on a random sample of fittings selected from each production lot (see 6.3.2) in accordance with MIL-STD-105, inspection level II, AQL of 1.0 percent defective. Unless otherwise specified (see 6.2f), a production lot shall consist of one month's production. Lot composition shall be in accordance with MIL-STD-105, Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.6 Periodic production inspection. (see 6.2e)

4.6.1 Periodic production samples. Periodic production tests specified in table I shall be conducted on a random sample of explosive fittings selected by the Government from each lot (see 6.2f) of explosive fittings offered for acceptance. The sample size shall be as specified in the contract or purchase order (see 6.2g). When a unit fails to pass any periodic production test, such failure shall be cause for rejection of the periodic production sample and the lot it represents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

TABLE I - INSPECTION PROCEDURES

Title of examination or Test	Requirement Paragraph	Method Paragraph	INSPECTION CLASSIFICATIONS First (1) (7) Article	Quality (7) Conformance	Periodic (1) (7) Production
Preparation for delivery	5	4.7.1	1	(2)	1
Visual	3.3, 3.4.1.1, 3.4.2.2, 3.6, and 3.7	4.7.2.1, 4.7.2.2, 4.7.2.3 and 4.7.3.2	2 (3)	(2)	2 (3)
Cable assembly	3.4.1.2	4.7.2.4	3	(2)	3
Insulation resistance	3.4.2.3	4.7.3.3.1 and 4.7.3.3.3	4	(2)	4
Bridge wire resistance	3.4.2.4	4.7.3.3.2	5	(2)	5
Leakage	3.4.2.5	4.7.3.3.3	6	(2)	6
Binding post spring	3.4.2.6	4.7.3.4	7	(2)	7
Function	3.4.2.7	4.7.3.5	(5) (6)	(2) (4)	(5) (6)
Environmental					
a. Vibration	3.5.1	4.8.1	(5) (6)		(5) (6)
b. Shock	3.5.2	4.8.2	(5) (6)		(5) (6)
c. Temperature and humidity	3.5.3	4.8.3	(5) (6)		(5) (6)
d. Jolt	3.5.4	4.8.4	(5) (6)		(5) (6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

TABLE I NOTES

(1) Inspection shall be performed in successive numerical order (1 through 7) for the first article and periodic production sample, except as noted in (6).

(2) Quality conformance inspection shall be an in-process function performed during assembly of the explosive fitting prior to preparation for delivery by the manufacturer. The sequence of inspection shall be at the discretion of the manufacturer.

(3) These inspections shall be performed as applicable without disassembly of the fittings.

(4) These tests may be performed as necessary by the manufacturer to verify manufacturing techniques.

(5) The quantities subjected to this test shall be determined by the designated Government testing activity.

(6) The sequence for performing these tests may be altered by the designated Government testing activity.

(7) Unless otherwise specified in the procurement document, the following acceptance quality levels (AQL) apply to the tests of table I designated as critical or major in section 4.7:

Critical	0.0 percent defective
Major	1.0 percent defective
Minor	2.5 percent defective

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.7 Examination and test methods

4.7.1 Preparation for delivery. The packaging shall be examined to determine conformance to 5 herein.

4.7.2 Explosive fitting test (empty). The following examination and tests pertain to the components of the Explosive Fitting Mark 19 Mod 1 before mounting therein any explosive element.

4.7.2.1 Visual examination (Sampling). Visually and dimensionally examine in accordance with Drawing 2289984 to determine compliance with the appropriate drawings (see 3.3.1) and this specification.

4.7.2.2 Soldering examination (Sampling). Prior to soldering the wires to the connector, examine the subassembly to determine that all connections are mechanically secure. After soldering, examine the subassembly to determine that all excess flux and solder spatter have been removed.

4.7.2.3 Cleanliness examination (Sampling). Verify that there are no burrs or sharp edges and no visual evidence of moisture, corrosion, or other contamination of the assembled explosive fitting.

4.7.2.4 Cable assembly (Sampling). Following the potting and molding procedure specified on Drawing 2289986, suspend the cable with the pins down. Attach a five-pound weight to the pins for ten seconds. Verify that there is no separation or slipping of the shell.

4.7.3 Explosive fitting test (loaded). The following tests pertain to the loading procedures and loaded explosive fitting.

CAUTION: No electrical test of any kind shall be performed upon the loaded explosive fitting without the fitting first being inclosed within a suitable test pot or shielded to prevent injury to the operator should inadvertent firing of the fitting occur.

4.7.3.1 Explosive actuator acceptability (Sampling). Verify from documentary evidence submitted with each lot the acceptance date of each lot of explosive actuators tested in accordance with WS 2090. Explosive actuators which have not met the requirements of WS 2090 within 6 months are not acceptable for assembly into explosive fittings.

4.7.3.2 Cleanliness examination (Sampling). Immediately prior to loading, examine all unassembled components of the explosive fitting. Verify that no moisture, corrosion, dirt, grease, oil, metal chips, filings, or the like are present.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.7.3.3 Resistance tests.

4.7.3.3.1 Insulation resistance (100%) (C1). Condition the explosive fitting at a temperature of 75 ± 2°F and a relative humidity of 75 ± 5 percent for a period of 24 hours. Within one hour after removal of the fitting from the conditioning environment, install the fitting in the test chamber, item 4.3c. Using the megohm bridge, item 4.3b., measure the insulation resistance between the two leads shorted by the binding post spring and the shell of the connector at a relative humity of 60 percent minimum. Verify that the insulation resistance is in excess of 50 megohms. Insulation resistance of the fittings may be measured at ambient temperatures above 70°F and relative humidity above 70 percent to facilitate production; however, fittings with insulation resistance less than 50 megohms shall be regarded defective only after having been subjected to the above specified temperature-humidity conditioning and then exhibiting insulation resistance of less than 50 megohms.

4.7.3.3.2 Bridge wire resistance (100%) (M103). Install the explosive fitting into the test chamber, item 4.3c. Remove the binding post spring from the phone tips. Using the ohmmeter, item 4.3a, measure the resistance at the phone tips. Verify that the resistance is not less than 8 or more than 13 ohms. Reinstall the binding post spring on the phone tips and remove the fitting from the test chamber.

4.7.3.3.3 Leakage test (100%) (C2). Fill the pressure pot, Item 4.3d, with a saline solution prepared as specified in 4.3g. Install the explosive fitting in the pressure pot with the phone-tip end of the cable exposed to air and the cable sealed by a watertight packing gland. Apply 100 PSIG hydrostatic pressure to the pressure pot and maintain the pressure for five minutes. After five minutes, measure the insulation resistance between each lead of the explosive fitting cable and the pressure pot, using the megohm bridge, item 4.3b. Verify that the resistance is not less than 50 megohms. Release the pressure. Remove the fitting from the pressure pot and immediately remove the saline solution from the fitting with distilled water. Remove the excess distilled water with a compressed air jet.

4.7.3.4 Binding post spring (100%) (C3). Test the tightness of the binding post spring on the phone tips by applying a two-pound pull alternately to each of the tips, using the scale, item 4.3e, while the binding post spring is held firm. Verify that neither phone tip pulls free of the binding post spring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.7.3.5 Function (M104). Place the fitting behind a barricade which will provide adequate protection to personnel. Use a firing circuit as depicted in figure 1. Connect the fitting to connector S-1 of figure 1. Turn the ON-OFF switch to ON. Adjust the variable resistor R-5 to furnish 40.0 volts to capacitor C-1 as indicated on meter M-1 of figure 1. Close switches SW-2 and SW-3. Verify that the fitting fires upon the closure of switches SW-2 and SW-3.

4.8 Environmental tests. (After the tests of 4.8.1 through 4.8.3, verify that the fittings pass the tests of 4.7.3.3.1 through 4.7.3.5.)

4.8.1 Vibration. The loaded explosive fitting shall be rigidly fastened directly to the vibration table by means of the Vibration Fixture, Drawing 2267168. Simple harmonic excitation shall be applied parallel to each of the three principle axes of the explosive fitting for equal periods of time. The frequency range from 10 to 60 Hz may be covered either by slowly cycling at a logarithmic rate between the limits, or by at least 24 discrete frequency steps which have a logarithmic distribution. The vibration amplitude shall be maintained at 2 $\pm$ .2g or 0.10 $\pm$ .01 inch (peak-to-peak), whichever is the lesser. The duration of the test in each direction is four hours. The total test duration shall be 12 hours.

4.8.2 Shock. The explosive fittings shall be subjected to a continuous two-phase shock applied along the axis of the explosive fitting toward the connector plug end of the assembly.

a. The first (impact) phase shall consist of a change in velocity of 5.5 to 7.0 feet per second taking place in from 0.2 to 0.4 millisecond.

b. During the second (drag) phase, the explosive fitting shall be accelerated for a minimum time of 15 milliseconds in such a manner that a minimum average acceleration of 90 gravity units is attained and the peak acceleration is between 125 and 150 gravity units.

4.8.3 Temperature and humidity. Subject the fitting to one 14-day JAN TEMPERATURE AND HUMIDITY CYCLE in accordance with MIL-STD-331, Test Method 105.1.

4.8.4 Jolt test. After being subjected to the tests of 4.8.1 and 4.8.2, mount the explosive fitting within the Jolt Fixture, Drawing 2263358, and subject the fitting to the jolt test defined in MIL-STD-331, Test Method 101.1. Verify that the fitting does not fire or become unsafe during the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

4.9 Classification of Characteristics. The characteristics verified by the tests and examinations herein are classified as critical, major, or minor. The tests and examinations that verify critical characteristics are identified by the symbol (C) and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of the test or examination. Tests and examinations which are not annotated with a classification code are classified minor.

4.10 Safety precautions. The safety precautions specified in DOD 4145.26M shall be observed during loading, assembly, testing, and handling operations. The use of DOD 4145.26M shall not be construed as to relieve the contractor or manufacturer of responsibility for the safety of his operations.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Level A.

5.1.1.1 Inner container. Explosive fittings shall be packaged in accordance with DL 2416949.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Code of Federal Regulations. Packing shall be in accordance with Code of Federal Regulations 49 CFR 171-178.

5.2.1.2 Shipping container. Explosive fittings packaged in accordance with paragraph 5.1.1.1 shall be packed in a shipping container in accordance with DL 2416950.

5.3 Marking. In addition to any special marking required by the contract or order, all marking shall conform to the requirements of MIL-STD-129 and Code of Federal Regulations 49 CFR 171-178.

6. NOTES

6.1 Intended use. The explosive fitting is intended for use in the universal drill kit and the nonservice mine program.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.

b. Number of first articles required. (3.2., 4.4.1)

c. That the standards of workmanship exhibited by the previously approved production sample shall be used to determine the minimum requirements of the current contract relative to workmanship, when first article sample requirements are waived because of having been submitted on a recent contract. (3.7)

d. Test equipment to be loaned by the Government, and the terms under which it is loaned, if appropriate.

e. Activity to perform first article and periodic production sample testing, if other than contractor. (4.4 and 4.6)

f. Lot size for sampling purpose, if one month's scheduled production is not acceptable. (4.6)

g. Number of units in the periodic production sample.

6.3 Definitions. The following terms are used throughout this specification and are here defined for clarity.

6.3.1 Explosive fitting. Reference herein to the fitting, unit, or assembly shall be understood to mean the Explosive Fitting Mark 19 Mod 1.

6.3.2 Lot. Unless otherwise specified in the contract or purchase order, lot size shall mean one month's scheduled production. See Section 5, MIL-STD-105, for lot composition.

6.4 The design and technical cognizance for the explosive fitting specified herein are located at the Naval Mine Engineering Facility, Yorktown, Virginia 23691

Custodian:
Navy - OS


Preparing Activity
Navy - OS

Review Activities
Navy - OS

Project Number:
1351-N011

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.

NOTE: SWITCH 3 SHOWN IN THE EXPLOSIVE ACTUATOR SHORT POSITION. IT SHALL REMAIN IN THAT POSITION WHILE CONNECTING THE EXPLOSIVE ACTUATOR TO CONNECTOR S-1.

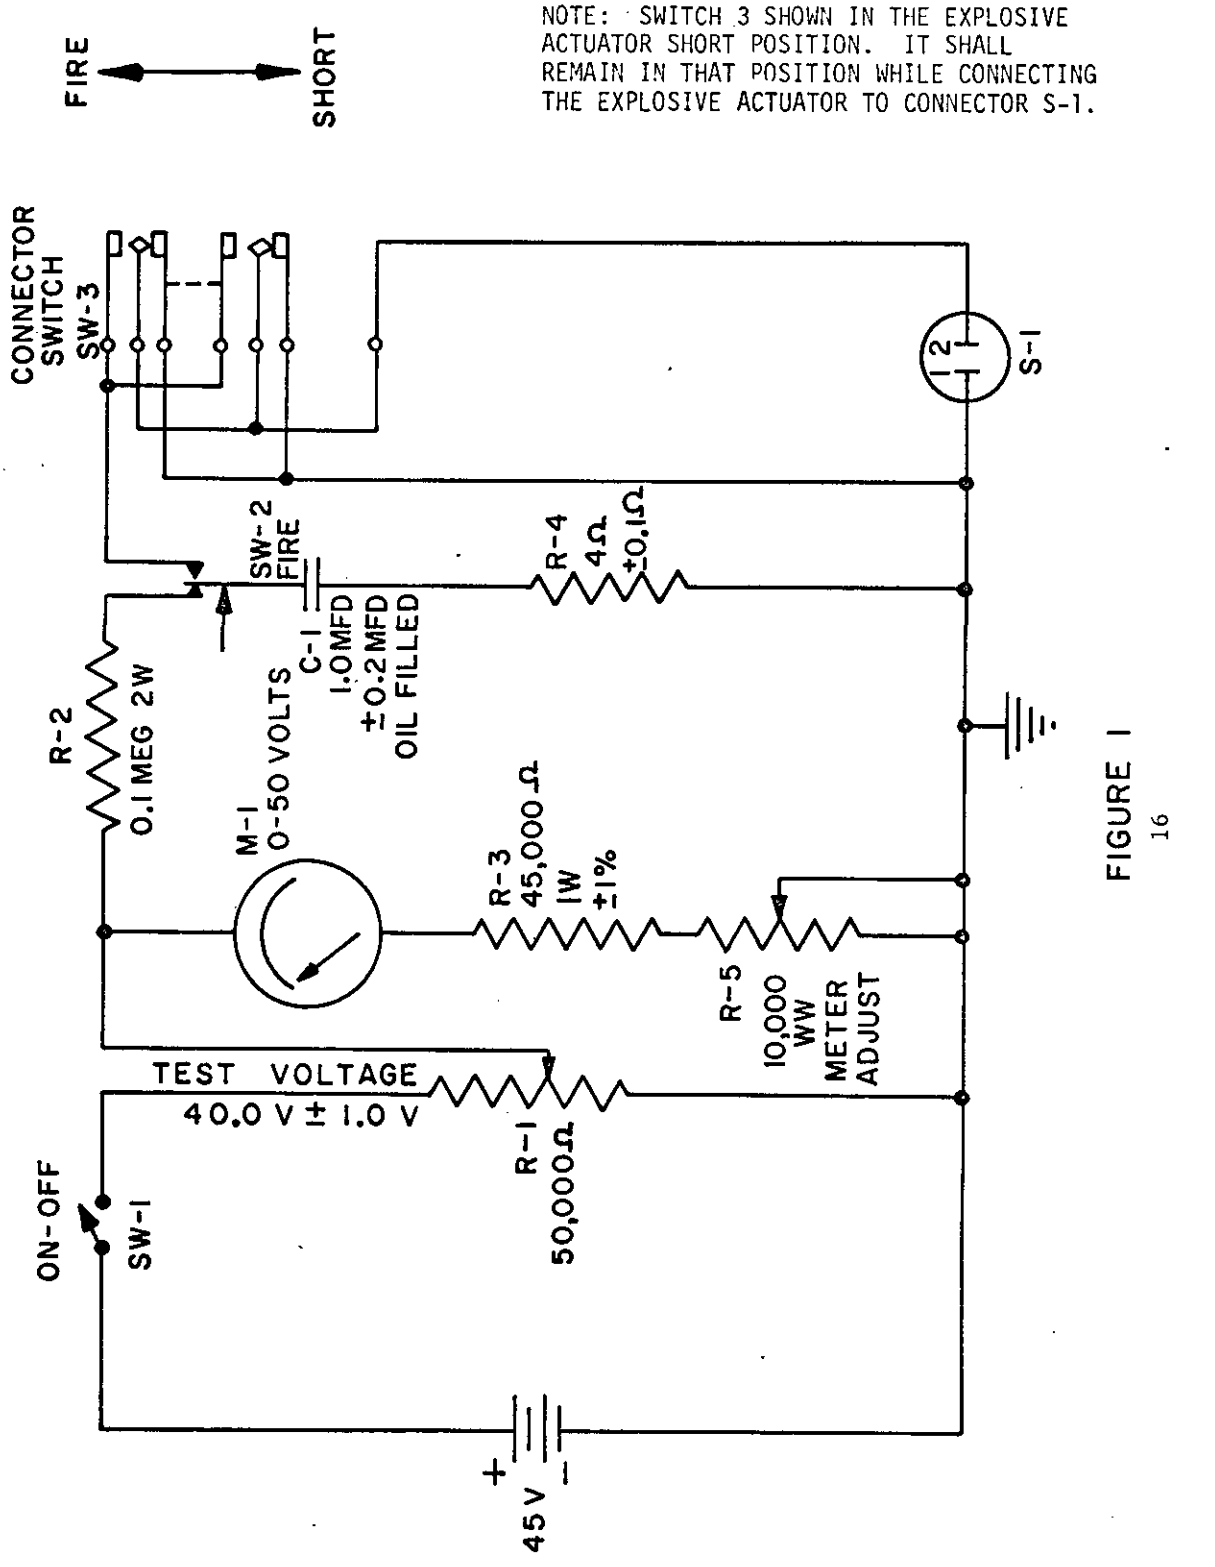

FIRING CIRCUIT

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this js the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-E-23683A(OS), Explosive Fitting Mark 19 Mod 1

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:38Z
Check the source to verify that this is the current version before use.