The documentation and process conversion measures necessary to comply with this document shall be completed by 19 September 2008.

INCH POUND

MIL-PRF-19500/317M
19 June 2008
SUPERSEDING
MIL-PRF-19500/317L
18 November 2005

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING,
TYPES 2N2369A, 2N3227, 2N4449, 2N2369AU, 2N3227U, 2N2369AUA, 2N3227UA,
2N2369AUB, 2N2369AUBC, 2N3227UB, AND 2N3227UBC, JAN, JANTX, JANTXV, JANS, JANSM, JANSD,
JANSP, JANSL, JANSR, JANSF, JANSG, JANSH JANHCA, JANHCB, JANKCA, JANKCB,
JANKCM, JANKCD, JANKCP, JANKCL, JANKCR, JANKCF, JANKCG, AND JANKCH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

* 1.1 Scope. This specification covers the performance requirements for NPN, silicon, high speed switching transistors (including dual devices). Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500, and two levels of product assurance are provided for each unencapsulated device type. Provisions for radiation hardness assurance (RHA) to four radiation levels is provided for JANTXV, JANS, JANHC, and JANKC product assurance levels. RHA level designators “M”, “D”, “P“, “L”, “R”, “F’, “G” and “H” are appended to the device prefix to identify devices, which have passed RHA requirements.

* 1.2 Physical dimensions. See figure 1 (TO-18) for 2N2369A and 2N3227, figure 2 (TO-46) for 2N4449, figure 3 for UB version, figure 4 for UBC, figure 5 for UA version, figure 6 for U version (dual devices), and figures 7 and 8 (JANC die).

* 1.3 Maximum ratings. Unless otherwise specified, T_A = +25°C.

Types	P_T T_A = +25°C	P_T T_C = +125°C	P_T T_{SP} = +125°C	V_{CBO}	V_{EBO}	V_{CEO}	V_{CES}	$R_{\theta JA}$	$R_{\theta JC}$	$R_{\theta JSP}$	T_J & T_{STG}
	W	W	W	V dc	V dc	V dc	V dc	°C/W	°C/W	°C/W	°C
2N2369A,	0.36 (1)	0.36 (4)		40	4.5	15	40	400	200		-65
2N4449	0.36 (1)	0.36 (4)		40	6.0	20	40	400	200		to
2N3227	0.36 (1)	0.36 (4)		40	4.5	15	40	400	200	210	+200
All UA	0.36 (1, 5)		0.36 (4)	40	4.5	15	40	400 (5)		210	
All UB	0.36 (1, 5)		0.36 (4)	40	6.0	20	40	400 (5)		210	
UBC	0.36 (1, 5)		0.36 (4)	40	6.0	20	40	400 (5)		210 (2)	
All U	0.5 (4)		0.36 (2)	40	4.5	15	40	350 (5)			

(1) Derate linearly 2.06 mW/°C above T_A = +25°C.
(2) One side only, derate linerly 2.06 mW/°C above T_{SP} =+25°C.
(3) Derate linearly 3.44 mW/°C above T_A = +54.5°C.
(4) Derate linerly 2.06 mW/°C above T_C =+125°C.
(5) Mounted on FR-4 PCB (1 Oz. Cu) with contacts 20 mils larger than package pads.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil/.

AMSC N/A FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, T_A = +25°C.

Type (1)	h_{FE2} (2) V_{CE} = 0.4 V dc I_C = 30 mA dc		h_{FE4} (2) V_{CE} = 1.0 V dc I_C = 100 mA dc		$\|h_{FE}\|$ V_{CE} = 10 V dc I_C = 10 mA dc f = 100 MHz		$V_{CE(sat)1}$ I_C = 10 mA dc I_B = 1 mA dc	t_{on} I_C = 10 mA dc I_{B1} = 3 mA dc I_{B2} = -1.5 mA dc	t_{off} I_C = 10 mA dc I_{B1} = 3 mA dc I_{B2} = -1.5 mA dc	t_s I_C = 10 mA dc I_{B1} = I_{B2} = 10 mA dc
	Min	Max	Min	Max	Min	Max	V dc Max	ns	ns	ns
2N2369A	30	120	20	120	5.0	10	0.20	12	18	13
2N3227	40	250	30	150	5.0	10	0.20	12	25	18
2N4449	30	120	20	120	5.0	10	0.20	12	18	13

(1) Electrical characteristics for the U, UA, UB, and UBC suffix devices are identical to the corresponding non-suffix device.
(2) Pulsed (see 4.5.1).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS


3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

Ltr.	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD	.016	.021	0.41	0.53	7,8
LL	.500	.750	12.70	19.05	7,8,13
LU	.016	.019	0.41	0.48	7,8
L_1		.050		1.27	7,8
L_2	.250		6.35		7,8
P	.100		2.54		5
Q		.030		0.76	5
TL	.028	.048	0.71	1.22	3,4
TW	.036	.046	0.91	1.17	3
r		.010		0.25	10
α	45° TP		45° TP		6

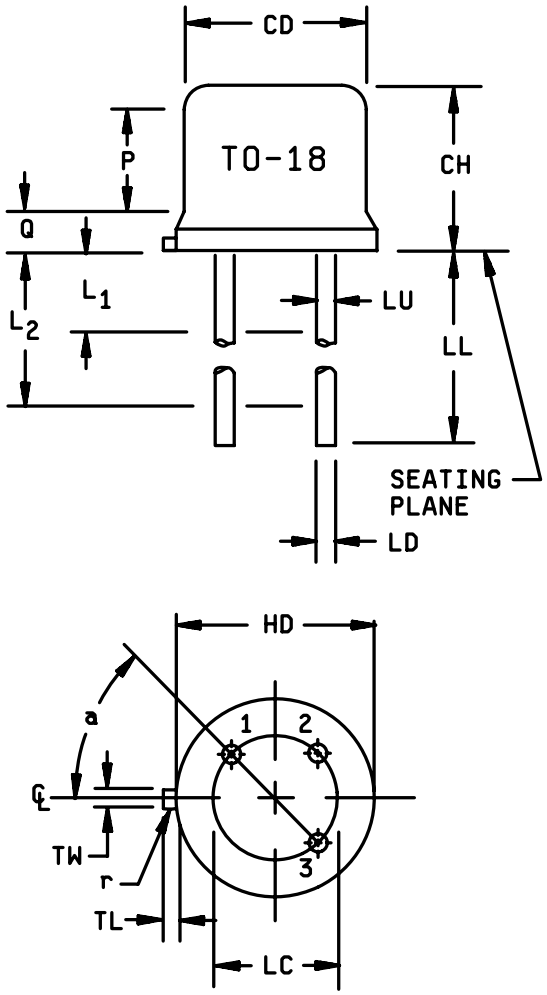


NOTES:
1. Dimension are in inches.
2. Millimeters are given for general information only.
3. Beyond r (radius) maximum, TH shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The collector shall be internally connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
12. Lead 1 = emitter, lead 2 = base, lead 3 = collector.

FIGURE 1. Physical dimensions TO-18 2N2369A and 2N3227.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.


Ltr.	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.065	.085	1.65	2.16	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		5
LD	.016	.021	0.41	0.53	
LL	.500	1.750	12.70	44.45	6
LU	.016	.019	0.41	0.48	6
L_1		.050		1.27	6
L_2	.250		6.35		6
Q		.040		1.02	3
TL	.028	.048	0.71	1.22	8
TW	.036	.046	0.91	1.17	4
r		.010		0.25	9
α	45° TP		45° TP		5

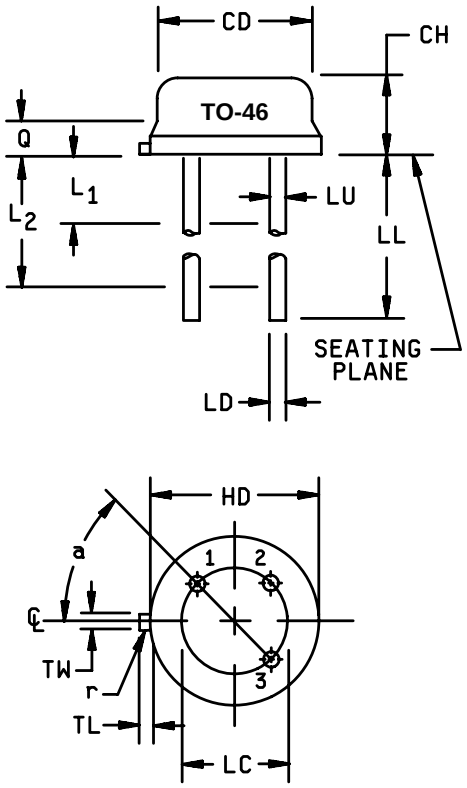


NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Symbol TL is measured from HD maximum.
4. Details of outline in this zone are optional.
5. Leads at gauge plane .054 inch (1.37 mm) +.001 inch (0.03 mm) -.000 inch (0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of TP relative to tab. Device may be measured by direct methods or by gauge.
6. Symbol LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum.
7. Lead number three is electrically connected to case.
8. Beyond r maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
9. Symbol r applied to both inside corners of tab.
10. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
11. Lead 1 is emitter, lead 2 is base, and lead 3 is collector.

FIGURE 2. Physical dimensions - TO-46 2N4449.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

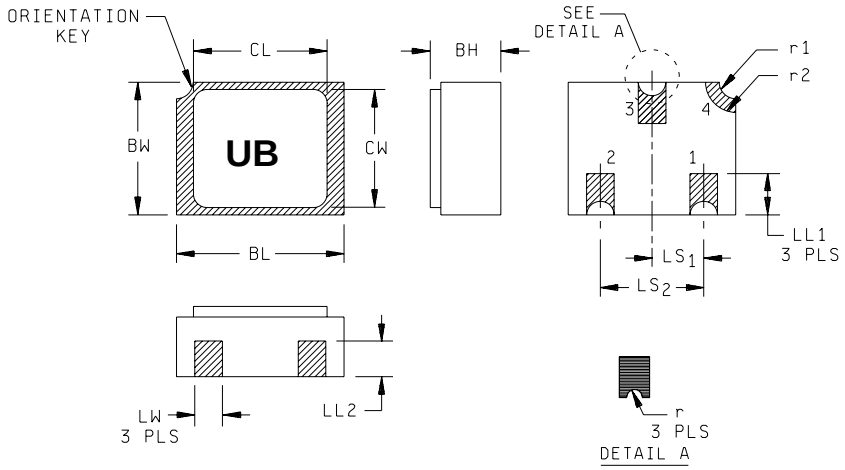

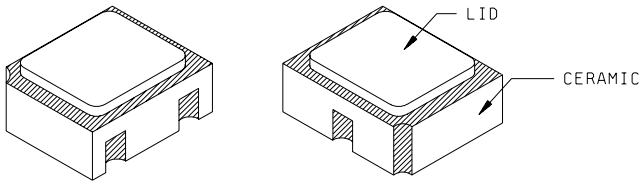


Ltr.	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BH	.046	.056	1.17	1.42	
BL	.115	.128	2.92	3.25	
BW	.085	.108	2.16	2.74	
CL		.128		3.25	
CW		.108		2.74	
LL_1	.022	.038	0.56	0.96	
LL_2	.017	.035	0.43	0.89	
LS_1	.036	.040	0.91	1.02	
LS_2	.071	.079	1.81	2.01	
LW	.016	.024	0.41	0.61	
r		.008		.203	
r1		.012		.305	
r2		.022		.559	

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Hatched areas on package denote metallized areas.
4. Lid material: Kovar.
5. Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the lid.
6. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 3. Physical dimensions - surface mount (UB version, 2N2369AUB, 2N3227UB).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

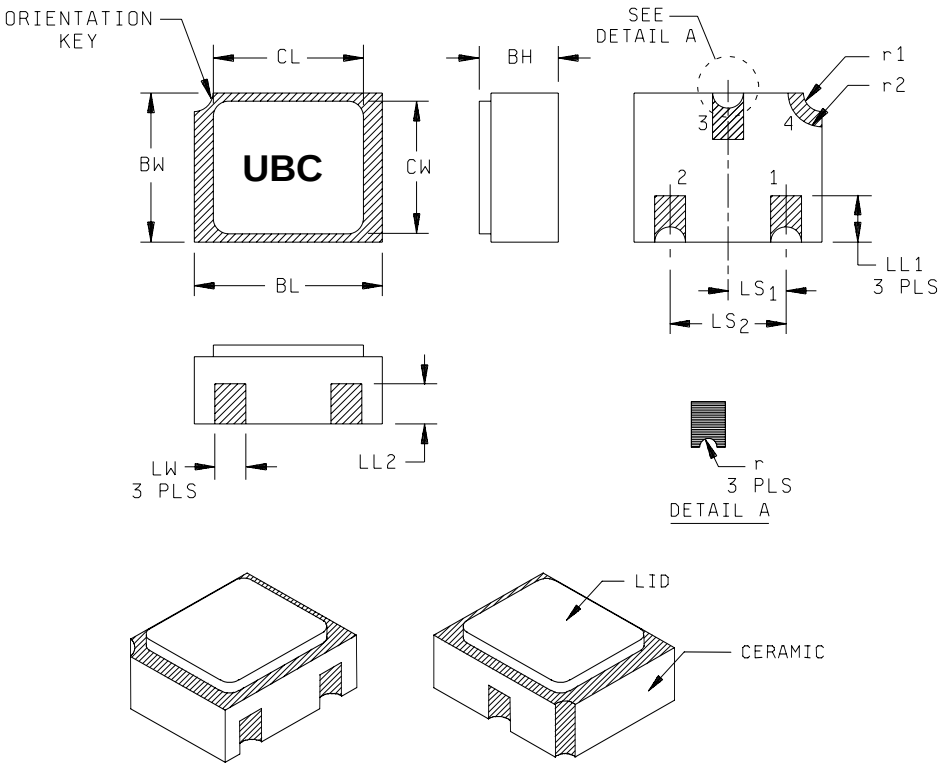


Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BH	.046	.071	1.17	1.80	
BL	.115	.128	2.92	3.25	
BW	.085	.108	2.16	2.74	
CL		.128		3.25	
CW		.108		2.74	
LL_1	.022	.038	0.56	0.96	
LL_2	.017	.035	0.43	0.89	

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
LS_1	.036	.040	0.91	1.02	
LS_2	.071	.079	1.81	2.01	
LW	.016	.024	0.41	0.61	
r		.008		.203	
r1		.012		.305	
r2		.022		.559	

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Hatched areas on package denote metallized areas
4. Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = connected to the lid braze ring.
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 4. Physical dimensions, surface mount (UBC version, ceramic lid).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

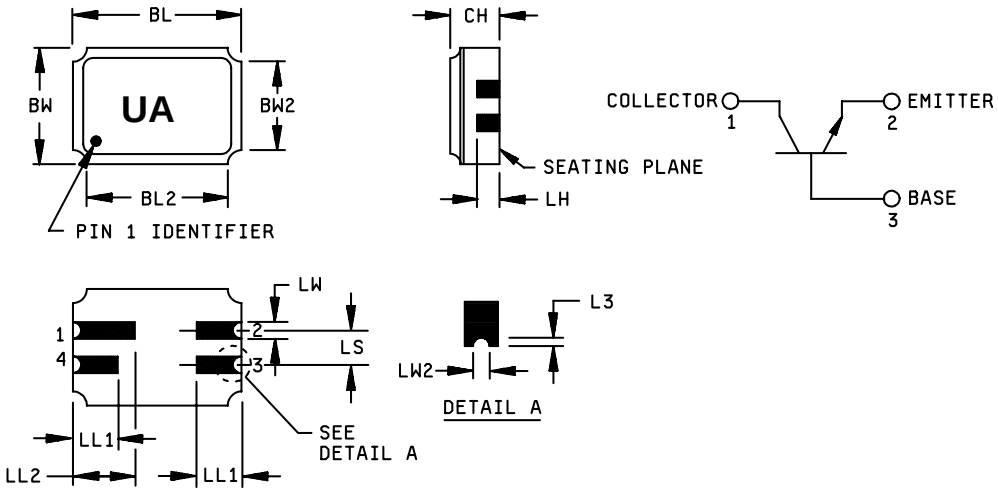


Ltr.	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.215	.225	5.46	5.71
BL_2		.225		5.71
BW	.145	.155	3.68	3.93
BW_2		.155		3.93
CH	.061	.075	1.55	1.90
L_3	.003	.007	0.08	0.18
LH	.029	.042	0.74	1.07
LL_1	.032	.048	0.81	1.22
LL_2	.072	.088	1.83	2.23
LS	.045	.055	1.14	1.39
LW	.022	.028	0.56	0.71
LW_2	.006	.022	0.15	0.56

Pin number.	1	2	3	4
Transistor	Collector	Emitter	Base	N/C

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimension CH controls the overall package thickness. When a window lid is used, dimension CH must increase by a minimum of .010 inch (0.254 mm) and a maximum of .040 inch (1.020 mm).
4. The corner shape (square, notch, radius) may vary at the manufacturer's option, from that shown on the drawing.
5. Dimensions LW2 minimum and L3 minimum and the appropriate castellation length define an unobstructed three-dimensional space traversing all of the ceramic layers in which a castellation was designed. (Castellations are required on the bottom two layers, optional on the top ceramic layer.) Dimension LW2 maximum and L3 maximum define the maximum width and depth of the castellation at any point on its surface. Measurement of these dimensions may be made prior to solder dipping.
6. The co-planarity deviation of all terminal contact points, as defined by the device seating plane, shall not exceed .006 inch (0.15mm) for solder dipped leadless chip carriers.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 5. Physical dimensions - surface mount (UA version, 2N2369AUA, 2N3227UA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

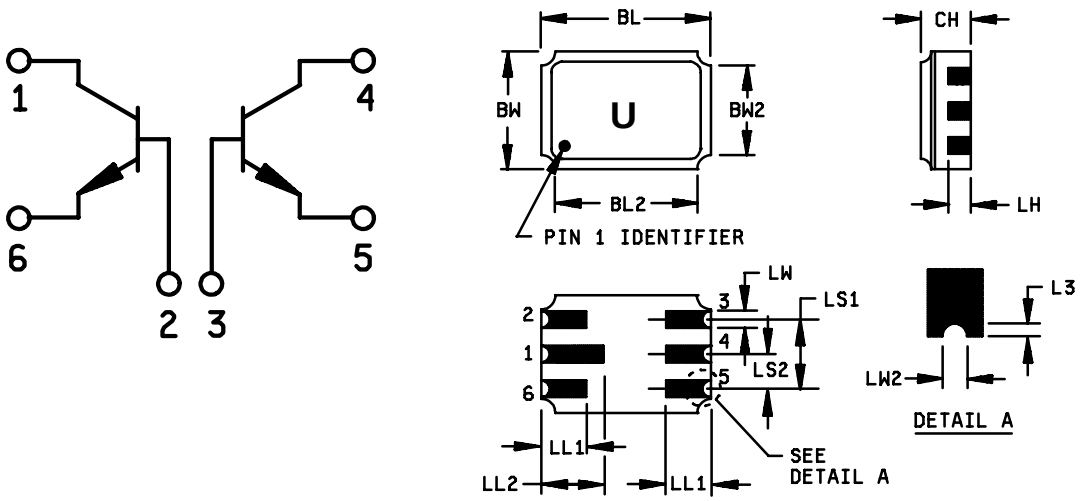

Ltr.	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.240	.250	6.10	6.35
BL_2		.250		6.35
BW	.165	.175	4.19	4.44
BW_2		.175		4.44
CH	.066	.080	1.68	2.03
L_3	.003	.007	0.08	0.18
LH	.026	.034	0.66	0.86
LL_1	.060	.070	1.52	1.78
LL_2	.082	.098	2.08	2.49
LS_1	.095	.105	2.41	2.67
LS_2	.045	.055	1.14	1.39
LW	.022	.028	0.56	0.71
LW_2	.006	.022	0.15	0.56


Pin Number	1	2	3	4	5	6
Transistor	Collector no. 1	Base no. 1	Base no. 2	Collector no. 2	Emitter no. 2	Emitter no. 1

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimension CH controls the overall package thickness. When a window lid is used, dimension CH must increase by a minimum of .010 inch (0.254 mm) and a maximum of .040 inch (1.020 mm).
4. The corner shape (square, notch, radius) may vary at the manufacturer's option, from that shown on the drawing.
5. Dimensions LW2 minimum and L3 minimum and the appropriate castellation length define an unobstructed three-dimensional space traversing all of the ceramic layers in which a castellation was designed. (Castellations are required on the bottom two layers, optional on the top ceramic layer.) Dimension LW2 maximum and L3 maximum define the maximum width and depth of the castellation at any point on its surface. Measurement of these dimensions may be made prior to solder dipping.
6. The co-planarity deviation of all terminal contact points, as defined by the device seating plane, shall not exceed .006 inch (0.15mm) for solder dipped leadless chip carriers.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 6. Physical dimensions - surface mount (dual transistors, U version only, 2N2369AU, 2N3227U).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

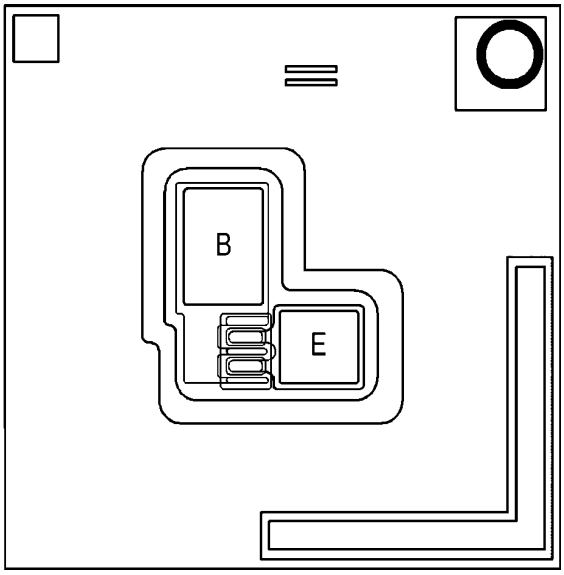

Die size:	.020 x .020 inch ±.002 inch.
Die thickness:	.010 ± .0015 inch nominal.
Top metal:	Aluminum 10,000Å minimum, 12,000Å nominal.
Back metal:	Gold 3,500Å minimum, 5,000Å nominal.
Backside:	Collector.
Bonding pad:	B = .004 x .0045 inch, E = .0045 x .005 inch.

* FIGURE 7. JANHC and JANKC A-version die dimensions - 2N2369A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

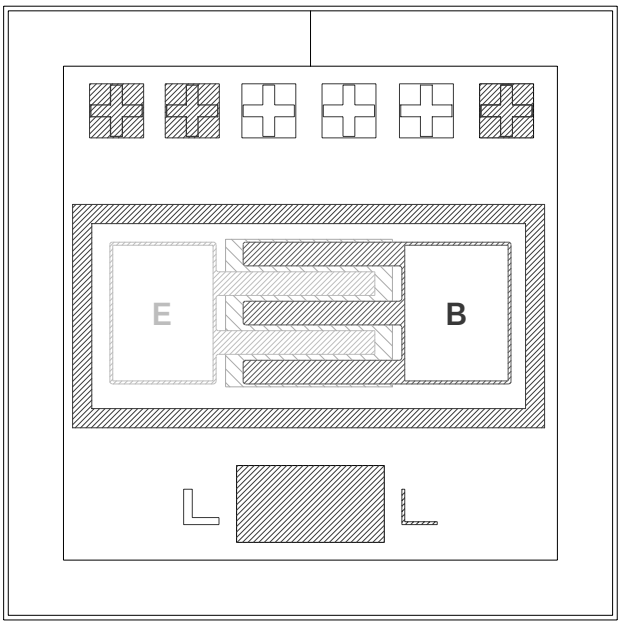

Die size:	.016 inch x .016 inch.
Die thickness:	.008 inch ±.0016 inch.
Base pad:	.0036 inch x .0028 inch.
Emitter pad:	.0036 inch x .0028 inch.
Back metal:	Gold, 6,500 ±1,950 Å.
Top metal:	Aluminum, 17,500 ±2,500 Å.
Back side:	Collector.
Glassivation:	SiO_2, 7,500 ±1,500 Å.

FIGURE 8. JANHC and JANKC B-version die dimensions - 2N2369A, 2N3227.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, and herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

* 3.5 Radiation hardness assurance (RHA). Radiation hardness assurance requirements, PIN designators, and test levels shall be as defined in MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4 and table I herein. When a particular device is specified, the limit applies to all package types (e.g., 2N2369A, 2N2369AU, 2N2369AUA, 2N2369AUB, and 2N2369AUBC).

3.7 Electrical test requirements. The electrical test requirements shall be specified in table I. When a particular device is specified, the limit applies to all package types (e.g., 2N2369A, 2N2369AU, 2N2369AUA, 2N2369AUB and 2N2369AUBC).

* 3.8 Marking. Marking shall be in accordance with MIL-PRF-19500, except for the UB and UBC suffix package. Marking on the UB package shall consist of an abbreviated part number, the date code, and the manufacturers symbol or logo. The prefixes JAN, JANTX, JANTXV, and JANS can be abbreviated as J, JX, JV, and JS respectively. The "2N" prefix and the "AUB" suffix may also be omitted. The radiation hardened designator M, D, P, L, R, F, G, or H shall immediately precede (or replace) the device “2N” identifier (depending upon degree of abbreviation required).

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

* c. Conformance inspection (see 4.4 and tables I. II, III and IV).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

* 4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table IV tests, the tests specified in table IV herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with table VI of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
(1) 3c	Thermal impedance (see 4.3.3)	Thermal impedance (see 4.3.3)
9	I_{CES} and h_{FE3}	Not applicable
11	I_{CES}; h_{FE3}; ΔI_{CES} = 100 percent of initial value or 25 nA dc, whichever is greater. Δh_{FE3} = ±15 percent of initial value.	I_{CES}, h_{FE3}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; ΔI_{CES} = 100 percent of initial value or 25 nA dc, whichever is greater; Δh_{FE3} = ±15 percent of initial value.	Subgroup 2 of table I herein; ΔI_{CES} = 100 percent of initial value or 25 nA dc, whichever is greater; Δh_{FE3} = ±15 percent of initial value.

(1) Shall be performed anytime after temperature cycling, screen 3a; and does not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: V_{CE} = 5 - 15 V dc, P_D = 360 mW, T_A = room ambient as defined in 4.5 of MIL-STD-750. $T_J \geq +135°C$ for U, UA, UB, and UBC. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, T_J, mounting conditions, etc.) may be used for JANTX and JANTXV quality levels. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.2. Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with appendix G of MIL-PRF-19500. Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

4.3.3 Thermal impedance (ΔV_{BE} measurements). The ΔV_{BE} measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining V_H, V_{CE}, I_M, I_H, t_H, t_{SW}, and t_{MD}. The ΔV_{BE} limit used in screen 3c of 4.3 herein and table I, subgroup 2 shall be set statistically by the supplier over several die lots and submitted to the qualifying activity for approval. See group E, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein. If alternate screening is being performed in accordance with MIL-PRF-19500, a sample of screened devices shall be submitted to and pass the requirements of group A1 and A2 inspection only (table E-VIb, group B, subgroup 1 is not required to be performed again if group B has already been satisfied in accordance with 4.4.2).

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VIa (JANS) of MIL-PRF-19500 and 4.4.2.1. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2. Delta requirements shall be in accordance with table II herein. See 4.4.2.2 for JAN, JANTX, and JANTXV group B testing. Electrical measurements (end-points) for JAN, JANTX, and JANTXV shall be after each step in 4.4.2.2 and shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.2.1 Group B inspection, table E-VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B4	1037	V_{CB} = 12 V dc, $t_{ON} = t_{OFF}$ = 3 minutes, $P_{D(ON)} = P_D$ max rated, see 1.3; $P_{D(OFF)} = 0$.
B5	1027	V_{CB} = 12 V dc. $P_D \geq$ 100 percent of maximum rated P_T (see 1.3). Option 1: 96 hrs min, Sample size in accordance with table E-VIa of MIL-PRF-19500, adjust T_A to achieve T_J = +275°C minimum. Option 2: 216 hrs min., sample size = 45, c = 0; adjust T_A to achieve T_J = +225°C minimum. (NOTE: If a failure occurs, resubmission shall be at the test conditions of the original sample.)

4.4.2.2 Group B inspection, (JAN, JANTX, and JANTXV) Separate samples may be used for each step. In the event of a group B failure, the manufacturer may pull a new sample at double the sample size from either the failed assembly lot or from another assembly lot from the same wafer lot. If the new assembly lot option is exercised, the failed assembly lot shall be scrapped.

Step	Method	Condition
1	1026	Steady-state life: 1,000 hours, V_{CB} = 5 - 15 V dc, power shall be applied to achieve T_J = +150°C minimum using a minimum of P_D = 100 percent of maximum rated P_T as defined in 1.3, in addition, adjust T_A to achieve T_J. n = 45 devices, c = 0. The sample size may be increased and the test time decreased so long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours.
2	1048	Blocking life: T_A = +150°, V_{CB} = 80 percent of rated voltage, 48 hours minimum. n = 45 devices, c = 0.
3	1032	High-temperature life (non-operating), t = 340 hours, T_A = +200°C. n = 22, c = 0.

4.4.2.3 Group B sample selection. Samples selected from group B inspection shall meet all of the following requirements:

a. For JAN, JANTX, and JANTXV samples shall be selected randomly from a minimum of three wafers (or from each wafer in the lot) from each wafer lot. For JANS, samples shall be selected from each inspection lot. See MIL-PRF-19500.

b. Must be chosen from an inspection lot that has been submitted to and passed group A, subgroup 2, conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for life test (subgroups B4 and B5 for JANS, and group B for JAN, JANTX, and JANTXV) may be pulled prior to the application of final lead finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and in 4.4.3.1 (JANS) and 4.4.3.2 (JAN, JANTX, and JANTXV) herein for group C testing. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2. Delta requirements shall be in accordance with table II herein.

4.4.3.1 Group C inspection, table E-VII (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition E; not applicable for U, UA, and UB devices.
C6	1026	1,000 hours at V_{CB} = 5 - 15 V dc. Maximum rated power (see 1.3) shall be applied to the device and ambient temperature shall be adjusted to achieve $T_J \geq +150°C$. The sample size may be increased and the test time decreased so long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours. n = 45, c = 0.

4.4.3.2 Group C inspection, table E-VII (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition E; not applicable for U, UA, and UB devices.
C6		Not applicable.

4.4.3.3 Group C sample selection. Samples for subgroups in group C shall be chosen at random from any inspection lot containing the intended package type and lead finish procured to the same specification which is submitted to and passes group A tests for conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for C6 life test may be pulled prior to the application of final lead finish. Testing of a subgroup using a single device type enclosed in the intended package type shall be considered as complying with the requirements for that subgroup.

* 4.4.4 Group D inspection. Conformance inspection for hardness assured JANS, JANJ, and JANTXV types shall include the group D tests specified in table II herein. These tests shall be performed as required in accordance with MIL-PRF-19500 and method 1019 of MIL-STD-750, for total ionizing dose or method 1017 of MIL-STD-750 for neutron fluence as applicable (see 6.2 herein), except group D, subgroup 2 may be performed separate from other subgroups. Group D inspection may also be performed ahead of the screening lot using die selected in accordance with MIL-PRF-19500 and related documents. Alternate package options may also be substituted for the testing provided there is no adverse effect to the fluence profile.

* 4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table E-IX of MIL-PRF-19500 and as specified in table IV herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2. Delta requirements shall be in accordance with table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Input capacitance. This test shall be conducted in accordance with method 3240 of MIL-STD-750, except the output capacitor shall be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 3/						
Visual and mechanical 4/ examination	2071	n = 45 devices, c = 0				
Solderability 4/ 5/	2026	n = 15 leads, c = 0				
Resistance to solvents 4/ 5/ 6/	1022	n = 15 devices, c = 0				
Temp cycling 4/ 5/	1051	Test condition C, 25 cycles. n = 22 devices, c = 0				
Hermetic seal 5/	1071	n = 22 devices, c = 0				
Fine leak		Test conditions G or H				
Gross leak		Test conditions C or D				
Electrical measurements 5/		Table I, subgroup 2				
Bond strength 4/ 5/	2037	Precondition T_A = +250°C at t = 24 hrs or T_A = 300°C at t = 2 hrs; n = 11 wires, c = 0				
Decap internal visual 5/	2075	n = 4 devices, c = 0				
Subgroup 2						
Thermal impedance 7/	3131	See 4.3.3	ΔV_{BE}			mV
Collector to base cutoff current	3036	V_{CB} = 40 V dc	I_{CBO1}		10	µA dc
Emitter to base cutoff current	3061		I_{EBO1}		10	µA dc
2N2369A, 2N4449		V_{EB} = 4.5 V dc				
2N3227		V_{EB} = 6.0 V dc				
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = 10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$			
2N2369A, 2N4449				15		V dc
2N3227				20		V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = 20 V dc	I_{CES}		0.4	µA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 32 V dc	I_{CBO2}		0.2	µA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 4 V dc	I_{EBO2}		0.25	µA dc
Forward-current transfer ratio	3076	V_{CE} = 0.35 V dc; I_C = 10 mA dc pulsed (see 4.5.1).	h_{FE1}			
2N2369A, 2N4449,				40	120	
2N3227				70	250	
Forward-current transfer ratio	3076	V_{CE} = 0.4 V dc; I_C = 30 mA dc pulsed (see 4.5.1).	h_{FE2}			
2N2369A, 2N4449				30	120	
2N3227				40	250	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Forward-current transfer ratio 2N2369A, 2N4449 2N3227	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc pulsed (see 4.5.1).	h_{FE3}	 40 75	 120 300	
Forward-current transfer ratio 2N2369A, 2N4449 2N3227	3076	V_{CE} = 1.0 V dc; I_C = 100 mA dc; pulsed (see 4.5.1).	h_{FE4}	 20 30	 120 150	
Collector-emitter saturation voltage	3071	I_C = 10 mA dc; I_B = 1.0 mA dc pulsed (see 4.5.1).	$V_{CE(sat)1}$		0.20	V dc
Collector-emitter saturation voltage	3071	I_C = 30 mA dc; I_B = 3.0 mA dc; pulsed (see 4.5.1).	$V_{CE(sat)2}$		0.25	V dc
Collector-emitter saturation voltage	3071	I_C = 100 mA dc; I_B = 10 mA dc; pulsed (see 4.5.1).	$V_{CE(sat)3}$		0.45	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 10 mA dc; I_B = 1.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)1}$	0.70	0.85	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 30 mA dc; I_B = 3.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)2}$		0.90	
Base-emitter saturation voltage	3066	Test condition A; I_C = 100 mA dc; I_B = 10 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)3}$	0.80	1.20	V dc
Subgroup 3						
High temperature operation		T_A = +150°C				
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 20 V dc	I_{CBO2}		30	µA dc
High temperature operation		T_A = +125°C				
Collector to base cutoff current	3041	Bias condition A; V_{CE} = 10 V dc; V_{BE} = 0.25 V dc	I_{CEX2}		30	µA dc
Collector - emitter voltage saturated	3071	I_C = 10 mA dc I_B = 1.0 mA dc	$V_{CE(sat)4}$		0.3	V dc
Base - emitter saturated voltage 2N2369A, 2N4449 2N3227	3066	Test condition A; I_C = 10 mA dc; I_B = 1.0 mA dc	$V_{BE(sat)4}$	 0.59 0.50		 V dc V dc
Low temperature operation		T_A = -55°C				
Forward-current transfer ratio 2N2369A, 2N4449 2N3227	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc pulsed (see 4.5.1)	h_{FE5}	 20 40		
Base - emitter saturated voltage	3066	Test condition A; I_C = 10 mA dc; I_B = 1.0 mA dc	$V_{BE(sat)5}$		1.02	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Magnitude of small-signal short-circuit forward current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 10 mA dc; f = 100 MHz	$\lvert h_{fe} \rvert$	5.0	10	
Open circuit output capacitance	3236	V_{CB} = 5 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		4.0	pF
Input capacitance (output open-circuited)	3240	V_{EB} = 0.5 V dc; I_C = 0; 100 kHz ≤ f ≤ 1 MHz	C_{ibo}			
2N2369A, 2N4449					5.0	pF
2N3227					4.0	pF
Charge storage time		I_C = 10 mA dc; I_{B1} = 10 mA dc; I_{B2} = 10 mA dc; (see figure 14)	t_S			
2N2369A, 2N4449					13	ns
2N3227					18	ns
Turn-on time		I_C = 10 mA dc; I_{B1} = 3.0 mA dc; I_{B2} = -1.5 mA dc; (see figure 15)	t_{on}		12	ns
Turn-off time		I_C = 10 mA dc; I_{B1} = 3.0 mA dc; I_{B2} = -1.5 mA dc; (see figure 15)	t_{off}			
2N2369A, 2N4449					18	ns
2N3227					25	ns

1/ For sampling (unless otherwise specified) plan see MIL-PRF-19500.
2/ Electrical characteristics for the U, UA, and UB suffix devices are identical to the corresponding non-suffix device.
3/ For resubmission of failed subgroup 1, double the sample size of the failed test or sequence of tests. A failure in table I, subgroup 1 shall not require retest of the entire subgroup. Only the failed test shall be rerun upon submission.
4/ Separate samples may be used.
5/ Not required for JANS devices.
6/ Not required for laser marked devices.
7/ This test required for the following end-point measurements only:
Group B, subgroups 3, 4, and 5 (JANS).
Group B, steps 2 and 3 (JAN, JANTX, and JANTXV).
Group C, subgroup 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE II. Group D inspection.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 4/						
Neutron irradiation	1017	Neutron exposure V_{CES} = 0V				
Collector to base cutoff current	3036	V_{CB} = 40 V dc	I_{CBO1}		20	µA dc
Emitter to base cutoff current 2N2369A, 2N4449 2N3227	3061	 V_{EB} = 4.5 V dc V_{EB} = 6.0 V dc	I_{EBO1}		20	µA dc
Breakdown voltage, collector to emitter 2N2369A, 2N4449 2N3227	3011	Bias condition D; I_C = 10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	 15 20		 V dc V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = 20 V dc	I_{CES}		0.8	µA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 32 V dc	I_{CBO2}		0.4	µA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 4 V dc	I_{EBO2}		0.50	µA dc
Forward-current transfer ratio M through H2N2369A, 2N4449 M through H2N3277	3076	V_{CE} = 0.35 V dc; I_C = 10 mA dc pulsed (see 4.5.1).	[h_{FE1}] 5/	 [20] [35]	 120 250	
Forward-current transfer ratio M through H2N2369A, 2N4449 M through H2N3277	3076	V_{CE} = 0.4 V dc; I_C = 30 mA dc, pulsed (see 4.5.1).	[h_{FE2}] 5/	 [15] [20]	 120 250	
Forward-current transfer ratio M through H2N2369A, 2N4449 M through H2N3277	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc, pulsed (see 4.5.1).	[h_{FE3}] 5/	 [20] [37.5]	 120 300	
Forward-current transfer ratio M through H2N2369A, 2N4449 M through H2N3277	3076	V_{CE} = 1.0 V dc; I_C = 100 mA dc pulsed (see 4.5.1).	[h_{FE4}] 5/	 [10] [15]	 120 150	
Collector-emitter saturation voltage	3071	I_C = 10 mA dc; I_B = 1 mA dc pulsed (see 4.5.1).	$V_{CE(sat)1}$		0.23	V dc
Collector-emitter saturation voltage	3071	I_C = 30 mA dc; I_B = 3.0 mA dc pulsed (see 4.5.1).	$V_{CE(sat)2}$		0.29	V dc
Collector-emitter saturation voltage	3071	I_C = 100 mA dc; I_B = 10 mA dc pulsed (see 4.5.1).	$V_{CE(sat)3}$		0.52	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE II. Group D inspection - Continued.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 4/ - Continued.						
Base-emitter saturation voltage	3066	Test condition A; I_C = 10 mA dc; I_B = 1.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)1}$	0.70	0.98	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 30 mA dc; I_B = 3.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)2}$		1.04	
Base-emitter saturation voltage	3066	Test condition A; I_C = 100 mA dc; I_B = 10 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)3}$	0.80	1.38	V dc
Subgroup 2						
Total dose irradiation	1019	Gamma exposure Condition A.				
M through H2N2369A, 2N4449		V_{CES} = 12 V				
M through H2N3277		V_{CES} = 16 V				
Collector to base cutoff current	3036	V_{CB} = 40 V dc	I_{CBO1}		20	µA dc
Emitter to base cutoff current	3061		I_{EBO1}		20	µA dc
2N2369A, 2N4449		V_{EB} = 4.5 V dc				
2N3227		V_{EB} = 6.0 V dc				
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = 10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$			
2N2369A, 2N4449				15		V dc
2N3227				20		V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = 20 V dc	I_{CES}		0.8	µA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 32 V dc	I_{CBO2}		0.4	µA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 4 V dc	I_{EBO2}		0.50	µA dc
Forward-current transfer ratio	3076	V_{CE} = 0.35 V dc; I_C = 10 mA dc. pulsed(see 4.5.1).	[h_{FE1}] 5/			
M through H2N2369A, 2N4449				[20]	120	
M through H2N3277				[35]	250	
Forward-current transfer ratio	3076	V_{CE} = 0.4 V dc; I_C = 30 mA dc. pulsed(see 4.5.1).	[h_{FE2}] 5/			
M through H2N2369A, 2N4449				[15]	120	
M through H2N3277				[20]	250	
Forward-current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc. pulsed(see 4.5.1).	[h_{FE3}] 5/			
M through H2N2369A, 2N4449				[20]	120	
M through H2N3277				[37.5]	300	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE II. Group D inspection - Continued.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued.						
Forward-current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 100 mA dc. pulsed(see 4.5.1).	[h_{FE4}] 5/			
M through H2N2369A, 2N4449				[10]	120	
M through H2N3277				[15]	150	
Collector-emitter saturation voltage	3071	I_C = 10 mA dc; I_B = 1.0 mA dc. pulsed (see 4.5.1).	$V_{CE(sat)1}$		0.23	V dc
Collector-emitter saturation voltage	3071	I_C = 30 mA dc; I_B = 3.0 mA dc. pulsed (see 4.5.1).	$V_{CE(sat)2}$		0.29	V dc
Collector-emitter saturation voltage	3071	I_C = 100 mA dc; I_B = 10 mA dc. pulsed (see 4.5.1).	$V_{CE(sat)3}$		0.52	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 10 mA dc; I_B = 1.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)1}$	0.70	0.98	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 30 mA dc; I_B = 3.0 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)2}$		1.04	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = 100 mA dc; I_B = 10 mA dc; pulsed (see 4.5.1).	$V_{BE(sat)3}$	0.80	1.38	V dc

1/ Tests to be performed on all devices receiving radiation exposure.
2/ For sampling plan, see MIL-PRF-19500.
3/ Electrical characteristics apply to the corresponding AL, UA, UB, and UBC suffix versions unless otherwise noted.
4/ See 6.2.g herein.
5/ See method 1019 of MIL-STD-750 for how to determine [h_{FE}] by first calculating the delta ($1/h_{FE}$) from the pre- and Post-radiation h_{FE}. Notice the [h_{FE}] is not the same as h_{FE} and cannot be measured directly. The [h_{FE}] value can never exceed the pre-radiation minimum h_{FE} that it is based upon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE III. Groups B, C, and E delta measurements.

Step	Inspection 1/ 2/ 3/ 4/	MIL-STD-750		Symbol	Limit
		Method	Conditions		
1.	Forward-current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc; pulsed (see 4.5.1)	Δh_{FE3}	±25 percent change from initial value.
2.	Collector - emitter and resistance	3071	I_C = 10 mA dc I_B = 1.0 mA dc	$\Delta V_{CE(sat)1}$	±50 mV change from previous measured value.
3.	Collector - emitter cutoff current	3041	Bias condition C; V_{CE} = 20 V dc	ΔI_{CES}	100 percent of initial value or 25 nA dc, whichever is greater.


1/ The delta measurements for table VIa (JANS) of MIL-PRF-19500 are as follows: Subgroups B4 and B5, see table III herein, steps 1, 2, and 3.
2/ The delta measurements (JAN, JANTX and JANTXV) of 4.4.2.2 herein are as follows: Steps 1, 2, and 3, see table III herein, steps 1 and 3.
3/ The delta measurements for table VII of MIL-PRF-19500 and 4.4.3.1 are as follows: Subgroup 6, see table III herein, steps 2 and 3 (for JANS).
4/ The delta measurements for table IX of MIL-PRF-19500 and table III herein are as follows: Subgroups 1 and 2, see table III herein, all steps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* TABLE IV. Group E inspection (all quality levels) – for qualification or re-qualification only.

Inspection	MIL-STD-750		Qualification
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling (air to air)	1051	Test condition C, 500 cycles.	
Hermetic seal Fine leak Gross leak	1071	 Test conditions G or H Test conditions C or D	
Electrical measurements		See table I, subgroup 2 and table III herein.	
Subgroup 2			45 devices c = 0
Intermittent life	1037	Intermittent operation life: V_{CB} = 10 V dc; 6,000 cycles, $t_{ON} = t_{OFF}$ = 3 minutes, $P_{DON} = P_D$ max rated in accordance with 1.3; P_{DOFF} = 0.	
Electrical measurements		See table I, subgroup 2 and table III herein.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See table E-IX, subgroup 4 of MIL PRF-19500.	
Subgroup 5			
Not applicable			
Subgroup 6			3 devices
ESD	1020		
Subgroup 8			45 devices c = 0
Reverse stability	1033	Condition B.	


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

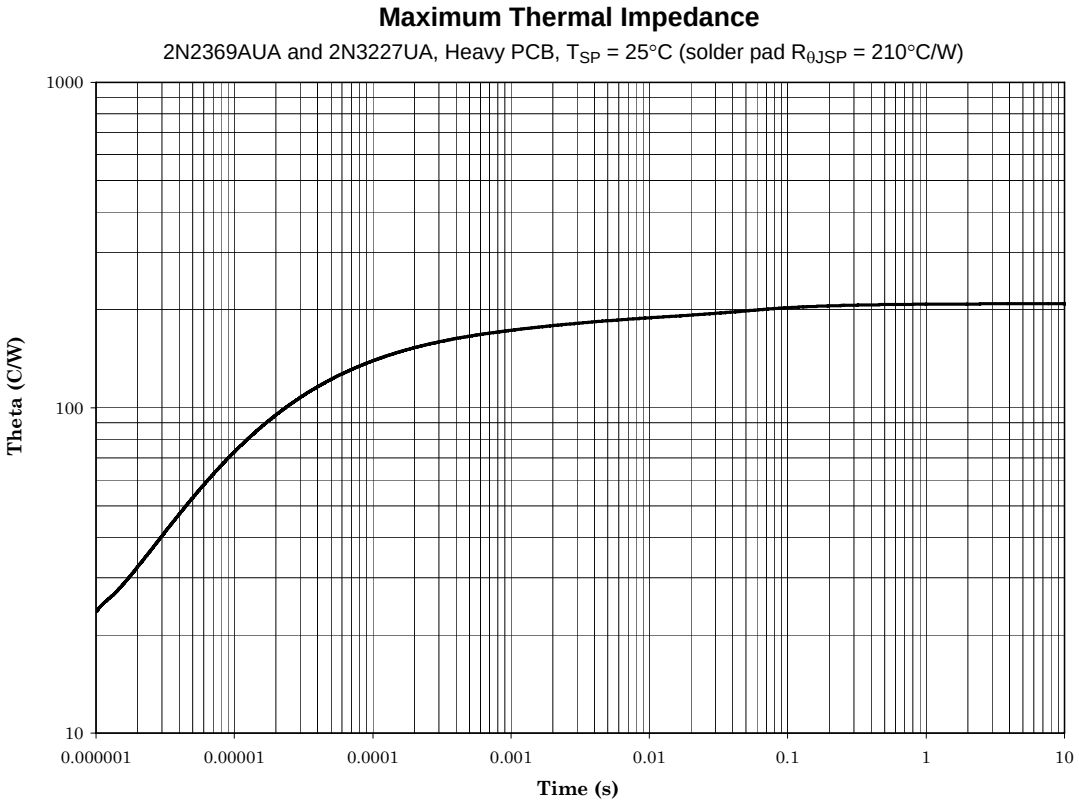

* FIGURE 9. Thermal impedance graph ($R_{\theta JSP}$) for 2N2369AUA and 2N3227UA.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

Maximum Thermal Impedance
2N2369AUB, 2N2369AUBC, 2N3227UB, and 2N3227UBC
Heavy PCB, T_{SP} = 25°C (solder pad $R_{\theta JSP}$ = 210°C/W)

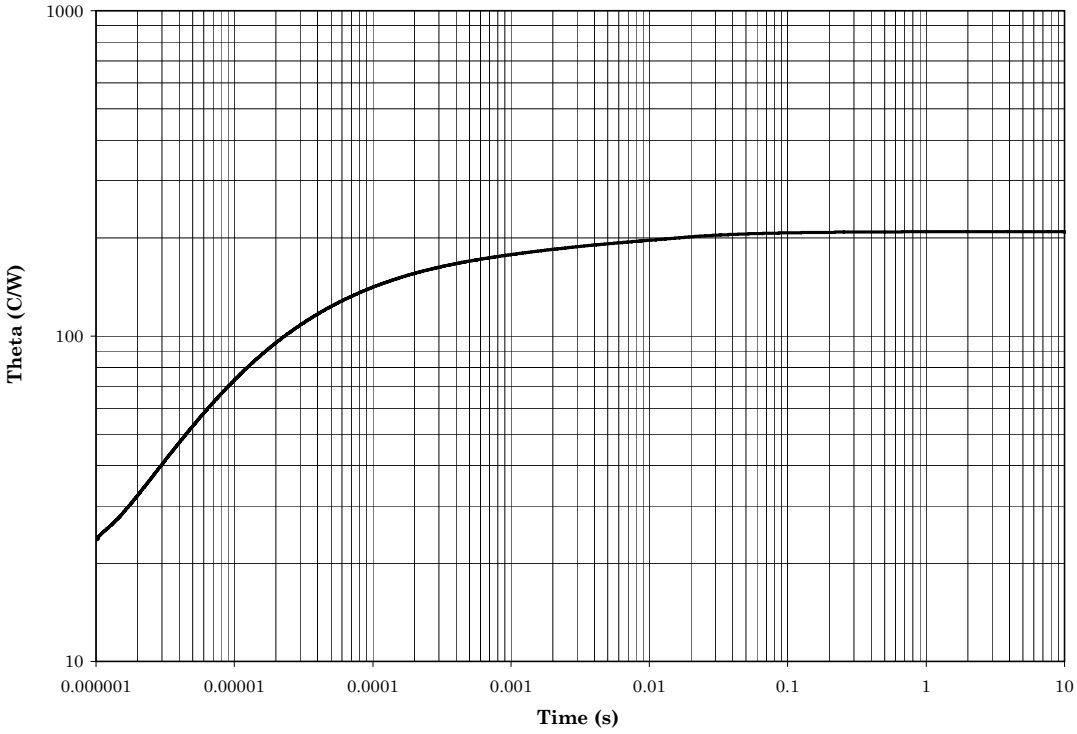


* FIGURE 10. Thermal impedance graph ($R_{\theta JSP}$) for 2N2369AUB, 2N2369AUBC, 2N3227UB, and 2N3227UBC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

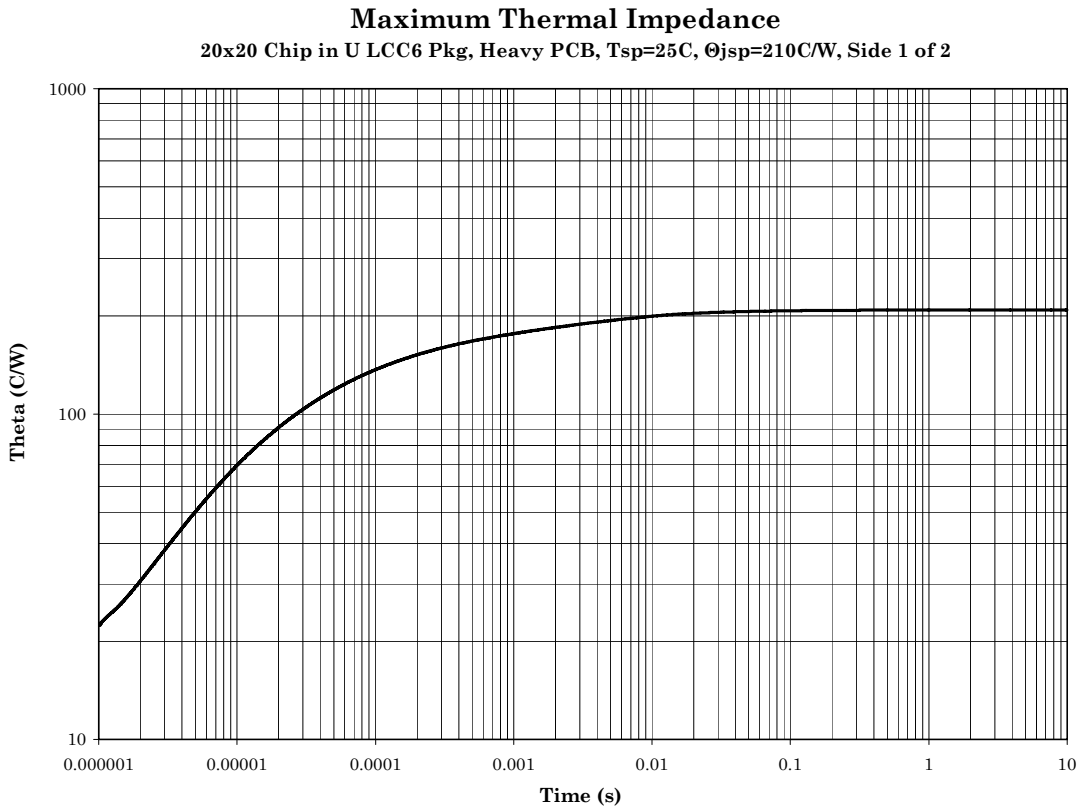


* FIGURE 11. Thermal impedance graph ($R_{\theta JSP}$) for 2N2369AU and 2N3227U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

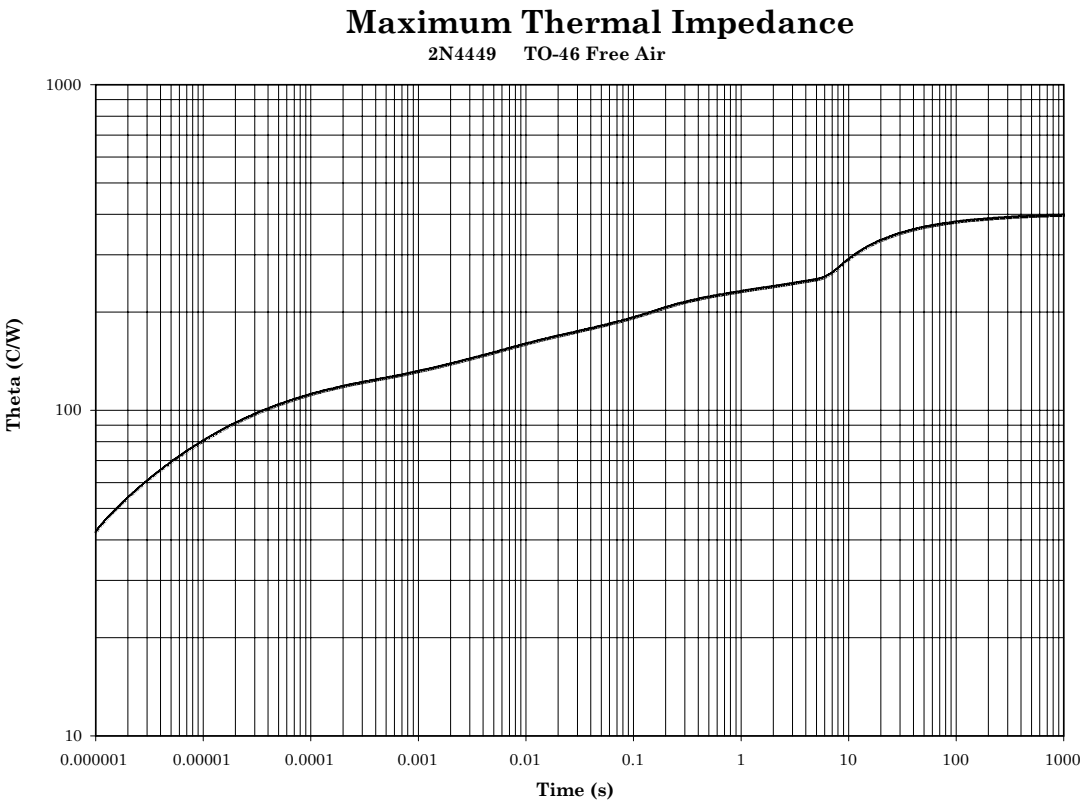


* FIGURE 12. Thermal impedance graph TO-46 ($R_{\theta JA}$) for 2N4449.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

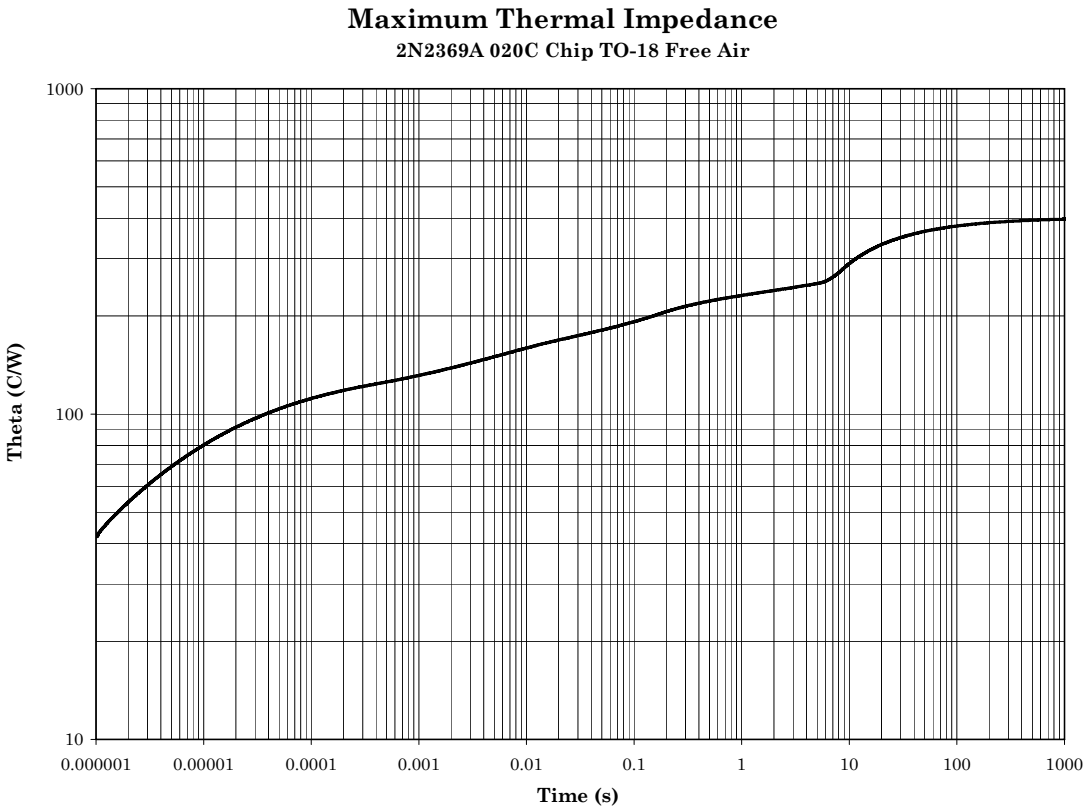

* FIGURE 13. Thermal impedance graph (TO-18) ($R_{\theta JA}$) for 2N2369A and 2N3227.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

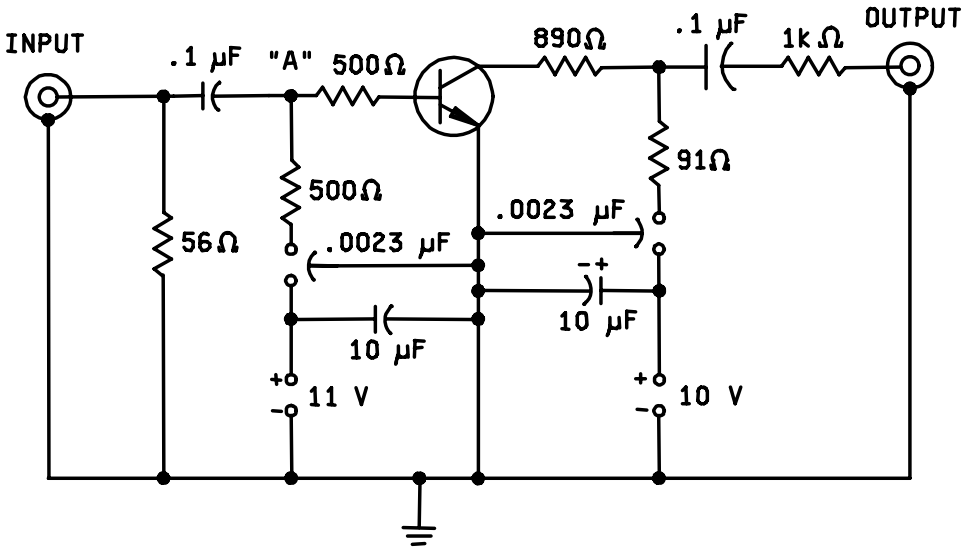

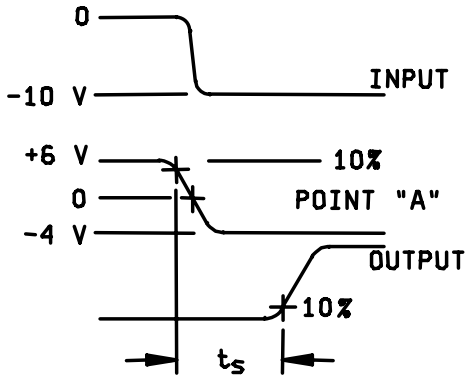



VOLTAGE WAVEFORMS

NOTES:
1. All capacitance in µF.
2. The input waveforms for each circuit are supplied by a pulse generator with the following characteristics: Z_{OUT} = 50Ω, $t_r \leq 1$ ns, PW ≥ 300 ns, duty cycle ≤ 2 percent.
3. Output waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq .1$ ns, Z_{IN} = 50Ω.

* FIGURE14. Charge storage time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

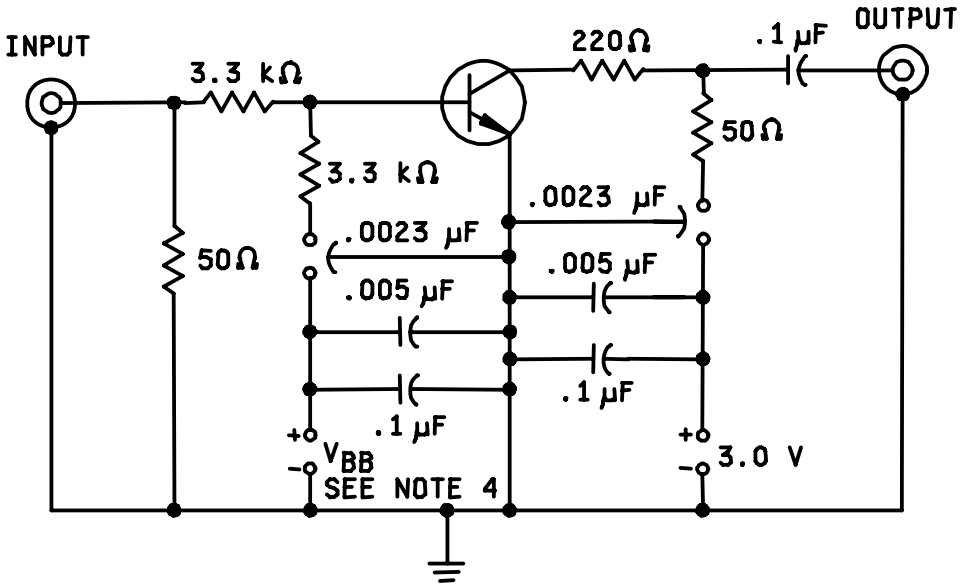

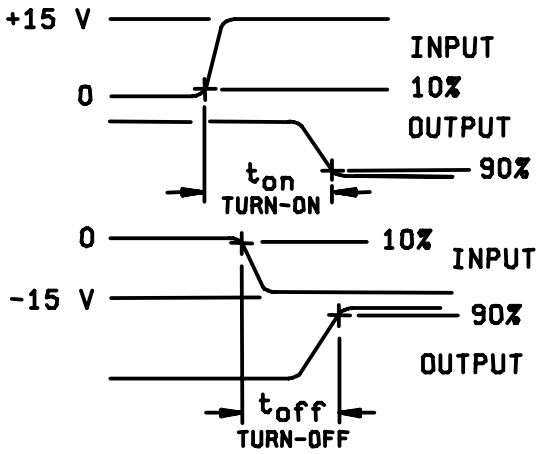

VOLTAGE WAVEFORMS

NOTES:

1. All capacitance in µF.
2. The input waveforms for each circuit are supplied by a pulse generator with the following characteristics: Z_{OUT} = 50Ω, $t_r \leq 1$ ns, PW ≥ 300 ns, duty cycle ≤ 2 percent.
3. Input and output waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq .1$ ns, Z_{IN} = 50Ω.
4. V_{BB} = -3.0 V for t_{on}, +12.0 V for t_{off}.

* FIGURE 15. Turn-on and turn-off time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

* 6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

* e. For acquisition of RHA designed devices, Table II, subgroup 1 testing of Group D is optional. If subgroup 1 testing is desired, it must be specified in the contract.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.

* 6.4 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCA2N2369A) will be identified on the QML.

Die ordering information		
PIN	Manufacturer	
	43611	34156
2N2369A	JANHCA2N2369A, JANKCA2N2369A	JANHCB2N2369A, JANKCB2N2369AM, JANANKCM2N2369A, JANKCD2N2369A, JANCP2N2369A, JANKCL2N2369A, JANKCR2N2369A, JANKCF2N2369A, JANKCG2N2369A, AND JANKCH2N2369A
2N3227		JANHCB2N3227, JANKCB2N3227, JANANKCM2N3227, JANKCD2N3227, JANCP2N3227, JANKCL2N3227, JANKCR2N2N3227, JANKCF2N3227, JANKCG2N3227, AND JANKCH2N3227

6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2007-041)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:18Z
Check the source to verify that this is the current version before use.