The documentation and process conversion measures necessary to comply with this revision shall be completed by 21 August 1997

INCH POUND

MIL-PRF-19500/336D
21 May 1997
SUPERSEDING
MIL-S-19500/336C
31 August 1992

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, UNITIZED, DUAL-TRANSISTOR, PNP,
SILICON TYPES 2N3810, 2N3810L, 2N3811, AND 2N3811L
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for two electrically isolated, matched PNP, silicon transistors as one dual unit. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1. Similar to TO-99.

1.3 Maximum ratings.

P_T T_A = +25°C		V_{CBO}	V_{EBO}	V_{CEO}	I_C	T_{STG} and T_J
One section 1/	Both sections 2/					
W	W	V dc	V dc	V dc	mA dc	°C
0.5	0.6	60	5	60	50	-65 to +200

1/ Derate linearly, 2.86 mW/°C for T_A > +25°C.
2/ Derate linearly, 3.43 mW/°C for T_A > +25°C.

1.4 Primary electrical characteristics at T_A = +25°C.

Limit	h_{FE3} through h_{FE5} V_{CE} = 5 V dc; I_C = 100 µA dc through I_C = 1 mA dc		$\lvert h_{fe} \rvert_2$ V_{CE} = 5 V dc; I_C = 1 mA dc; f = 100 MHz	$V_{BE\ (sat)\ 2}$ I_C = 1 mA dc; I_B = 100 µA dc	$V_{CE\ (sat)\ 2}$ I_C = 1 mA dc; I_B = 100 µA dc
	2N3810 2N3810L	2N3811 2N3811L		V dc	V dc
Minimum	150	300	1		
Maximum	450	900	5	0.8	0.25

Pulsed (see 4.5.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3900 East Broad Street, Columbus, OH 43216, 5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

1.5 Primary electrical matching characteristics of each individual section.

Limit	$\frac{h_{FE3-1}}{h_{FE3-2}}$ V_{CE} = 5 V dc; I_C = 100 µA dc 1/	$\lvert V_{BE1} - V_{BE2} \rvert_2$ V_{CE} = 5 V dc; I_C = 100 µA dc	$\lvert \Delta (V_{BE1} - V_{BE2}) \Delta T_A \rvert 1$ V_{CE} = 5 V dc I_C = 100 µA dc T_A = +25°C and -65°C	$\lvert \Delta (V_{BE1} - V_{BE2}) \Delta T_A \rvert 2$ V_{CE} = 5 V dc; I_C = 100 µA dc T_A = +125°C and +25°C
		mV dc	mV dc	mV dc
Minimum	0.9	3	0.8	1.0
Maximum	1.0			

1/ The larger number will be placed in the denominator.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD


MILITARY


MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

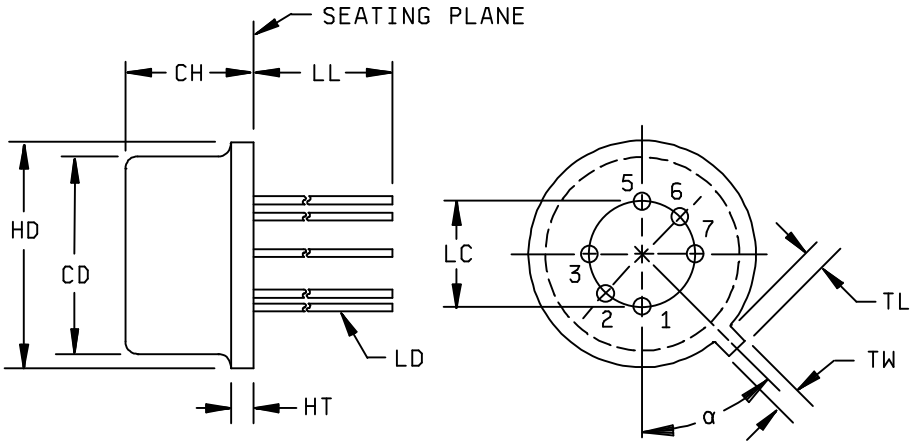

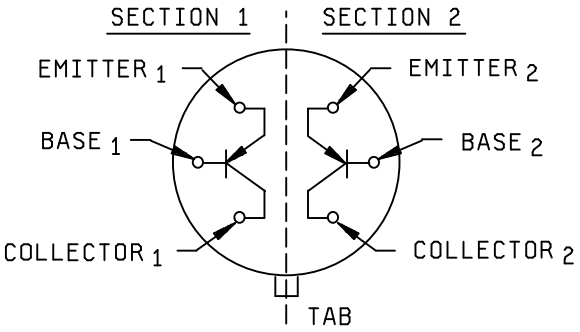

CONNECTION DIAGRAM

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Max	Min	Max	Min	
CD	.305	.335	7.75	8.51	
CH	.150	.260	3.81	7.60	
HD	.335	.370	8.51	9.40	
HT	.009	.041	0.23	1.04	
LC	.140	.160	3.56	4.06	
LD	.016	.021	0.41	0.53	10
LL	See notes 10, 11, and 13				
α	45°TP		45°TP		9
TL	.029	.045	0.74	1.14	5, 6
TW	.028	.034	0.71	0.86	4, 5

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Refer to rules for dimensioning Semiconductor Product Outlines included in Publication No. 95.
4. Lead number 4 and 8 omitted on this variation.
5. TW must be held to a minimum length of .021 inch (0.53 mm).
6. LL measured from maximum HD.
7. Details of outline in this zone optional.
8. CD shall not vary more than .010 inch (.25mm) in zone P. This zone is controlled for automatic handling.
9. Leads at gauge plane .054 - .055 inch (1.37 - 1.40 mm) below seating plane shall be within .007 (.18 mm) radius of true position (TP) at a maximum material condition (MMC) relative to the tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure described on gauge drawing GS-1.
10. LD applies to LL minimum.
11. r (radius) applies to both inside corners of tab.
12. For transistor types 2N3810 and 2N3811, LL is .500 inch (12.70 mm) minimum, and .750 inch (19.50 mm) maximum. (TO-99)
13. For transistor types 2N3810L and 2N3811L, LL is 1.500 inches (38.10 mm) minimum, and 1.750 inches (44.45 mm) maximum.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-19500, and as follows:

$\frac{h_{FE3-1}}{h_{FE3-2}}$	Static forward-current-gain-ratio. The matching ratio of the static forward-current transfer ratios of each section.
$\lvert V_{BE1} - V_{BE2} \rvert$	Absolute value of base-emitter-voltage differential between the individual sections.
$\lvert \Delta(V_{BE1} - V_{BE2})\ \Delta T_A \rvert$	Absolute value of the algebraic difference between the base-emitter-voltage differentials between the individual sections at two different temperatures.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions for the purpose of interchangeability shall be as specified on figure 1 herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-STD-750 and MIL-PRF-19500.

3.4 Marking. Devices shall be marked in accordance with MIL-PRF-19500.

3.5 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and figure 1 (similar to TO-99) herein.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500, appendix E, table VI and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see appendix E, table IV of MIL-PRF-19500)	Measurements	
	JANS level	JANTX and JANTXV levels
9	I_{CBO1}, $\frac{h_{FE3-1}}{h_{FE3-2}}$ and h_{FE5}	Not applicable
11	I_{CBO1} and h_{FE5} ΔI_{CBO1} = 100 percent of initial value or 2 nA dc whichever is greater; Δh_{FE5} = ±15 percent	I_{CBO1} and h_{FE5}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; ΔI_{CBO1} = 100 percent of initial value or 2 nA dc, whichever is greater; Δh_{FE5} = ±15 percent	Subgroup 2 of table herein, ΔI_{CBO1} = 100 percent of initial value or 2 nA dc, whichever is greater; Δh_{FE5} = ±15 percent

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

JANS level (all device types) - - - - - - - - - - - - - - - - V_{CB} = 10 V dc, P_T = 300 mW (each section) at T_A = 25°C ±3°C.
V_{CB} = 10 V dc, P_T = 600 mW (both sections) at T_A = 25°C ±3°C.

JANTX and JANTXV levels
(all device types) - V_{CB} = 45 V dc, P_T = 300 mW (each section) at T_A = 25° ±3°C.
V_{CB} = 45 V dc, P_T = 600 mW (both sections) at T_A = 25° ±3°C.

NOTE: No heat sink or forced air cooling on the devices shall be permitted.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VIa (JANS) and table VIb (JANTX and JANTXV), of MIL-PRF-19500. Electrical measurements (end points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.2.1 Group B inspection, appendix E, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Conditions
B4	1037	V_{CB} = 10 V dc; P_T = 300 mW (each section); P_T = 600 mW (both sections) at T_A = +25°C ±3°C; t_{on} = t_{off} = three minutes minimum for 2,000 cycles. No heat sink or forced-air cooling on devices shall be permitted.
B5	1027	V_{CB} = 10 V dc; P_T = 300 mW (each section); P_T = 600 mW (both sections) at T_A = +100°C for 96 hours, or T_A = +125°C ±25°C for 96 hours with P_T adjusted according to the chosen T_A to give and average T_J = +275°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

4.4.2.2 Group B inspection, appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Conditions
B3	2037	Test condition A.
B3	1027	V_{CB} = 10 V dc; P_T = 300 mW (each section); P_T = 600 mW (both sections) at T_A = +25°C ±3°C. No heat sink or forced-air cooling on the devices shall be permitted.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VII of MIL-PRF-19500. Electrical measurements (end points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.3.1 Group C inspection, appendix E, table VII of MIl-PRF-19500.

Subgroup	Method	Conditions
B2	2036	Test condition E.
6	1026	1,000 hours at V_{CB} = 10 V dc; P_T = 300 mW (each section); P_T = 600 mW (both section) at T_A = +25°C ±3°C. No heat sink or forced-air cooling on device shall be permitted.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Testing of units. All specified electrical tests, including electrical measurements (end points) and delta requirement tests, shall be performed equally on both sections of the transistor types covered herein, except where the electrical characteristic being evaluated applies to the transistor as a device entity.

4.5.2 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.3 Disposition of leads when testing characteristics of each section. During the measurement of the characteristic of each section, the leads of the section not under test shall be open-circuited.

4.5.4 Forward-current-gain ratio. The value for the forward-current-gain ratio for each individual section of a dual unit shall be measured using method 3076 of MIL-STD-750. The forward-current-gain ratio shall be calculated by dividing one of the values by the other. If possible, this ratio shall be measured directly to improve accuracy.

4.5.5 Base-emitter-voltage differential. The base-emitter-voltage differential shall be determined by connecting the emitters of the individual sections together, applying specified electrical test conditions to each individual section in accordance with test condition B, method 3066 of MIL-STD-750, and measuring the absolute value of the voltage between the bases of the individual sections of a dual unit.

4.5.6 Base-emitter-voltage differential change with temperature. The value of the base-emitter-voltage differential shall be measured at the two specified temperatures in accordance with 4.4.5 except that the identities of the individual sections shall be maintained. The absolute value of the algebraic difference between the values at the two temperature extremes shall be calculated. A mathematical formula for this parameter is:

$$\left| (V_{BE1} - V_{BE2})_{T1} - (V_{BE1} - V_{BE2})_{T2} \right|$$

4.5.7 Noise figure test. Noise figure shall be measured using a model No. 2173C/2181 Quan Tech Laboratories test set, or equivalent. Conditions shall be as specified in table I.

4.5.8 Noise figure (wideband) test. Wideband noise figure shall be measured using a model No. 512 Quan Tech Laboratories test set, or equivalent. Conditions shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Breakdown voltage, collector to base	3001	Bias condition D, I_C = 10 µA dc	$V_{(BR)CBO}$	60		V dc
Breakdown voltage, collector to emitter	3011	Bias condition D, I_C = 10 mA dc pulsed (see 4.5.1)	$V_{(BR)CEO}$	60		V dc
Breakdown voltage, emitter to base	3026	Bias condition D, I_E = 10 µA dc	$V_{(BR)EBO}$	5		V dc
Collector to base cutoff current	3036	Bias condition D, V_{CB} = 50 V dc	I_{CBO1}		10	nA dc
Emitter to base cutoff current	3061	Bias condition D, V_{EB} = 4 V dc	I_{EBO}		10	nA dc
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 1 µA dc	h_{FE1}			
2N3811, 2N38llL only				75 75		
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 10 µA dc	h_{FE2}			
2N3810, 2N3810L 2N3811, 2N3811L				100 225		
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 100 µA dc	h_{FE3}			
2N3810, 2N3810L 2N3811, 2N3811L				150 300	450 900	
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 500 µA dc	h_{FE4}			
2N3810, 2N3810L 2N3811, 2N3811L				150 300	450 900	
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 1 mA dc	h_{FE5}			
2N3810, 2N3810L 2N3811, 2N3811L				150 300	450 900	

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 10 mA dc	h_{FE6}			
2N3810, 2N3810L 2N3811, 2N3811L				125 250		
Collector to emitter voltage (saturated)	3071	I_C = 100 µA dc; I_B = 10 µA dc	$V_{CE(sat)1}$		0.2	V dc
Collector to emitter voltage (saturated)	3071	I_C = 1 mA dc; I_B = 100 µA dc	$V_{CE(sat)2}$		0.25	V dc
Base-emitter voltage (saturated)	3066	Test condition A I_C = 100 µA dc; I_B = 10 µA dc	$V_{BE(sat)1}$		0.7	V dc
Base-emitter voltage (saturated)	3066	Test condition A I_C = 1 mA dc; I_B = 100 µA dc	$V_{BE(sat)2}$		0.8	V dc
Base-emitter voltage (nonsaturated)	3066	Test condition A V_{CE} = 5 V dc; I_C = 100 µA dc	$V_{BE(sat)3}$		0.7	V dc
Forward-current transfer ratio (gain ratio)	3076	V_{CE} = 5 V dc; I_C = 100 µA dc (see 4.5.4)	$^{h}FE3-1$ h_{FE3-2}	0.9	1.0	
Base emitter voltage (nonsaturated) (absolute value of differential)	3066	Test condition B V_{CE} = 5 V dc; I_C = 10 µA dc (see 4.5.5)	$\lvert V_{BE1} - V_{BE2} \rvert_1$		5	mV dc
Base emitter voltage (nonsaturated) (absolute value of differential)	3066	Test condition B V_{CE} = 5 V dc; I_C = 100 µA dc (see 4.5.5)	$\lvert V_{BE1} - V_{BE2} \rvert_2$		3	mV dc
Base emitter voltage (nonsaturated) (absolute value of differential)	3066	Test condition B V_{CE} = 5 V dc; I_C = 10 mA dc (see 4.5.5)	$\lvert V_{BE1} - V_{BE2} \rvert_3$		5	mV dc
Base emitter voltage (nonsaturated) (absolute value of differential-change with temperature)	3066	Test condition B V_{CE} = 5 V dc; I_C = 100 µA dc T_A = +25° and -55°C (see 4.5.6)	$\lvert \Delta V_{BE1} - V_{BE2} \rvert / \Delta T_A \rvert_1$		0.8	mV dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method			Min	Max	
Subgroup 2 - Continued						
Base emitter voltage (nonsaturated) (absolute value of differential-change with temperature)	3066	Test condition B V_{CE} = 5 V dc; I_C = 100 µA dc T_A = +125° and +25°C (see 4.5.6)	$\lvert \Delta V_{BE1-V_{BE2}} / \Delta T_A \rvert_2$		1.0	mV dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Collector to base cutoff current	3036	Bias condition D, V_{CB} = 50 V dc	I_{CBO2}		10	µA dc
Low-temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 100 µA dc	h_{FE7}			
2N3810, 2N3810L 2N3811, 2N3811L				60 100		
Subgroup 4						
Open circuit output capacitance	3236	V_{CB} = 5 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		5	pF
Input capacitance (output open-circuited)	3240	V_{EB} = 0.5 V dc; I_C = 0; 100 kHz ≤ f ≤ 1 MHz	C_{ibo}		8	pF
Magnitude of small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 5 V dc; I_C = 500 µA dc; f = 30 MHz	$\lvert h_{FE} \rvert_1$	1.0		
Magnitude of small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 5 V dc; I_C = 1 mA dc; f = 100 MHz	$\lvert h_{FE} \rvert_2$	1.0	5	
Small-signal short-circuit forward current transfer ratio	3206	V_{CE} = 10 V dc; I_C = 1 mA dc; f = 1 kHz	h_{fe}			
2N3810, 2N3810L 2N3811, 2N3811L				150 300	600 900	

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued						
Small-signal short-circuit input impedance	3201	V_{CE} = 10 V dc; I_C = 1 mA dc; f = 1 kHz	h_{ie}			
2N3810, 2N3810L				3	30	kΩ
2N3811, 2N3811L				3	40	kΩ
Small-signal open-circuit output admittance	3216	V_{CE} = 10 V dc; I_C = 1 mA dc; f = 1 kHz	h_{oe}	5	60	µmhos
Small-signal open-circuit reverse-voltage transfer ratio	3211	V_{CE} = 10 V dc; I_C = 1 mA dc; f = 1 kHz	h_{re}		$25x10^{-4}$	
Noise figure	3246	V_{CE} = 10 V dc; I_C = 100 µA dc; Rg = 3 kΩ; f = 100 Hz (see 4.5.7)	F1			
2N3810, 2N3810L					7	dB
2N3811, 2N3811L					4	dB
Noise figure	3246	V_{CE} = 10 V dc; I_C = 100 µA dc; Rg = 3 kΩ; f = 1 kHz (see 4.5.7)	F2			
2N3810, 2N3810L					3	dB
2N3811, 2N3811L					1.5	dB
Noise figure	3246	V_{CE} = 10 V dc; I_C = 100 µA dc; Rg = 3 kΩ; f = 10 kHz (see 4.5.7)	F3			
2N3810, 2N3810L					2.5	dB
2N3811, 2N3811L					2.0	dB
Noise figure (wideband)	3246	V_{CE} = 10 V dc; I_C = 100 µA dc; Rg = 3 kΩ; noise bandwidth 10 Hz to 15.7 kHz (see 4.5.8)	F3			
2N3810, 2N3810L					3.5	dB
2N3811, 2N3811L					2.5	dB
Subgroup 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B and C electrical measurements.

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1	Collector to base cutoff current	3036	Bias condition D; V_{CB} = 50 V dc	I_{CBO1}		10	nA dc
2	Collector to base cutoff current	3036	Bias condition D; V_{CB} = 50 V dc	I_{CBO1}		20	nA dc
3	Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 4 V dc	I_{EBO}		10	nA dc
4	Base emitter voltage (nonsaturated) (absolute value of differential)	3066	Test condition B; V_{CE} = 5 V dc; I_C = 100 µA dc; (see 4.5.5)	$\lvert V_{BE1} - V_{BE2} \rvert_2$		3	mV dc
5	Base emitter voltage (nonsaturated) (absolute value of differential)	3066	Test condition B; V_{CE} = 5 V dc; I_C = 100 µA dc; (see 4.5.5)	$\lvert V_{BE1} - V_{BE2} \rvert_2$		6	mV dc
6	Collector to emitter voltage (saturated)	3071	I_C = 100 µA dc; I_B = 10 µA dc	$V_{CE(sat)1}$		0.2	V dc
7	Base emitter voltage (saturated)	3066	Test condition A; I_C = 100 µA dc; I_B = 10 µA dc	$V_{BE(sat)1}$		0.7	V dc
8	Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 10 µA dc	h_{FE2}			
	2N3810, 2N3810L 2N3811, 2N3811L				100 225		
9	Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 1 mA dc	h_{FE5}			
	2N3810, 2N3810L 2N3811, 2N3811L				150 300	450 900	
10	Forward-current transfer ratio (gain ratio)	3076	V_{CE} = 5 V dc; I_C = 100 µA dc; (see 4.5.4)	$\frac{h_{FE3-1}}{h_{FE3-2}}$ 1/	0.9	1.0	
11	Forward- current transfer ratio (gain ratio)	3076	V_{CE} = 5 V dc; I_C = 100 µA dc; (see 4.5.4)	$\frac{h_{FE3-1}}{h_{FE3-2}}$ 1/	0.85	1.0	
12	Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 10 mA dc; pulsed (see 4.5.2)	Δh_{FE6} 2/		± 25% of initial recorded value	
13	Collector to base cutoff current	3036	Bias condition D; V_{CB} = 50 V dc	ΔI_{CBO1} 2/		±100 percent of initial reading or 4 nA dc, whichever is greater	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B and C electrical measurements - Continued.

Step	Inspection	MIL_STD--750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
14	Forward-current transfer ratio	3076	V_{CE} = 5 V dc; I_C = 1 mA dc	Δh_{FE5} 2/		±25 percent of initial recorded value	

1/ The larger number will be placed in the denominator.

2/ Devices which exceed the group A limits for this test shall not be accepted.

3/ The electrical measurements for appendix E, table VI a (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table II herein, steps 1, 3, 4, 6, 7, 8, 9, and 10.

b. Subgroup 4, see table II herein, steps 1, 3, 4, 6, 7, 8, 9, and 10.

c. Subgroup 5, see table II herein, steps 1, 3, 4, 6, 7, 8, 9, 10, 13, and 14.

4/ The electrical measurements for appendix E, table VI b (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1 and 9.

b. Subgroups 3 and 6, see table II herein, steps 2, 5, 11, and 12.

5/ The electrical measurements for appendic E, table VII of MIL-PRF-19500 are as follows:

a. Subgroups 2 and 3, see table II herein, steps 1, 3, 4, 6, 7, 8, 9, and 10 for JANS and steps 1 and 9 for JANTX and JANTXV.

b. Subgroup 6, see table II herein, steps 1, 3, 4, 6, 7, 8, 9, 10, 13, and 14 for JANS and steps 2, 5, 11, and 12 for JANTX and JANTXV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. See MIL- PRF-19500.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-EQE, Columbus, OH 43216.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AV, MI
Navy - AS, CG, MC
Air Force - 13, 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1837)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/336	2. DOCUMENT DATE (YYMMDD) 970521

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, UNITIZED, DUAL-TRANSISTOR, PNP, SILICON TYPES 2N3810, 2N3810L, 3N3811 AND 2N3811L, JAN, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE (Include Area Code) (1) Commercial (614)692-0510 (2) AUTOVON 850-0510
c. ADDRESS (Include Zip Code) Defense Supply Center Columbus, DSCC-VAT, Columbus, OH 43216	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:27Z
Check the source to verify that this is the current version before use.