MILITLRY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, POWER RECTIFIER
JAN TYPE - 1N1084


This amendment forms a part of Military Specification MIL-S-19500/318, dated 21 October 1964, and is approved for use by all Departments and and Agencies of the Department of Defense.

PAGE 1

* After title add:

"INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS AMENDMENT"

PAGE 2

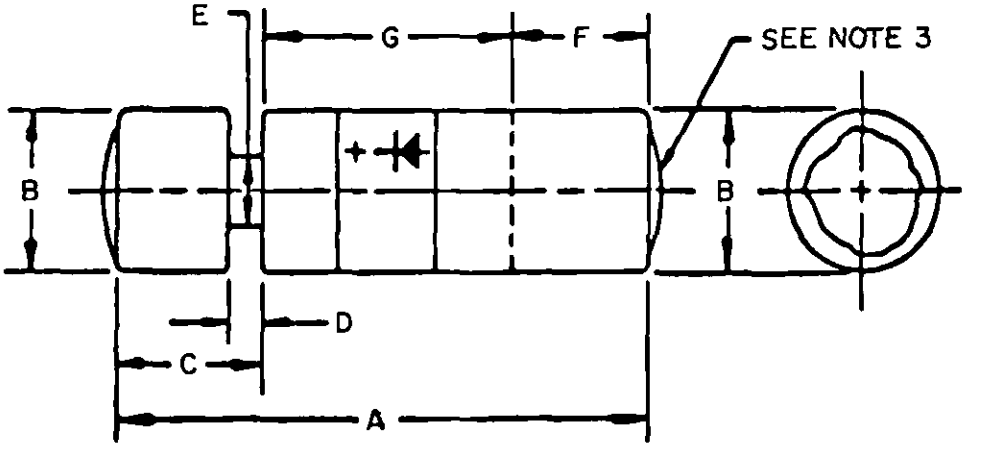

DIMENSIONS					NOTES
	INCHES		MILLIMETERS		
LTR	MIN	MAX	MIN	MAX	
A	.975	1.035	24.77	26.28	
B	.240	.260	6.10	6.60	
C	.230	.250	5.84	6.35	
D	.052	.072	1.32	1.82	
E	.100	.140	2.54	3.56	
F	.235	.260	5.97	6.60	
G	.500	.540	12.70	13.70	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. .015 inch solder blob allowance on each end.
4. Over length "G" the body diameter is permitted to extend to .375 max.

FIGURE 1. Semiconductor device, diode, type 1N1084.

FSC 5961
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

PAGE 3

* TABLE I, LTPD column, delete in its entirety.

TABLE I, subgroup 2, forward voltage, delete and substitute:

"

Examination or test	MIL-STD-750 Method	MIL-STD-750 Details	Symbol	Limits Min	Limits Max	Unit
"Forward voltage	4011	i_f = 3 A(pk), Pulse $t_p \leq$ 8.3 ms; duty cycle $\leq$ 2%	V_f	---	1.0	V(pk)

"

TABLE II, subgroup 2, end points and forward voltage, delete and substitute:

"

"End points: (see 4.6.1)						
Forward voltage	4011	i_f = 3 A(pk), Pulse $t_p \leq$ 8.3 ms; duty cycle $\leq$ 2%	V_f	---	1.0	V(pk)

"

TABLE II, subgroup 3, vibration, variable frequency test, details column: Delete "Operating; orientations X1, Y1, Monitor during test; Change in reverse current."

TABLE II, subgroup 8, endpoints and forward voltage, delete and substitute:

"

"End points: (see 4.6.1)						
Forward voltage	4011	i_f = 3 A(pk), Pulse $t_p \leq$ 8.3 ms; duty cycle $\leq$ 2%	V_f	---	1.1	V(pk)

"

PAGE 5

* 3.7, add the following new paragraph:

"3.7 Manufacturer eligibility. To be eligible to supply transistors to this specification, the manufacturer shall have a product assurance program approval in accordance with MIL-S-19500 for at least one line."

* 4.2, delete and substitute:

"4.2 Qualification inspection. Qualification inspection shall not be required."

* 4.4, delete and substitute:

"4.4 Group A inspection. Group A inspection shall consist of the examination and tests specified in table I on a 100 percent basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

4.6.1, Pulse technique, delete and substitute:

"4.6.1 *Time limit for end points.* End-point tests for qualification and quality-conformance inspection shall be completed within 96 hours after completion of the last test in the subgroup."

Project number: Delete "5960-1980" and substitute "5960-1908".

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR
Navy - SH
Air Force - 11, 85

User activities:
Army - MI
Navy - CG, MC, WP

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5961-0976)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.