MIL-S-19500/321A
AMENDMENT 3
19 September 1978
SUPERSEDING
AMENDMENT 2
17 September 1975

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, MIXER

TYPES 1N21WG, 1N21WGM, AND 1N21WGMR

This amendment forms a part of Military Specification MIL-S-19500/321A, dated 20 March 1967, and is aproved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* After the preamble, insert the following:

"

THIS SPECIFICATION INACTIVE FOR NEW DESIGN AFTER DATE OF THIS AMENDMENT.

"

PAGE 2

* 3.3: At end of paragraph, add "Organic package sealants may be used at the option of the manufacturer."

PAGE 3

FIGURE 1: Delete and substitute new figure 1 as printed on page 2 of this amendment.

PAGE 4

FIGURE 2: Delete and substitute new figure 2 as printed on page 3 of this amendment.

PAGE 6

TABLE II, Subgroup 1, Details column, second parenthetical statement: Delete "Dim. N, and M and ".

NOTE: The margin of this amendment is marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, OS, MC, CG, SH


Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5961-0681)

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

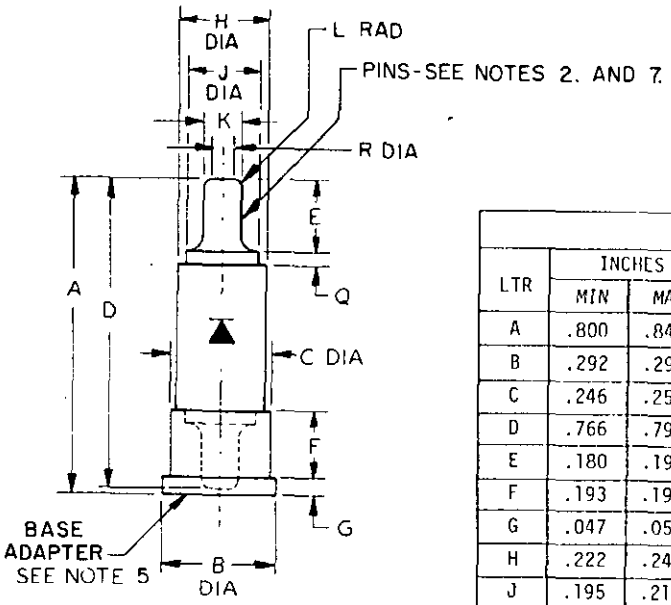

DIMENSIONS					
LTR	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	.800	.840	20.32	21.34	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D	.766	.792	19.46	20.12	
E	.180	.190	4.57	4.83	6
F	.193	.199	4.90	5.05	
G	.047	.057	1.19	1.45	
H	.222	.240	5.64	6.10	
J	.195	.215	4.95	5.46	6
K	.092	.094	2.34	2.39	2,5,6
L	.030	.046	.76	1.17	6
Q	.020	.030	.51	.76	6
R	---	.030	---	.76	6

NOTES:
1. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
2. The ends of both pins shall be smooth with no burrs or sharp edges. Within the diameter R a recess is allowed on the ends of the pins.
3. Metal parts shall be gold plated 10 msi minimum.
4. The polarity shall be indicated by an arrow, with the arrow pointing in the direction of easier current flow.
5. Removable base adapter shall establish the forward or reverse polarity.
6. Applies to both pins.
7. Eccentricity between both pins and the base dimension "C" shall not exceed .0075 (.190 mm).

FIGURE 1. Semiconductor device, diode, types 1N2lWG, 1N2lWGM, and 1N2lWGMR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.