The documentation and process conversion measures necessary to comply with this amendment shall be completed by 14 September 1994

INCH-POUND

MIL-S-19500/321A
AMENDMENT 5
28 May 1994
SUPERSEDING
AMENDMENT 4
30 June 1992

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, MIXER
TYPES 1N21WG, 1N21WGM, AND 1N21WGMR

This amendment forms a part of MIL-S-19500/321A, dated 20 March 1967, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* After the title, insert the following:

"
THIS SPECIFICATION INACTIVE FOR
NEW DESIGN AFTER 19 September 1978
"

1.2, add: "Burnout by multiple RF pulses (see 3.6)."

PAGE 2

3.3, at the end of paragraph, add: "Organic package sealants may be used at the option of the manufacturer."

3.6, delete and substitute:

"3.6 Burnout by single RF pulse. The following burnout by a single pulse, using the test conditions stated below shall be performed on a qualification basis only (LTPD = 10). Endpoint electrical measurements shall be group A, subgroup 2.

Test conditions: Method 4146 of MIL-STD-750, using drawing C66058, E = 125 V dc minimum, and with the adaptor affixed for forward operation.

Holder: See 4.2.1.

Test data demonstrating that the holder used meets this requirement shall be made available to the Government representative upon request."

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
3	3
4	4

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

PAGE 6

TABLE II, subgroup 1, details column, second parenthetical statement: Delete "Dim. N, and M and".

TABLE II, subgroup 2, examination or test column, add: "A separate sample may be used for each test."

PAGE 8

* CONCLUDING MATERIAL, delete and substitute as printed below:

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17


Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19, 85, 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5961-1595)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

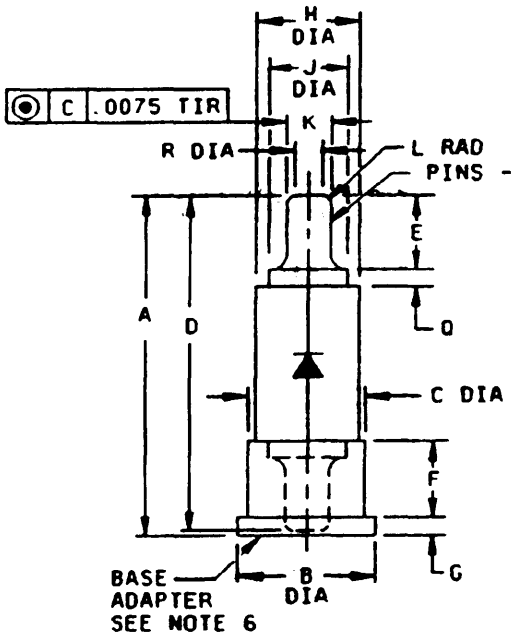


Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.800	.840	20.32	21.34	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D	.766	.792	19.46	20.12	
E	.180	.190	4.57	4.83	7
F	.193	.199	4.90	5.05	
G	.047	.057	1.19	1.45	
H	.222	.240	5.64	6.10	
J	.195	.215	4.95	5.46	7
K	.092	.094	2.34	2.39	3,6,7
L	.030	.046	.76	1.17	7
* Q	.017	.030	.43	.76	7
R	---	.030	---	.76	7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The ends of both pins shall be smooth with no burrs or sharp edges. Within the diameter R a recess is allowed on the ends of the pins.
4. Metal parts shall be gold plated 10 msi minimum.
5. The polarity shall be indicated by an arrow, with the arrow pointing in the direction of easier current flow.
6. Removable base adapter shall establish the forward or reverse polarity.
7. Applies to both pins.
8. Eccentricity between both pins and the base dimension "C" shall not exceed .0075 inches (.190 mm).

FIGURE 1. Semiconductor device, diode, type 1N21WG, 1N21WGM, 1N21WGMR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.

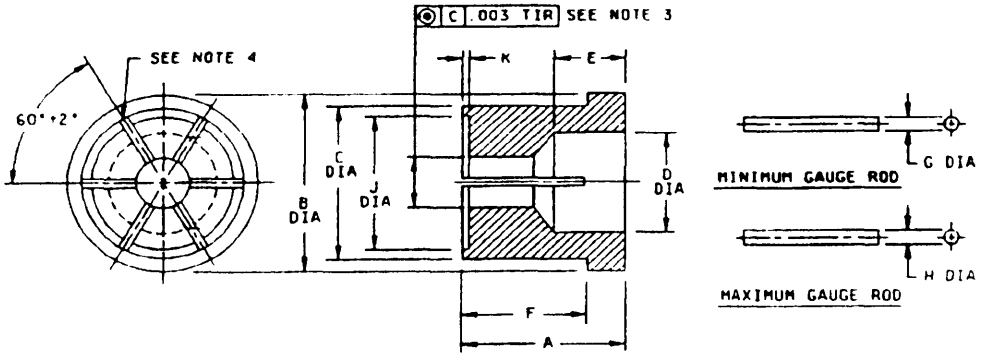

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.246	.254	6.25	6.45	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D	---	.187	---	4.75	
E	---	.100	---	2.54	
F	.195	.199	4.95	5.05	
G	.0915	.0920	2.324	2.337	
H	.0940	.0945	2.388	2.400	
J	.216	.221	5.49	5.61	
K	.031	.036	.79	.91	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. This diameter should be .100 inch (2.54 mm) maximum diameter before closing jaws. This diameter shall then be sufficiently closed, and the adapter so tempered that it will fit on the minimum gauge rod and also on the maximum gauge rod, in each case with a snug fit (for hand assembly).
4. Each slot shall be 0.013 inch (0.33 mm) minimum, 0.017 inch (0.43 mm) maximum wide by 0.185 inch (4.70 mm) deep before closing. The 6 slots are equally spaced.
5. The material for the adaptor shall be beryllium copper or half-hard brass in accordance with QQ-B-626, composition 22, and shall be gold plated 10 msi minimum.
6. All burrs and sharp edges shall be removed.

FIGURE 2. Removable base adaptor, included as a part of type -JAN- 1N21WG, 1N21WGM, 1N21WGMR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:20Z
Check the source to verify that this is the current version before use.