INCH-POUND

MIL-PRF-49167B(CR)
9 June 1997
SUPERSEDING
MIL-A-49167A(ER)
18 January 1982

PERFORMANCE SPECIFICATION

AUXILIARY CONTROL, VIDEO PL-1402/UA

This specification is approved for use within USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of common module, Auxiliary Control, Video PL-1402/UA which is one type of common module (see 6.1).

1.2 Classification.

1.2.1 Type designation. The type designation of this equipment shall be PL-1402/UA (see 3.1)

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Communications-Electronics Command, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ 07703-5023 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A: FSC 5855

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-P-11268	-	Parts, Materials, and Processes used in Electronic Equipment
MIL-M-13231	-	Marking of Electronic Items
MIL-P-55110	-	Printed Wiring Boards
MIL-C-55302	-	Connector, Printed Circuit Subassembly and Accessories, Plug, Pin Contacts, Right Angle
MIL-E-55585	-	Electronic Equipment and Parts, Packaging of

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-252	-	Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and other Devices
MIL-STD-726	-	Packaging Requirement Codes
MIL-STD-810	-	Environmental Test Methods
MIL-STD-2073	-	DoD Material Procedures for Development and Application of Packaging Requirements

HANDBOOK

DEPARTMENT OF DEFENSE

MIL-HDBK-454	-	General Guidelines for Electronic Equipment

(Unless otherwise indicated, copies of the above military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5093.)

2.2.2 Other government documents, drawings, and publications. The following other Government documents, drawings, and publications will form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

DRAWINGS

DL-SM-B-773228	-	Auxiliary Control, Video PL-1402/UA

2.3 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING AND MATERIAL (ASTM)

ASTM B194-92A	-	Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 11103-1187).

2.4 Order of Precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.2).

3.2 Materials. The contractor shall select the materials, but the materials shall be capable of meeting all the operational and environmental requirements specified herein. The parts and materials specified in MIL-P-11268, MIL-P-55110, MIL-C-55302, MIL-STD-2073, and ASTM B194-92A are recommended, but are not mandatory. Recovered materials shall be used to the maximum extent possible.

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

3.3 Design. Internal design of the auxiliary control module is the responsibility of the contractor. However, the auxiliary control module shall conform to the dimensional and interface requirements of DL-SM-B-773228 and its subsidiary drawings.

3.4 Weight. The weight of the auxiliary control module shall be 0.23, (+0.03 -0.05) pound.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

3.5 Performance characteristics.

3.5.1 Input power. The auxiliary control module shall operate from the supply voltages and current input power within the supply current limits as follows:

High power mode		Low power mode	
Supply voltage (Vdc)	Max supply current (mA)	Supply voltage (Vdc)	Max supply current (mA)
+10.0 ± 0.2 -7.5 ± 0.2	660 660	+4.8 ± 0.1 -4.8 ± 0.1 +7.0 ± 0.1 -7.0 ± 0.1	540 540 15 15

3.5.2 IR level and gate output. IR level and gate output shall be a rectangular waveform of +1.0 ±0.1 vdc and 0 to -1.5 ±0.1 vdc as shown in figure 1.

3.5.3 IR gain command voltages. The gain command voltage outputs for the auxiliary control module shall have a minimum adjustable range as listed:

Gain command voltages	High power mode	Low power mode
Gain command 1	Adjustable from -3.5 to +3.5Vdc	Adjustable from -2.0 to +2.0 Vdc
Gain command 2	Adjustable from -3.5 to +3.5Vdc	Adjustable from -2.0 to +2.0Vdc

3.5.4 Regulator output voltages. The positive and negative regulator outputs shall have a minimum adjustable range as listed:

Regulator output voltages	High power mode	Low power mode
Positive regulator output	Adjustable from +3.0 to +4.5Vdc	Adjustable from +3.0 to +3.5
Negative regulator output	Adjustable from -3.0 to -4.5Vdc	Adjustable from -3.0 to -3.5 Vdc

The positive and negative regulator output voltages, when fixed in the high power mode at +4.25 Vdc and -4.25 Vdc respectively, shall not vary by more than ±0.25 Vdc over the temperature range of -54°C to +71°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

3.5.5 IR polarity control outputs. IR polarity control outputs shall be +0.60, ±0.25 Vdc and shall be inverted with respect to each other.

3.5.6 Polarity transient suppression. Polarity transient suppression shall provide a gated level of +1.0, ±0.1 Vdc on the IR level and gate waveform for a duration of 140, ±40 milliseconds at each operation of polarity reversal.

3.5.7 Scan failure protect. The scan failure protect feature shall provide a continuous gated level of +1.0, ±0.1 vdc on the IR level and gate waveform when a gate signal is not received for a duration of greater than 120, ±40 milliseconds.

3.6 Environmental conditions.

3.6.1 Temperature shock. The auxiliary control module shall not be damaged (see 6.3.1) by sudden changes in temperature between -54°C and +95°C.

3.6.2 High temperature. The auxiliary control module shall not be damaged by storage to +95°C or continuous operation to +71°C, and shall operate for 30 minutes at +95°C.

3.6.3 Low temperature. The auxiliary control module shall not be damaged by operation to -54°C or storage to -62°C.

3.6.4 Shock. The auxiliary control module shall not be damaged by high intensity shocks of 100g's peak amplitude with 11 milliseconds duration and by bench handling tests.

3.6.5 Vibration. The auxiliary control module shall not be damaged by vibration over the frequency spectrum at the specified g levels and amplitudes shown in figure 2.

3.7 Reliability. The auxiliary control module shall have a mean time between failure (MTBF) of at least 17,500 hours θ_0.

3.8 Coating. Unless otherwise specified, the auxiliary control module and its components and parts shall be cleaned and coated in accordance with the contractor's established procedures.

3.9 Preconditioning. Each auxiliary control module shall be subjected to at least a 20-cycle preconditioning environment as specified in figure 3 prior to group A inspection. (For exception to this requirement see 6.2.h.

3.10 Marking. Mark directly or by label to include nomenclature, contract number, serial number, date, manufacturing code, part number, and national stock number. Use clear and legible lettering and a method of marking to withstand the operatng environment. MIL-M-13231 may be used as a guide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The equipment shall be free from defects that will affect equipment serviceability, interchangeability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.1.1 Inspection conditions. Except as otherwise specified herein, all examinations and tests shall be performed at a temperature of 80° ±20°F.

4.2 First article inspection. When specified in the contract, first article inspection shall be performed by the contractor, on a minimum of 3 sample units, after award of contract and prior to production. First article reliability (4.6) is not required unless specified in the contract. First article inspection shall be performed on sample units which have been produced with equipment and procedures normally used in production.

4.2.1 Inspection routine. First article inspection shall consist of all the examinations and tests in accordance with table I and II. These tests shall be conducted in the order specified for each group. One sample auxiliary control module is to remain at the contractor's plant and is to be available as a standard for comparative purposes.

4.2.2 Failure. If one or more sample auxiliary control modules fails to meet any of the first article requirements and tests, the contractor shall immediately notify the Government of the failure. The contractor shall determine the root cause of the failure and take appropriate corrective action. The contractor is required to submit a new set of first article samples which have incorporated the change for inspection. A description of the failure(s) and corrective actions(s) taken shall be included in the first article inspection reports. It is recommended that the failure mechanism be evaluated prior to restarting first article testing from the beginning on all new units.

4.2.3 Inspections. All materials, parts, processes and assemblies shall be examined for conformance to the applicable specification or drawing as indicated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

TABLE I. Inspections.

Inspection Requirement	Requirement paragraph	Inspection criteria
Any part or component missing or damaged	3.2	MIL-STD-252(Used as guide)
Weight not as specified	3.4	MIL-STD-252(Used as guide)
Soldering not as specified	3.10	MIL-HDBK-454(Used as guide)
Marking not as specified	3.11	MIL-M-13231(Used as guide)
Workmanship not as specified	3.12	MIL-HDBK-454(Used as guide)
Coating not as specified	3.8	
Dimensions not as specified Length and width	3.3	SM-D-773888
Dimensions not as specified Height, max, Solder/lead protrusion	3.3	SM-C-773501
Dimensions not as specified Pins, connector location Pins, guide location	3.3	SM-C-773541

4.2.4 Tests. Upon successful completion of inspections specified in 4.2.3, perform the tests of table II. Failure of any test shall constitute failure of first article inspection.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Input power	3.5.1	4.4.1
IR level & gate output	3.5.2	4.4.2
IR gain command voltages	3.5.3	4.4.3
Regulator output voltages	3.5.4	4.4.4
IR polarity control outputs	3.5.5	4.4.5
Polarity transient suppression	3.5.6	4.4.6
Scan failure protect	3.5.7	4.4.7
Temperature shock	3.6.1	4.5.1
High temperature	3.6.2	4.5.2
Low temperature	3.6.3	4.5.3
Shock	3.6.4	4.5.4
Vibration	3.6.5	4.5.5
Reliability	3.7	4.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

4.2.5 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities (see 6.2.i)

4.2.6 Inspection procedures. Unless otherwise specified herein:

a. The auxiliary control module shall be operated in the high power mode at an ambient temperature of +23°C, ±5°C.

b. The input power shall be in accordance with 3.5.1.

c. All test setup and load resistor tolerances shall be ±5 percent.

d. In the high power mode, the positive and negative voltage regulators shall be adjusted to an output voltage of +4.25, ±0.05 Vdc and -4.25, ±0.05 Vdc respectively.

e. In the low power mode, the positive and negative voltage regulators shall be adjusted to an output voltage of +3.25, ±0.05 Vdc and -3.25, ±0.05 Vdc respectively.

4.3 Conformance inspection.

4.3.1 Inspection of product for delivery. Inspection of product for delivery shall consist of Groups A, B, and C inspection. Test equipment for government verification inspection shall be made available by the contractor, if required.

4.3.1.1 Group A inspection. Each auxiliary control module on contract or purchase order shall be 100 percent inspected for conformance to the inspections in the order specified in table III. All failures shall be removed. Discrete lots shall be formed from auxiliary control modules that pass this inspection.

TABLE III. Group A inspection.

Examination or Test	Requirement Paragraph	Method or Test Paragraph
Visual-mechanical inspection		
Input power (high power mode only)	3.5.1	4.4.1
IR level & gate output	3.5.2	4.4.2
IR gain command voltages	3.5.3	4.4.3
Regulator output voltages	3.5.4	4.4.4
IR polarity control outputs	3.5.5	4.4.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

4.3.1.2 Group B inspection. Not required.

4.3.1.3 Group C inspection. Group C inspection shall be conducted on auxiliary control modules selected from units which have passed the tests in 4.3.1.1. The sample(s) shall be tested in accordance with the inspections listed in table IV. Samples shall be selected in accordance with 4.3.1.3.1 Group C tests listed in table IV may be performed in any order.

4.3.1.3.1 Sampling for group C inspection. Group C inspection samples shall be selected as follows:

Monthly lot size	Number of sample units monthly
1-99	1
100-299	3
300-499	5
500-999	7
1000 or more	10

TABLE IV. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Polarity transient suppression	3.5.6	4.4.6
Scan failure protect	3.5.7	4.4.7
Vibration	3.6.5	4.5.5

4.3.1.3.2 Group C failures. Actions required relative to group C failures shall be as specified in the contract (see 6.2).

4.3.1.3.3 Disposition of group C samples. Group C samples shall be accepted on contract subsequent to the tests of table III.

4.3.1.3.4 Group D inspection. Not required.

4.4 Test methods.

4.4.1 Input power. The input power for both high power and low power modes shall be measured with 10-ohm resistors, rated at 2 watts minimum each, connected to each of the outputs of the on-board regulators. Failure to meet the requirements of 3.5.1 shall constitute failure of this test.

4.4.2 IR level and gate output. The IR level and gate output shall be measured with an oscilloscope. The gate input shall be a 60 Hz, 0 to -6 volt square wave signal (amplitude and duty cycle adjustable). The IR level input shall be varied with an external 10,000 ohm potentiometer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

The waveform voltage limits shall be adjustable by potentiometers on the auxiliary control module. Failure to meet requirements of 3.5.2 shall constitute failure of this test.

4.4.3 IR gain command voltages. Gain command voltages 1 and 2 shall be monitored with an oscilloscope while the gain control input is varied through its limits. Failure to meet requirements of 3.5.3 shall constitute failure of this test.

4.4.4 Regulator output voltages. Regulator output voltages shall be determined using the conditions described in 4.6.1. The low power mode will require adjusting the positive and negative outputs from +3 Vdc to +3.5 Vdc and from -3.0 Vdc to -3.5 Vdc. The high power mode will require adjusting the positive and negative outputs from +3.0 Vdc to +4.5 Vdc and from -3.0 Vdc to -4.5 Vdc. Failure to meet requirements of 3.5.4 shall constitute failure of this test.

4.4.5 IR polarity control outputs. The IR polarity control outputs shall be measured with a voltmeter when the polarity control is switched from the inverting position to the noninverting position. Failure to meet requirements of 3.5.5 shall constitute failure of this test.

4.4.6 Polarity transient suppression. The polarity transient suppression feature shall be tested by monitoring the IR level and gate output on channel A and the polarity input on channel B of the dual-channel oscilloscope with storage capability. As the polarity input is switched, the duration of the gated portion of the IR level and gate waveform shall be measured and verified. Failure to meet requirements of 3.5.6 shall constitute failure of this test.

4.4.7 Scan failure protect. The scan failure protect feature shall be tested by monitoring the IR level and gate output on channel A and the IR gate input on channel B of the dual-channel oscilloscope. A square wave generator shall be used to provide the IR gate input, and its frequency shall be decreased to approximately 4 Hz to determine the threshold at which the IR level waveform begins to return to its gated state. The duration from IR gate input transition to the threshold of IR level and gate output shall be measured and verified. Failure to meet requirements of 3.5.7 shall constitute failure of this test.

4.5 Environmental tests. The operating tests required before, during and after the environmental tests shall be those listed in table III. MIL-STD-810 may be used as a guide.

4.5.1 Temperature shock. With MIL-STD-810, Method 503, Procedure I, used as guide, except that the temperature of step 2 shall be -54°C and the temperature of step 1 and step 4 shall be +95°C. The auxiliary control module shall not be operated during the temperature shock test (no measurements taken during this test). Failure to meet requirements of 3.6.1 shall constitute failure of this test.

4.5.2 High temperature. With MIL-STD-810, Method 501, Procedure I, used as guide, except that the temperature of step 2 shall be +95°C and the auxiliary control module shall be operated using the test setup of 4.6.1 for the final 30 minutes of step 3 (no measurements taken during step 3). The temperature of steps 4 and 5 shall be +71°C. The operating test of 4.4.4 shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

be performed in place of the table III tests during the high temperature test. Failure to meet requirements of 3.6.2 shall constitute failure of this test.

4.5.3 Low temperature. With MIL-STD-810, Method 502, Procedure I ,(see figure 5), used as guide, except that the storage temperature of step 2 shall be -62°C and the low operating temperature of step 4 shall be -54°C. The operating test of 4.4.4 shall be performed in place of the table III tests during the low temperature test. Failure to meet requirements of 3.6.3 shall constitute failure of this test.

4.5.4 Shock. A nominal duration of 11 msec. The auxiliary control module shall not be operated during the shock test (no measurements taken during this test). Failure to meet requirements of 3.6.4 shall constitute failure of this test.

4.5.5 Vibration. With MIL-STD-810, Method 514.1, Procedures I and VIII, used as guide, except that the curve shown in figure 2 of this specification shall be used in lieu of the MIL-STD-810 curve. The sinusoidal cycle time shall be 120 minutes per axis. The dwell time shall be 1/6 of the cycling time at each resonance. The auxiliary control module shall not be operated during the vibration test. Failure to meet requirements of 3.6.5 shall constitute failure of this test.

4.6 Reliability.

4.6.1 First article reliability. The lower test MTBF (θ_1) shall be demonstrated in accordance with the following subparagraphs.

4.6.1.1 Test level.

Temperature +50°C, (+5 -0)°C

Temperature cycling - None

Vibration - 2.2 g, ±10 percent peak acceleration value at any nonresonant frequency between -20 and 60 Hz measured at the mounting points of the equipment. The duration of vibration shall be at least 10 minutes during each hour of equipment operating time. The vibration shall be perpendicular to the plane of the printed circuit board.

Equipment on-off cycling - Turn on and let temperature stabilize, hold for 3 hours, then turn off and let temperature stabilize. This cycle shall continue throughout the test.

4.6.1.2 Parameters. The discrimination ratio θ_0 / θ_1 shall be 3.

4.6.1.3 Failure criteria and test length. The tests of table III shall be performed at least once prior to and once after the tests of 4.6.1. Additional testing of table III may be selected by

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

the contractor. The results of all table III tests and any physical damage shall be used to determine the success or failure of the reliability test. In the event of a table III test failure, the time interval between the preceding successful test and the failure shall not contribute to the total cumulative hours. Testing shall continue until the total hours together with the total count of relevant equipment failures permit either an accept or reject decision in accordance with figure 6. Only equipment "on" time shall contribute to the total unit hours. No single equipment's "on" time shall be less than one-half the average operating time of all equipment on test.

4.7 Preconditioning. Each auxiliary control module, in a nonoperating mode, shall be subjected to at least 20 cycles as specified in figure 3. Preconditioning may be performed before or after conformal coating.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The auxiliary control module is intended for use in infrared systems.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Issue of DoDISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.2.) .

c. Packaging requirements (see 5.1).

d. First article tests are required except for existing suppliers (see 6.3.2).

(1) Time frame for submission of first article test reports when first article tests are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

(2) Time frame for approval of first article test reports when first article tests are required.

(3) First article reliability testing if required.

e. Production delivery schedule.

(1) Defined in terms of monthly lots.

(2) Actions required relative to group C failures (see 4.3.1.3.2).

f. Preservation shall be in accordance with good commercial practice; however, MIL-STD-726, coded as follows, may be used for guidance:

(1) Level A. 2M-1-1-ϕϕ-00-NV-X-XX-P-ED-A

(2) Level B. 1ϕ-1-1-ϕϕ 00-NV-X-B7-P-ED-B

g. Packing and marking shall be in accordance with good commercial practice; however, MIL-E-55585 may be used for guidance.

h. MIL-STD-810B is to be used as a guide for environmental tests of 4.5.

i. The preconditioning requirement 3.9 and inspection 4.8 are required for procurement of all modules to this specification made directly for the Government. Implementation of 3.9 and 4.8 may be waived by system contractors ordering modules to this specification for use in the manufacture of complete systems if these systems or subassemblies thereof are subjected to equivalent preconditioning.

j. Deliver all first article samples to Commander, CECOM, ATTN: AMSEL-LC-IEW-N-TI, Fort Monmouth, NJ 07703.

k. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or procuring activity for recommended disposability methods.

l. Group C inspection monthly sample size to be established based on cumulative total concurrent contracts.

m. The following paragraphs should be included in the solicitation and contract/purchase order:

6.3 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

6.3.1 Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component; and any degradation of auxiliary control module performance to values less than specified herein.

6.3.2 Existing suppliers. Suppliers who are currently supplying equipment to this specification with a minimum average monthly rate of 10 units per month over the most current 12-month period. If a supplier cannot maintain the minimum monthly average, a first article test (less reliability) performed annually shall sustain the existing supplier's status when performed on 3 units manufactured by the supplier explicitly for this test. Upon implementation of this specification, suppliers who are then supplying equipment to specification B2-28A050117, Auxiliary Control Video, PL-1402/UA, with the minimum monthly delivery rate specified above shall be considered as existing suppliers.

6.4 Subject term (keyword) listing.

Auxiliary Control
Video

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - CR

Preparing activity
Army - CR

(Project 5855-0155)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

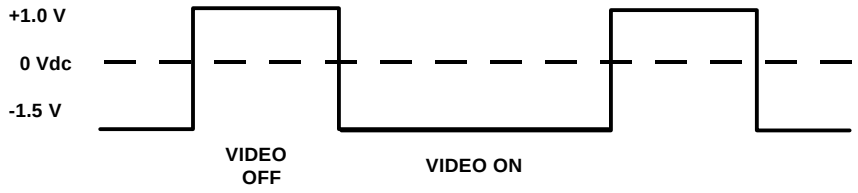


FIGURE 1. IR level and gate output.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

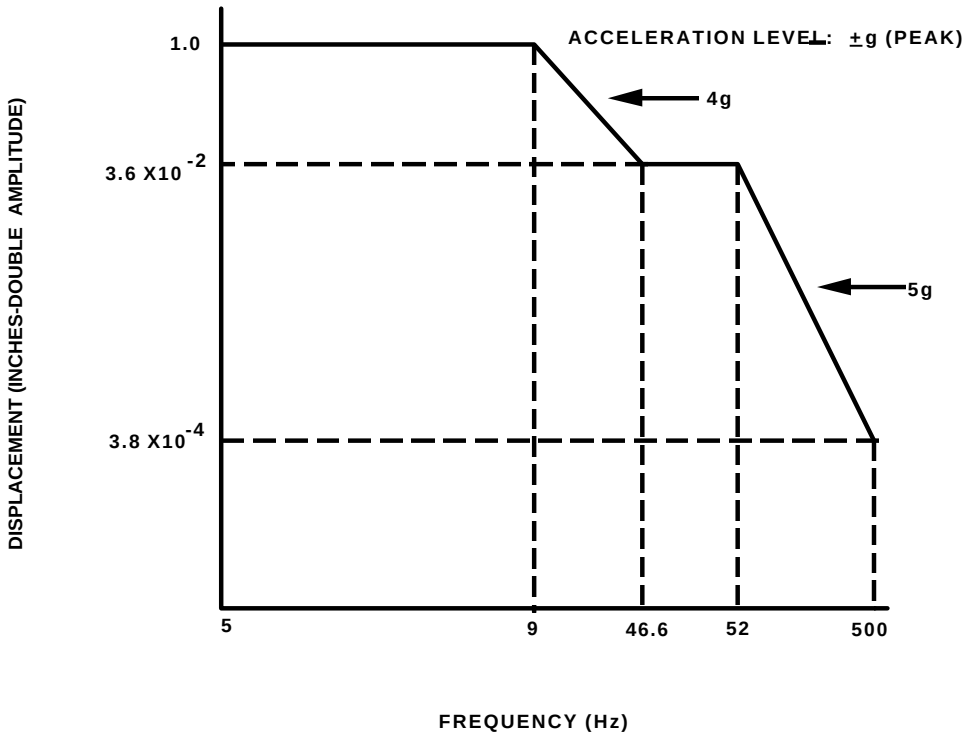


FIGURE 2. Vibration test profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.


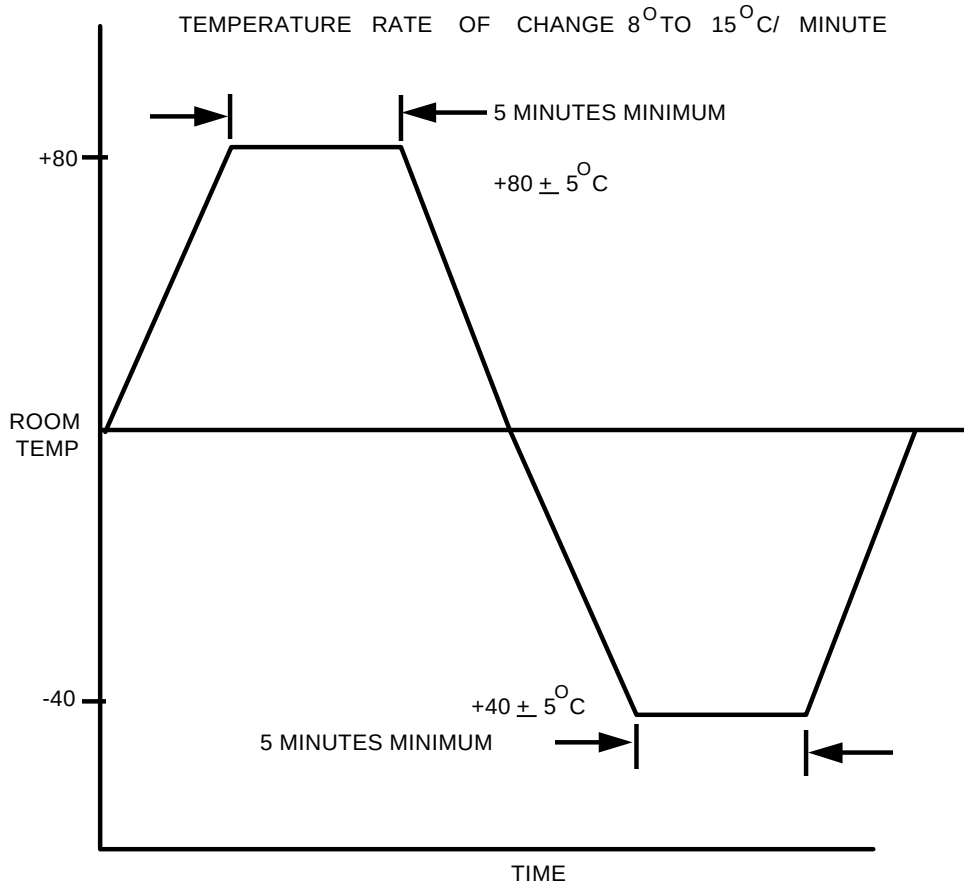


FIGURE 3. One preconditioning cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

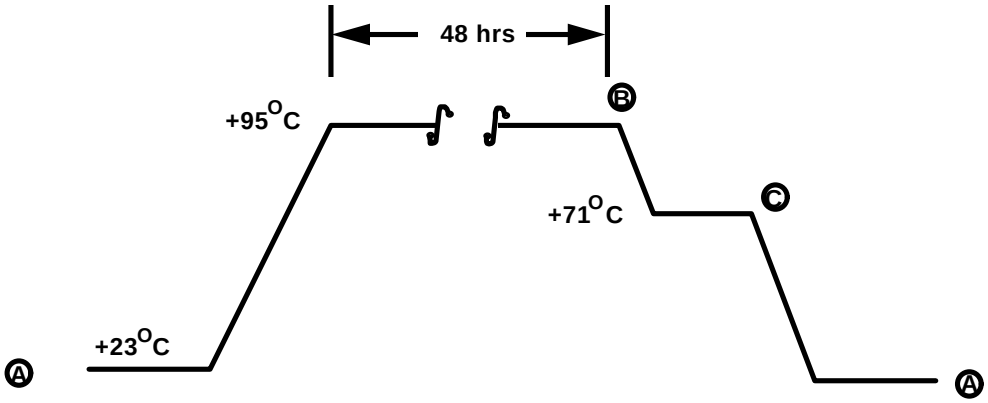


A GROUP A TESTS (TABLE III) ARE CONDUCTED AT THESE POINTS.

B TEST ITEM IS OPERATED FOR 30 MINUTES AT THIS POINT.

C REGULATOR OUTPUT VOLTAGES TESTS (4.6.4) ARE CONDUCTED AT THIS POINT.

FIGURE 4. High temperature test profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

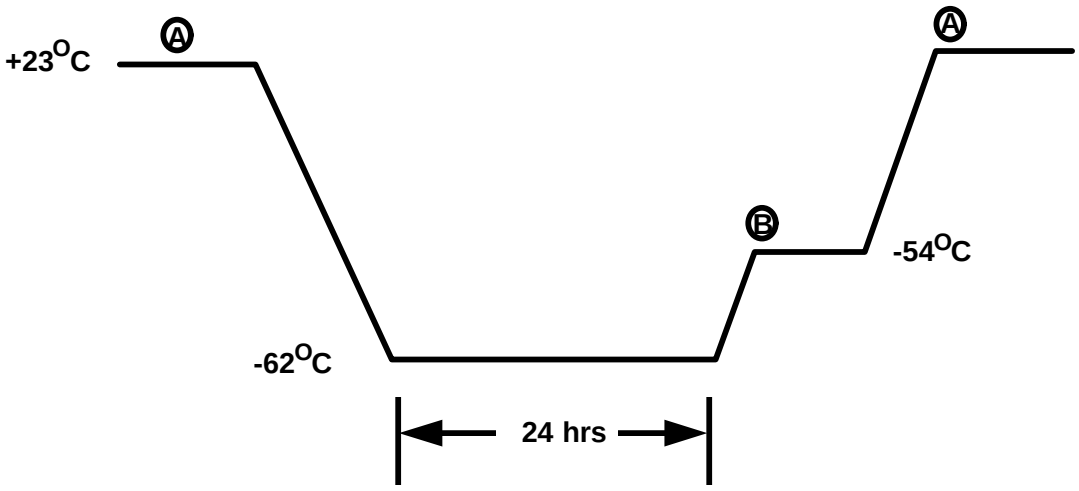


Ⓐ **GROUP A TESTS (TABLE III) ARE CONDUCTED AT THESE POINTS.**

Ⓑ **REGULATOR OUTPUT VOLTAGES TESTS (4.6.4) ARE CONDUCTED AT THIS POINT.**

FIGURE 5. Low temperature test profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

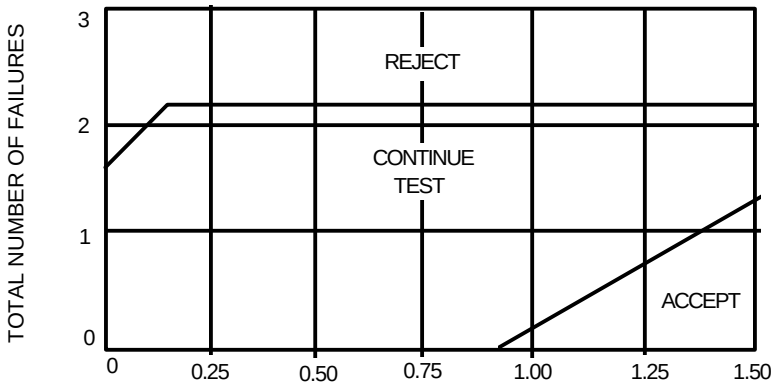

TOTAT TEST TIME*

NUMBER OF FAILURES	REJECT EQUAL OR LESS	ACCEPT (EQUAL OR MORE)
0	NA	0.89
1	NA	1.44
2	0.12	1.50
3	1.50	NA

* TOTAL TEST TIME IN TOTAL UNIT HOURS OF EQUIPMENT "ON TIME" AND IS EXPRESSED IN MULTIPLES OF LOWER TEST MTBF, θ_1

FIGURE 6. First article reliability accept - reject criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-49167B(CR)	**2. DOCUMENT DATE (YYMMDD)** 970609

3. DOCUMENT TITLE **AUXILIARY CONTROL, VIDEO PL-1402/UA**

4. NATURE OF CHANGE **(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)**

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army Communications-Electronics Command	b. TELEPHONE (Include Area Code) (1) Commercial (732)427-3450	(2) AUTOVON 987-3450
c. ADDRESS (Include Zip Code) ATTN: AMSEL-LC-LEO-E-EP Fort Monmouth, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:53Z
Check the source to verify that this is the current version before use.