INCH-POUND
MIL-DTL-24784/10D(NAVY)
6 June 2017
SUPERSEDING
MIL-DTL-24784/10C(NAVY)
3 November 2007

DETAIL SPECIFICATION SHEET

TRAINING AID BOOKLET (TAB) REQUIREMENTS FOR NAVAL SHIPS SYSTEMS

This specification is approved for use by the Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24784.

1. SCOPE

1.1 Scope. This specification sets forth requirements for the preparation of Training Aid Booklets (TABs) for use on naval ships (see 6.2).

1.2 TAB coverage. The TAB is a schematic and pictorial representation of systems and equipment installed onboard a specific ship. The TAB coverage does not include maintenance information, nor does the TAB coverage include the internal details of nomenclature type or otherwise uniquely identified systems or equipment documented by other technical manuals (TMs) supplied onboard a ship.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-24784 - Manuals, Technical: General Acquisition and Development Requirements, General Specification for

(Copies of this document are available online at http://quicksearch.dla.mil/.)

Comments, suggestions, or questions on this document should be addressed to: Commander, Naval Sea Systems Command, ATTN: SEA 05S, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC 9830 AREA TMSS

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASME INTERNATIONAL

ASME Y14.38 - Abbreviations and Acronyms for Use on Drawings and Related Documents

(Copies of this document are available online at www.asme.org.)

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, INC. (IEEE)

IEEE 315 - Graphic Symbols for Electrical and Electronics Diagrams (Including Reference Designation Class Designation Letters)

(Copies of this document are available online at www.ieee.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Preparation of digital data for page-oriented printed delivery. The source information for the TAB shall be prepared in the Extensible Markup Language (XML) or the Standardized General Mark-Up Language (SGML) in accordance with MIL-DTL-24784.

3.2 Format and development instructions. Unless otherwise specified by the acquiring activity or herein (see 6.2), the writing style, safety precautions, tabular material, graphics, and numbering shall be in accordance with MIL-DTL-24784.

3.2.1 Format and layout. All typed and illustrative matter developed for final production shall be in a horizontal (landscape) format. Layout of text pages shall be in accordance with figure 1. Layout of illustration pages shall be in accordance with figure 2 or 3, as appropriate.

3.2.2 Marginal copy. The marginal copy shall consist of running heads and feet of illustration titles. The marginal copy shall be located on each page as indicated in figures 2 and 3. Format for 4¼- by 11-inch TABs shall be in accordance with figure 2 and shall maintain the same margins and marginal copy.

3.2.3 Running heads. The running head for each page shall include the ship applicability notation (ship class or hull number), security classification (supplement) or distribution limitation, NAVSEA publication identification number, and the generic title of the diagram or contents (see 3.4.6.1).

3.2.4 Running feet. All page numbers shall be located at the lower outside of the page, approximately ¼ inch from the bottom and ¼ inch from the outside edge.

3.2.5 Page size. Unless otherwise specified by the acquiring activity (see 6.2), the page size for all preliminary and final TABs shall be 11 by 8½ inches with a maximum image area of 9½ by 7½ inches (see figure 1). When the increased cost of production can be justified by the effectiveness of the page layout, the alternate page size of 4¼ by 11 inches shall be specified. When this alternate is specified, the acquisition documents shall prohibit the use of foldouts. The use of fold-ups shall be prohibited in all manuals.

3.2.6 Illustration titles. Titles shall be located adjacent to the page number. The primary source document from which the illustration was developed shall be identified immediately below the illustration title in the manner shown on figures 2 and 3.

3.2.7 Line widths. Line artwork shall be prepared with line widths of sufficient size and strength to reproduce a minimum final line width, without dropout (when reduced), of 0.01 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

3.2.8 Piping illustrations. Pipe sizes shall be indicated by line width. A code to indicate the pipe size scale shall appear on the illustration. Recommended pipe size scale for oversized artwork is shown on figure 4.

3.2.9 Electrical system illustrations. Electrical distribution wire and cable sizes shall be annotated on the illustration. Bus bars shall be depicted in rectangular form and identified accordingly.

3.2.10 Illustration size. All original artwork shall be prepared for reproduction at final sizes as indicated on figure 2 (9½ by 7½ for single illustration pages) and figure 3 (9½ by 3½ for double illustration pages).

3.2.11 Multiple or parallel installations. Only one system shall be illustrated when multiple or parallel systems or components are installed in the ship. A note shall be added to the illustration to indicate the existence of the system(s) or component(s) not shown.

3.2.12 Color in illustrations. When approved by the acquiring activity (see 6.2), color graphics, illustrations, and photographs may be used. Developers should be aware that not all display devices will display full color. Color shall be viewable in the safe color palette colors (see figure 45 of MIL-DTL-24784) without loss of meaning, and shall also be printable in grayscale. The color-coded drawing copies shall identify each color by number and variation of use. When applicable, consideration should be given to use of color and potential impact on Print-On-Demand System compatibility requirements. When color is not authorized, shadings, cross-hatchings, and patterned lines may be used instead of color.

3.3 Arrangement. Unless otherwise specified by the acquiring activity (see 6.2), the manual shall be arranged in a standardized format (that is front matter, technical content, appendices, glossaries, indices, and Technical Manual Deficiency/Evaluation Report [TMDER]) and appropriately divided by volume, part, chapter, and section in accordance with Appendix A of MIL-DTL-24784 and the following subparagraphs.

3.3.1 Division of coverage. The TAB shall consist of at least two unclassified volumes. A third volume (supplement) shall be used when classified information must be included in the TAB coverage. The division of coverage shall be as follows:

a. Volume 1 - Piping systems.

b. Volume 2 - Electrical and electronic systems.

c. Volume 3 - Supplement (classified data applicable to both volumes).

3.3.2 Volume and part limitation. Volumes, or parts thereof, shall not exceed 500 pages (250 sheets).

3.3.3 Cover or title page. The cover or title page shall be prepared as shown in Appendix A of MIL-DTL-24784, except that it shall be prepared in a horizontal (landscape) format.

3.4 Technical content. The technical content of each volume of the TAB shall be arranged as follows:

a. General information.

b. List of abbreviations.

c. List of symbols.

d. System and component designation tables.

e. Perspective and plan views.

f. System and component diagrams.

3.4.1 General information. General information shall include, as a minimum, the following data:

a. Full title and Government identification numbers of all volumes and separately bound parts of volumes comprising the TAB (including supplements).

b. Explanation of the purpose and scope of the TAB.

c. Explicit applicability of the TAB.

d. Brief synopsis of the content of each volume.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

e. Brief description of the graphic techniques used in the TAB.

f. Statement on reporting of errors (see TMDER in Appendix A of MIL-DTL-24784).

3.4.1.1 Use of general information page(s). The general information shall be included in each volume of the TAB and shall be identical.

3.4.1.2 Multipart volumes. When multiple parts are used for Volume 1 or Volume 2 (or both) of the TAB, the general information shall be included only in Part 1 of each volume.

3.4.2 List of abbreviations. A complete listing of abbreviations and their meaning shall be included in each volume immediately following the general information. For multipart volumes, the list of abbreviations shall appear in Part 1 only.

3.4.2.1 Nonstandard abbreviations. The use of nonstandard abbreviations shall be held to a minimum. Nonstandard abbreviations shall be used only when no authorized equivalent exists in ASME Y14.38. When used, nonstandard abbreviations shall not be in conflict with an ASME Y14.38 abbreviation.

3.4.3 List of symbols. A list of symbols shall be included in each volume (Part 1 only, on multipart volumes) of the TAB immediately following the list of abbreviations. The listing for each volume shall be limited to symbols used in the applicable volume, but shall be inclusive of all symbols used therein.

3.4.3.1 Symbols. Graphic symbols for use on TAB diagrams shall be in accordance with IEEE 315.

3.4.3.1.1 Nonstandard symbols. The use of nonstandard symbols shall be held to a minimum. Nonstandard symbols shall be used only when no authorized equivalent exists in the documents specified above. Where nonstandard symbols are used, explanations shall be provided. When used, nonstandard symbols shall not be in conflict with the above documents.

3.4.4 System and component designation tables. Data shall be included in tabular form to explain the use of color codes, piping system designators, location identification numbers for controls and instruments, switchboard and circuit breaker identifications, and so forth and shall be arranged in logical order immediately following the list of symbols. Any other data that will enable users to better understand the TAB shall be presented in additional tables or by notes positioned near the system or component illustrations to which they apply.

3.4.5 Perspective and plan views. Perspective and plan views (see figure 5) shall be included in the TAB to illustrate such specific aspects of the ship as:

a. Antenna and mast arrangements.

b. Exterior installations including superstructure details and cavity drain systems.

c. Compartment and access arrangements.

d. Arrangement of tanks.

e. Electrical generator location and numbering.

f. Bulkheads (pressure).

g. Hull and hull openings.

h. Tanks and compartments (volumes).

3.4.6 System and component diagrams. Each installed system (piping, electrical, and electronic) shall be illustrated through the use of functional schematic diagrams (see figures 6 and 7). Where essential to the understanding of system operation, components of the system shall be separately illustrated and may be depicted using other types of drawings, such as perspective, orthographic projection, cross-section, or isometric projection. Text shall be restricted to safety precautions and shall only be used to provide instructions or explanations, which cannot be covered by annotating the illustrations. Systems that shall be covered include, but are not limited to, the following categories:

a. High-pressure air systems.

b. Low-pressure air systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

c. Ventilation systems.

d. Gas (refrigerants, oxygen, compressed gasses, and so forth) distribution systems.

e. Water (potable, sea water, air-conditioning, chilled water for electronic system cooling, waste, drain, and so forth) systems.

f. Hydraulic systems.

g. Electric power (60 hertz [Hz] and 400 Hz alternating current [AC], 250 volts direct current [VDC], and battery) generation and distribution systems.

h. Interior communication (IC) systems.

i. Fire alarm, firefighting, and damage control systems.

j. Steam systems.

k. Feed and condensate systems.

l. Distilling plant systems.

m. Fuel and lube oil systems.

n. Those systems presently covered by the engine room fluid systems composite.

o. Salvage systems.

p. Oxygen generator, CO_2 scrubber, and CO-H_2 burner.

q. Electronic equipment cooling flow.

r. Escape systems.

3.4.6.1 Specific examples. Specific examples of system and component diagrams to be included are presented below. Note that the generic categories and titles under which the examples have been placed are neither exclusive nor all encompassing.

VOLUME 1 - PIPING

Air-Conditioning and Ventilation:

- Air-Conditioning Chilled Water System
- Refrigerant 11 Air-Conditioning Plant
- Ventilation and Air-Conditioning Control System
- Ventilation System
- Ventilation Flow Diagram

Atmosphere Systems and Components:

- Atmosphere Analyzing System
- CO_2 Removal System
- CO-H_2 Burner
- Lithium Bromide Absorption System
- Main Oxygen System
- Oxygen Generator System

Compressed Air Systems and Components:

- High-Pressure (HP) Air System
- HP-Air System Air Dryer
- HP-Air Compressor Condensate Drain
- 700-lb/in² Service Air System

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

100- and 150-lb/in² Service Air Systems
20-lb/in² Service Air System
Diesel Engine Air Start

Emergency Systems:
Air Salvage System
Emergency Air Breathing System
Forward and After Escape Trunks

Fuel Oil Systems:
Diesel Generator Fuel System
Fuel and Compensating Water System
Fuel Filter Separator

Fresh Water Systems and Components:
Fresh Water Drain Collecting System
Plumbing System
Potable Water System
3000 Gallons per Day Distilling System
1800 Gallons per Day Distilling System
Auxiliary Fresh Water Cooling System
Diesel Generator Fresh Water Cooling System

Hydraulic Systems and Components:
Hydraulic Power Plant
Main and Vital Hydraulic System
External Hydraulic System
Snorkel Mast Hydraulic Operation
Periscope Hydraulic Operation
Antenna Masts Hydraulic Operation
Hydraulic Accumulator Indicators
Steering Hydraulic System
Fairwater Planes Hydraulic System
Stern Planes Hydraulic System
Windlass and Capstan Hydraulic Operation
Steering and Diving Control Station

Lube Oil Systems and Components:
Diesel Generator Lube Oil System
Main Lube Oil System
Shaft Lube Oil System
Ship Service Turbine Generator (SSTG) Lube Oil System
Turbine Lube Oil Fill, Transfer, and Purification System

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

Main Ballast Tank (MBT) Systems and Components:

- MBT Flooding and Venting
- MBT HP Blow System
- MBT HP Blow Valves
- MBT LP Blow System

Sea Water Systems and Components:

- Main Sea Water Cooling System
- Main and Auxiliary Sea Water Hull and Backup Valve Operation
- Auxiliary Sea Water Cooling System
- Air-Conditioning Sea Water Cooling System
- Diesel Generator Sea Water Cooling System
- Drain System
- Auxiliary Drain System
- Gravity Drains
- Surge Tank Arrangement

Snorkel System:

- Snorkel System and Panels
- Inboard and Outboard Induction and Ventilation Exhaust Valves
- Induction Head Valve
- Inboard and Outboard Diesel Exhaust Valves

Steam Systems and Components:

- Auxiliary Steam System
- Gland Seal and Exhaust Systems
- High Pressure Steam Drain System
- Steam Generator Cutout Valve Operation
- Main Steam Root Valve and Crossover Valve Operation

Trim System and Components:

- Trim System Suction and Discharge Valves
- Trim System - Forward and Aft
- Hovering and Depth Control System

Miscellaneous Systems and Components:

- Battery Electrolyte Agitation System
- Clutch Control System
- Depth Gage Piping
- Floating Wire Antenna Operating Gear
- Forward and After Signal Ejectors
- Mode Selector Switch
- Propulsion Turbine Throttle Valve and Governor Operation

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

Refrigeration System
SSTG Throttle Valve and Governor Operation
Torpedo Loading, Stowage, and Handling
Torpedo Firing Sequence
Torpedo Tube Hydraulic System
Torpedo Tube Flood and Drain System
Trash Disposal Unit
Trash Disposal Compactor
Vibration Reducer Control System

VOLUME 2 - ELECTRIC - ELECTRONICS

Electric Propulsion:
Electric Propulsion Motor Control
Propulsion Clutch and Hydraulic Pump Control
Secondary Propulsion Motor Control
Storage Battery - Cell Arrangement and Metering

Electric Power Generation and Control:
Electric Power Sources and Major Circuit Breakers
Motor Generator Sets Operating Controls
SSTG Sets Operating Controls
Diesel Generator Control
Electric Power Generation Block Diagram
400-Hz Motor Generator Sets Control
Synchronizing Scheme Diagram
Electric Plant Circuit Breakers Control
Ground Detection

Electric Power Distribution and Lighting:
Ship Service 400-Hz Power Distribution
Outboard Lighting
Ship Service Lighting Power Distribution
Emergency Lighting Power Distribution

Electrical Auxiliaries:
Lube Oil and Fuel Oil Equipment
Auxiliary Sea Water Cooling Pumps Equipment
Main Sea Water Cooling Pumps Equipment
Auxiliary Fresh Water Cooling Pumps Equipment
Main Feed Pumps Equipment
Main Condensate Pumps Equipment
Ventilation and Heating Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

Air-Conditioning Equipment
High-Pressure Air Compressor and Low-Pressure Blower Equipment
Trim and Drain Pumps and Submersible Pumps Equipment
Hydraulic Power Plant Equipment
Distilling Equipment
Atmosphere Analyzer System
Hydrocarbon Analyzer System
Air Sampling and Analysis Equipment
Atmosphere Cleansing and Replenishment Equipment
Galley and Laundry Equipment
Refrigeration Equipment

Interior Communications:
MBT Vent Valves Indicators and Control System
Ballast Control Panel
Ballast Control Panel Common Alarm Circuits
Depth and Course Control System
Hovering and Depth Control System
Ship Control Panel
Pressure Indicating System
Snorkel System
Hull Opening Indicator and Control System
Trim and Drain Indicator and Control System
High Pressure Air Indicator and Control System
Electronic Mast Position and Hoist Control System
Remote Tank Level Indicator System
Trim and Drain Pump Remote Flow Indicator System
Refrigeration Temperature Indicator System
Hydraulic Accumulator Contents Indicator System
Rudder, Fairwater, and Stern Planes Angle Indicator System
Depth Indicator System
Ship Safety Alarm System
Dead Reckoning System
Maneuvering Room Panel Common Alarm Circuits
Reactor Compartment Bilge Liquid Level Indicator and Alarm System
Propeller Shaft Revolution Indicator System
Engine Order and Wrong Direction Indicator System
Battery Electrolyte Agitation System
Battery Air Flow Indicator System
Hydrogen Detector System
Gyrocompass Repeater and Gyrocompass System
Underwater Log and Dummy Log System

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

- Ships Angle Indicator System
- Trim Angle Indicator System
- Main and Auxiliary Sea Water System Status Panel
- Sea Water Valve Control and Position Indicator System
- Salinity Indicator System
- Temperature Monitoring System
- Electronic Equipment Cooling Water Temperature and Flow Monitoring System
- Propeller Shaft IC Circuit
- Diesel Generator IC Circuit
- Integrated Announcing System
- Officer Call System
- Dial Telephone System
- Sound Powered Telephone System

Steam Plant:

- Steam Plant Valve Position Indicator System
- Steam Plant Alarms

Electronic Systems:

- 60 Hz Electronics Power Distribution
- 400 Hz Electronics Power Distribution
- Electronic Counter Measures (ECM) Systems
- Radar Systems:
  - Surface Search
  - Air Search
  - Tracking
  - Identification, Friend or Foe (IFF)
- Radio Systems:
  - Communications
  - Tactical
  - LORAN
  - SatNav
  - Radio Direction Finder (RDF)
- Sonar Systems:
  - Receiving
  - Detecting Ranging
  - Depth Sounding
  - Distress Alert
  - Underwater Telephone
  - Tracking - Speed
  - Hydrophone and Transducer Arrangement

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Verification. The verification requirements shall be in accordance with MIL-DTL-24784.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. TABs prepared in accordance with this specification are primarily intended as a training aid for use by the naval ship crews studying the installed systems of the ship. The TAB is also intended to be used as a reference document by engineering and technical personnel.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification (or any Technical Manual Contract Requirement [TMCR] referencing this specification).

b. Type and quantity of the manual required (see 1.1).

c. Indicate format items, if other than specified (see 3.2).

d. Page size, if other than specified (see 3.2.5).

e. Color in illustrations, when approved (see 3.2.12 and MIL-DTL-24784).

f. Arrangement, if other than standardized format (see 3.3).

g. Packaging requirements (see 5.1).

6.3 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been authorized and assigned an Acquisition Management Systems Control (AMSC) number or a TMCR based on those specifications and standards must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

6.4 Definitions. The words or phrases used throughout this specification sheet are defined in MIL-DTL-24784.


6.5 Subject term (key word) listing.

Equipment

Pictorial

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

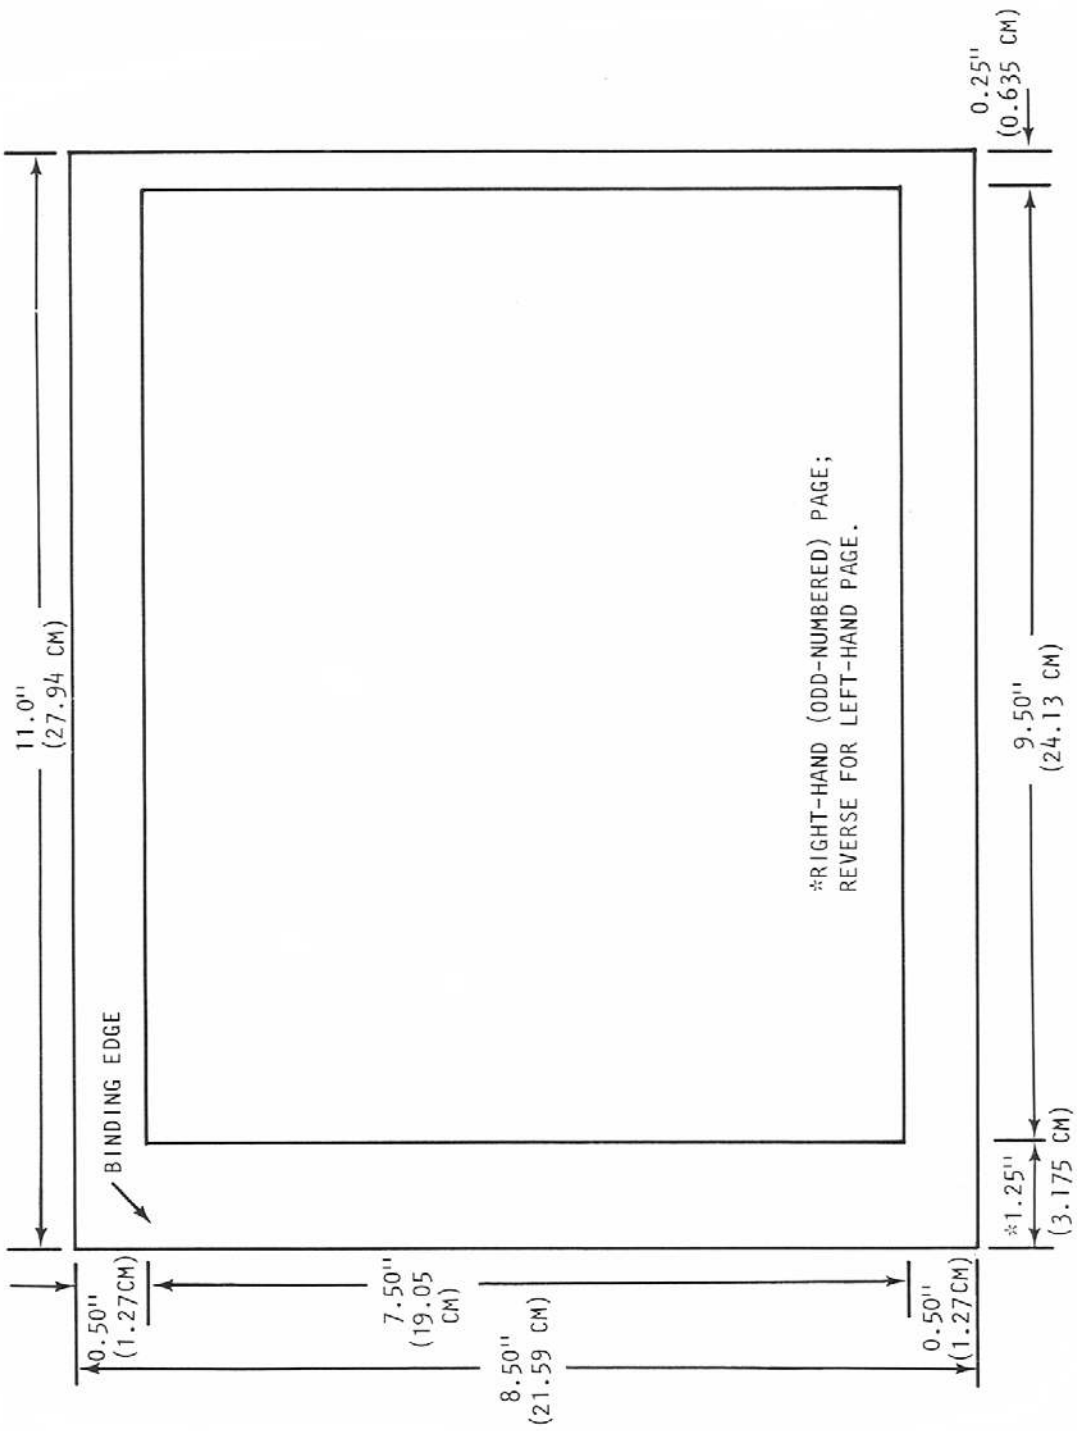

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 1. Page size and format.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

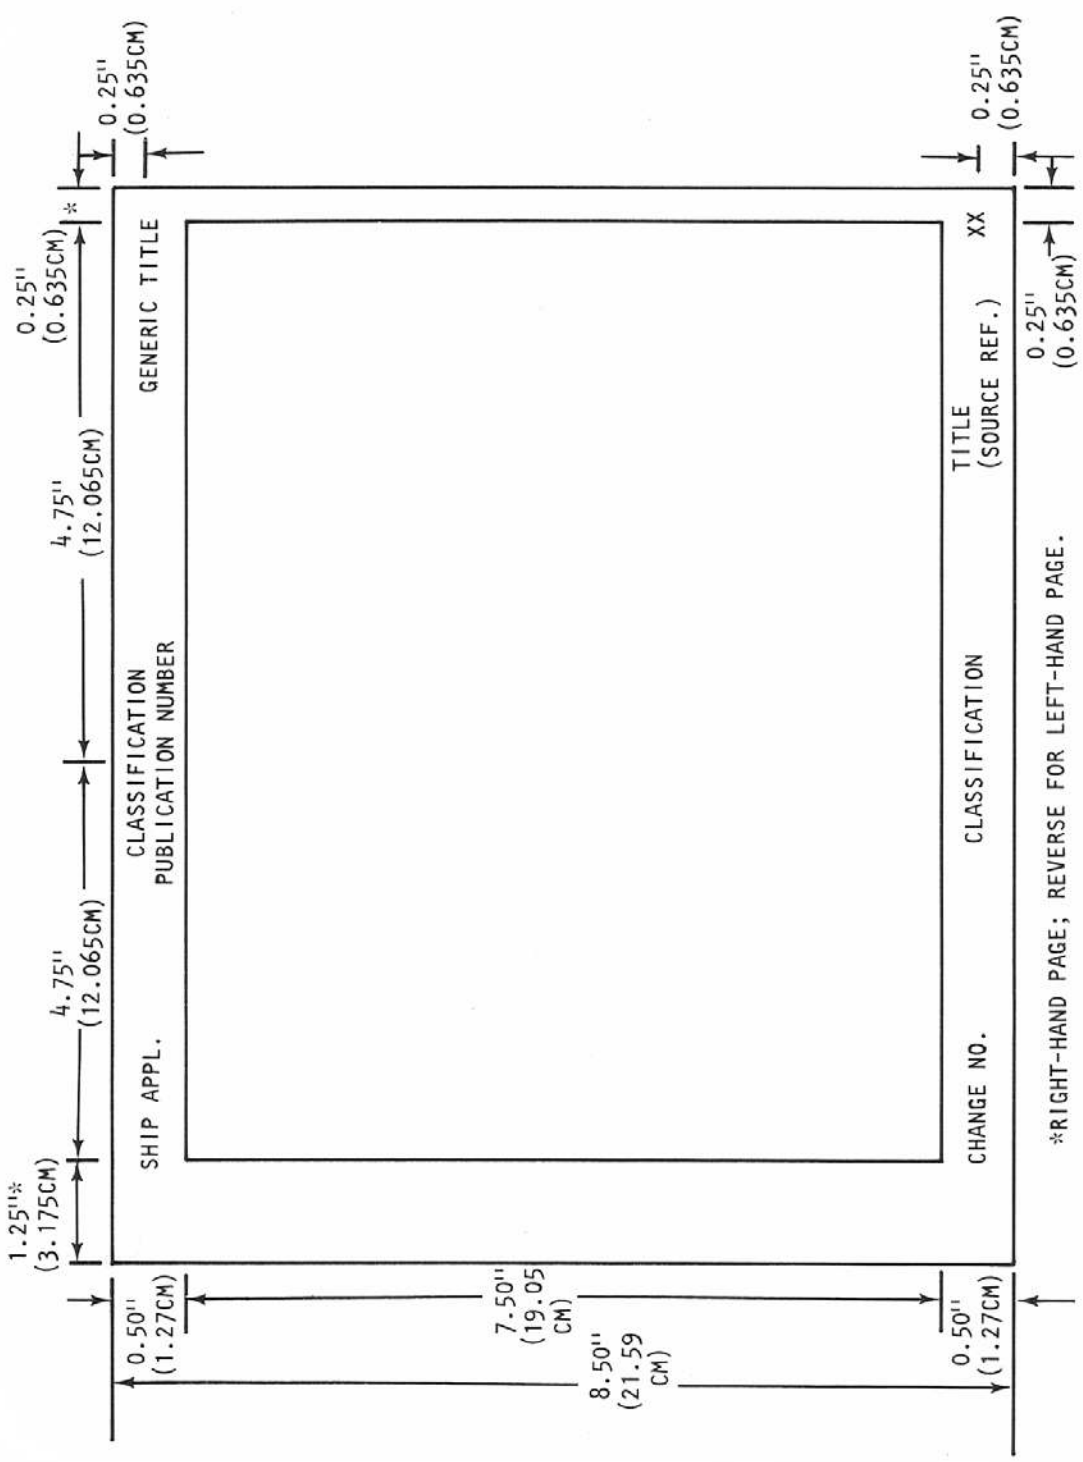

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 2. Single illustration page layout and dimensions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

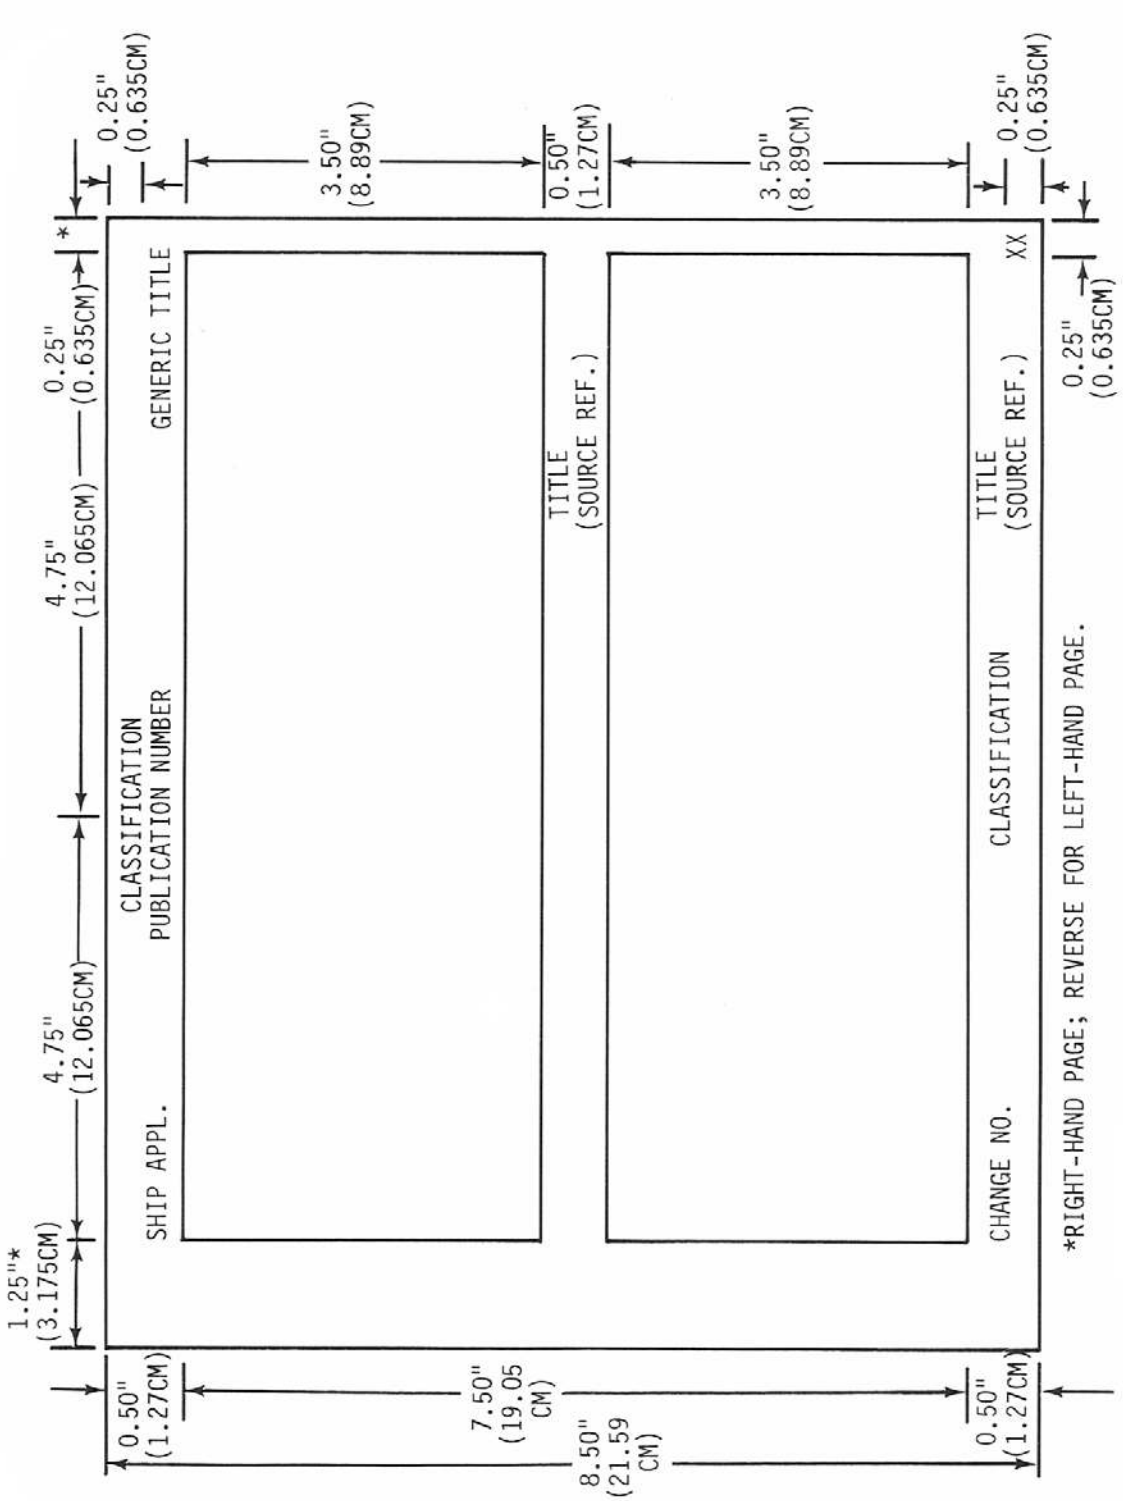

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 3. Double illustration page layout and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

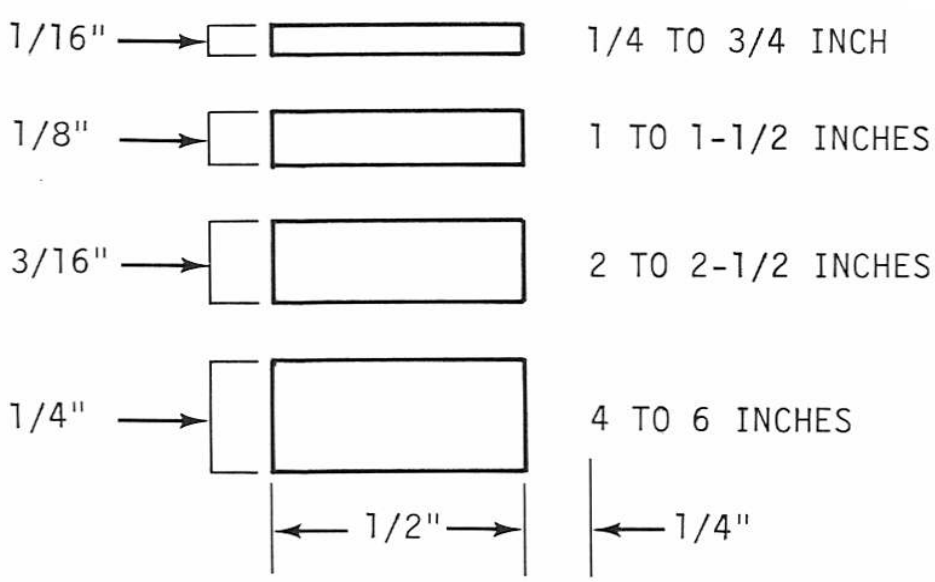


NOTE

PIPE SIZING IS SUBJECT TO VARY, AS IT IS DEVELOPED FROM THE PIPE SIZES THAT ARE INDICATED ON THE SYSTEM DIAGRAM BEING USED.

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 4. Recommended pipe size scale.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

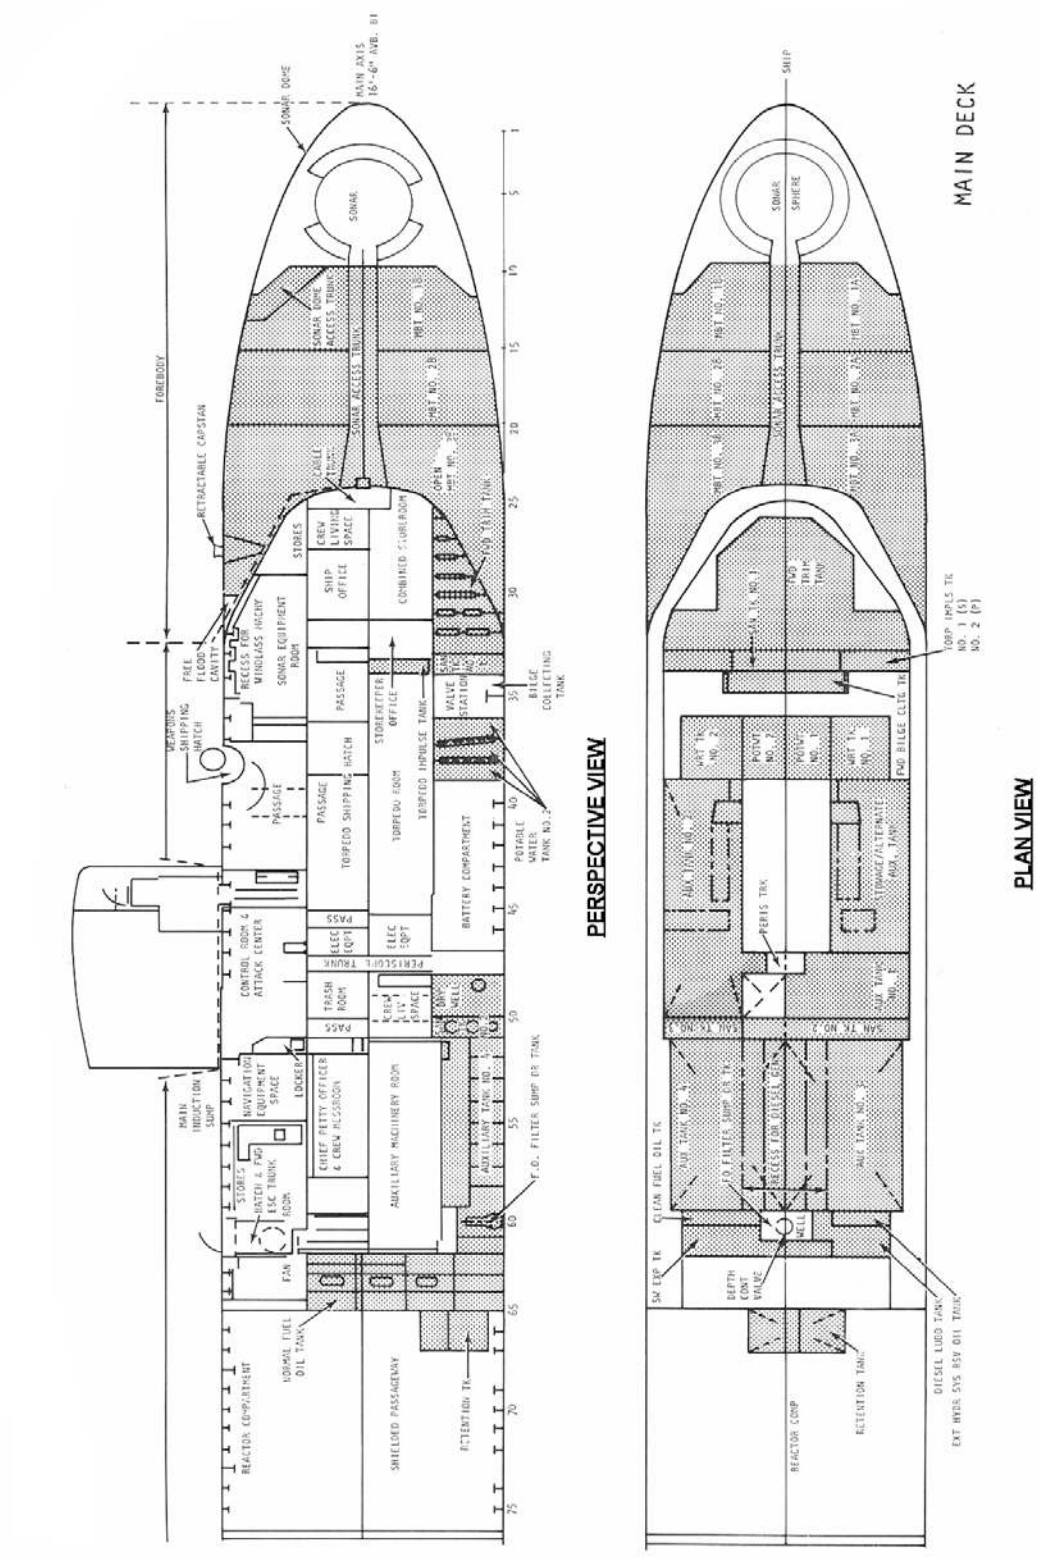

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 5. Perspective and plan views (sample).


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

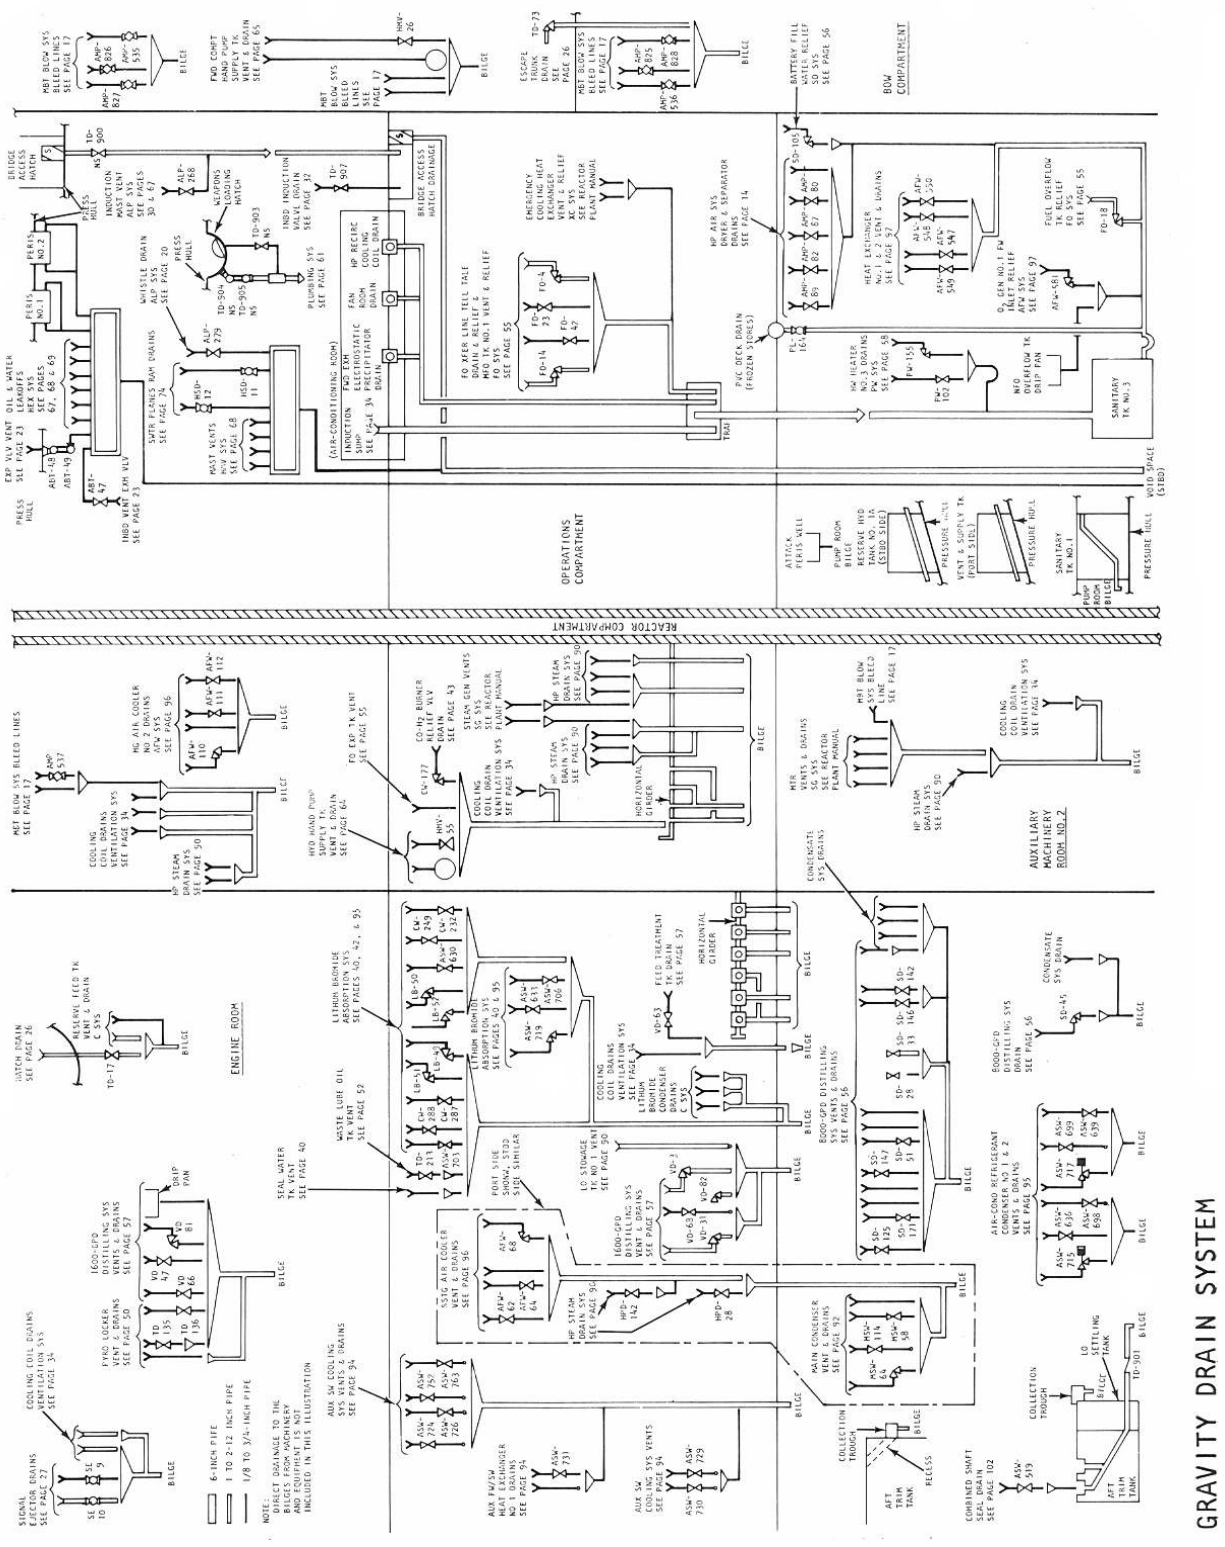

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 6. Functional schematic diagram (sample).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

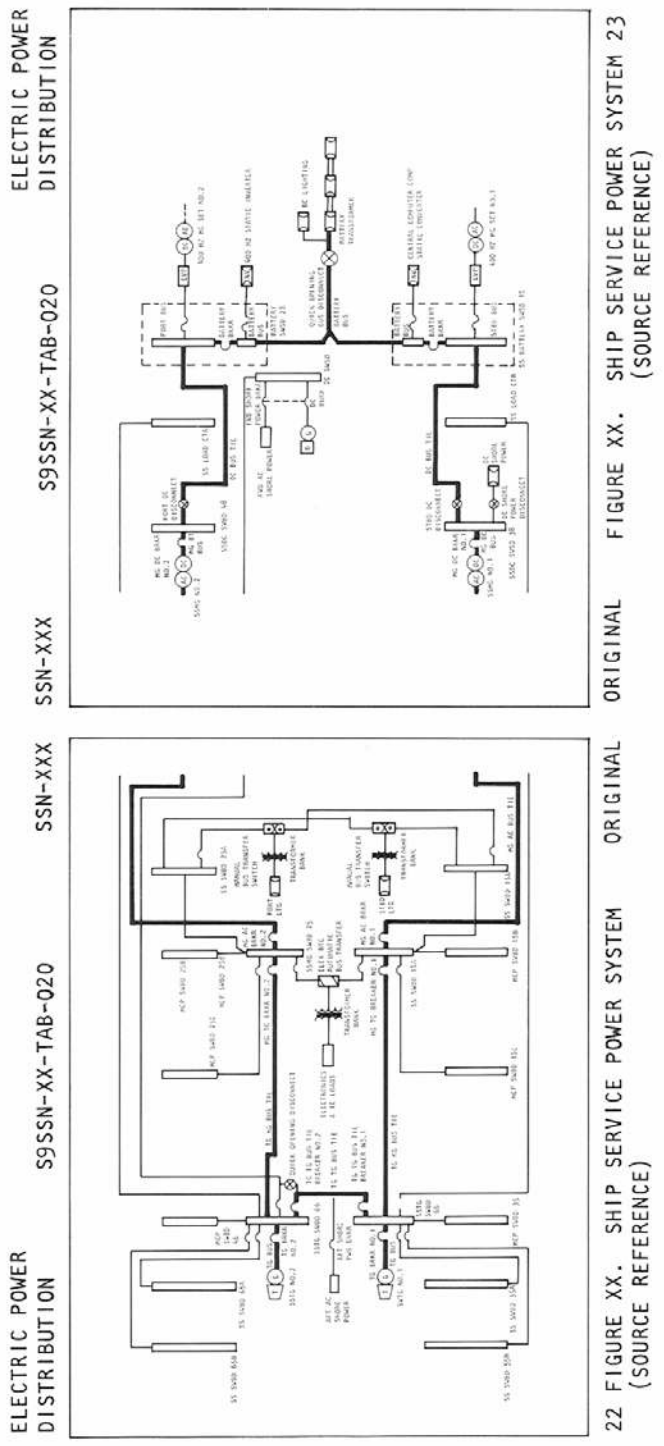

NOTE: Sample arrangement only. Size and legibility requirements do not necessarily conform to minimum specification requirements.

FIGURE 7. Functional schematic diagram, 2-page spread (sample).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy – SH

Review activity:
Navy – EC

Preparing activity:
Navy – SH
(Project TMSS-2017-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:22Z
Check the source to verify that this is the current version before use.