INCH-POUND
MIL-M-24784/17(SH)
6 September 1994
SUPERSEDING
MIL-M-15071H(NAVY)
17 July 1991

ASSOCIATED DETAIL SPECIFICATION

MANUAL, HULL MECHANICAL AND ELECTRICAL (HM&E) SYSTEMS AND ELECTRONIC AND INTERIOR COMMUNICATION (IC) SYSTEMS REQUIREMENTS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification sets forth content requirements for the preparation of technical manuals covering the installation, operation, maintenance, and parts support (without services of manufacturer's representatives) of hull, mechanical and electrical (HM&E) systems, and electronic and interior communications (IC) systems of military or commercial design (see 6.5.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, SEA 03R42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N6946 AREA TMSS
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-M-24784 - Manual, Technical: General Acquisition and Development Requirements.
MIL-M-24784/1 - Manual, Technical Change Package Requirements.
MIL-M-24784/2 - Manual, Technical Revision Requirements.
MIL-M-24784/4 - Manual, Commercial Off-The-Shelf (COTS) Equipment Requirements.
MIL-M-24784/7 - Manual, Technical Repair Standard (TRS) Requirements for HM&E Equipment.
MIL-M-24784/8 - Manual, Technical Repair Standard (TRS) Requirements for Electronic Equipment.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF DEFENSE (DoD)

DoD 5200.1-R - Information Security Program Regulation.
DoD 5220.22-M - Industrial Security Manual for Safeguarding Classified Information.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Y14.15 - Electrical and Electronics Diagram (Including Supplements Y14.15a and Y14.15b).

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS (IEEE)

IEEE Std 200-75 - Reference Designations for Electrical and Electronics Parts and Equipments.

(Application for copies should be addressed to the Institute of Electrical and Electronics Engineers, Inc., 345 East 47th Street, New York, NY 10017 or from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications), the text of this specification shall take precedence. When a generic requirement is in conflict with a unique requirement from the governing associated detail specification, the unique requirement shall take precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Security classifications. The overall classification assigned to a technical manual shall agree with the highest classification assigned to any portion within and shall be placed conspicuously at the top and bottom of the Cover/Title page or abbreviated title. Security classification markings shall be in accordance with DoD 5220.22-M and 5200.1-R and shall be placed in accordance with DoD 5220.22-M and 5200.1-R. The security markings shall be the same as for other title pages.

3.2 Deliverable products and data items. The deliverable products and data items shall be specified in the Contract Data Requirements List (CDRL) and shall conform to the requirements specified in MIL-M-24784, and those specified in this section. Data items shall include the following, as applicable:

(a) Outline or book plan.
(b) Review draft copy (RDC).
(c) Preliminary technical manual (PTM).
(d) Final reproducible copy (FRC).
(e) Supplements.
(f) Changes (see 3.2.1).
(g) Revisions (see 3.2.2).
(h) Management data (see 3.2.3).
(i) Cost and pricing data (see MIL-M-24784).

3.2.1 Change packages. When specified (see 6.2), change packages shall be in accordance with MIL-M-24784/1.

3.2.2 Revisions. When specified (see 6.2), revisions shall be in accordance with MIL-M-24784/2.

3.2.3 Management data. Unless otherwise specified (see 6.2), the following quality assurance data items shall be provided in accordance with MIL-M-24784:

(a) Technical Manual Quality Assurance Program Plan.
(b) Validation Plan.
(c) Validation Certification.
(d) Technical Manual Evaluation Records.
(e) Verification Plan.
(f) Technical Manual Verification Incorporation Certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

3.3 Arrangement. Unless otherwise specified, the HM&E, Electronic, or IC system manual shall be arranged in a standardized format (that is, front matter, technical content, appendices, glossaries, indexes and back matter) and appropriately divided by volume, part, chapter and section in accordance with the requirements of MIL-M-24784, Appendix C.

3.4 Format and preparation instructions.

3.4.1 Writing style. Unless otherwise specified, the style of writing, level of writing, readability, and referencing shall be in accordance with the requirements of MIL-M-24784, Appendix B.

3.4.2 Safety precautions. Unless otherwise specified, safety and health warnings, cautions and notes shall be in accordance with the requirements of MIL-M-24784, Appendix D.

3.4.3 Tabular material. Unless otherwise specified, the preparation of tables shall be in accordance with the requirements of MIL-M-24784, Appendix E.

3.4.4 Graphics. Unless otherwise specified, the preparation of illustrations, drawings, diagrams and sketches shall be in accordance with the requirements of MIL-M-24784, Appendix F.

3.4.5 Numbering. Unless otherwise specified, the numbering of paragraphs, procedures, divisions, issues, changes, illustrations, tables, and publications shall be in accordance with the requirements of MIL-M-24784, Appendix G.

3.5 Technical contents for systems manuals.

3.5.1 Specific requirements. The manuals shall provide system and subsystem oriented instructions for operation, maintenance, installation, and test data. Detailed equipment data should be provided by reference to the equipment manuals. However, technical data shall be developed at the equipment level and be included for all equipment system and subsystem and interface components not covered by an equipment technical manual. The contents shall be arranged in chapters according to the following:

Chapter 1 - General Information.
Chapter 2 - Safety precautions.
Chapter 3 - Conditions of readiness.
Chapter 4 - Operation.
Chapter 5 - Functional description.
Chapter 6 - Scheduled maintenance.
Chapter 7 - Fault-isolation.
Chapter 8 - Alignment procedures.
Chapter 9 - Installation data.

3.5.2 Chapter 1, General Information. Chapter 1 shall describe the system in general physical and functional terms.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the currentversion before use.

3.5.2.1 Introduction. The introduction shall define the system and its relationship with other systems. The mission of the system shall be stated. The text shall be supported by a diagram (see MIL-M-24784) showing the interrelationships of the system equipments (see figure 17-1). The major functional relationship and inputs and outputs to related systems shall be indicated.

3.5.2.2 Physical arrangement. System areas and compartments shall be described and the system equipment and units (see 6.5.4) contained in the areas shall be listed. The physical arrangement description shall be supported by the following illustrations:

(a) An inboard profile drawing of the ship or stations showing compartment locations and identifying topside equipment and equipment units comprising the system (see figure 17-2).
(b) Separate illustrations of each compartment and area, identifying the listed system equipment (see figure 17-3). Other equipment, which is installed in the subject system compartments and areas, need not be listed in the text or called out in the illustrations if they do not directly affect the operation or maintenance of the subject system.

3.5.2.3 System equipment. Each of the equipments comprising the system shall be identified and described. Descriptions of operator-attended equipment shall include general statements as to the nature and purpose of units and indicators. The text shall be supported by illustrations. All equipment shall be shown, whenever possible, in relative-scale proportion. An equipment may be separately illustrated with significant features called out, if such details are necessary for proper support of the text.

3.5.2.4 Associated system equipment. When required, descriptions and illustrations of associated system equipment shall be limited to the major units thereof. The descriptions shall be more condensed than those of subject system equipment; otherwise, the same requirements are applicable. In the descriptions, emphasis shall be placed on those associated systems equipments that constitute operational or functional interfaces with the subject system. Such units shall be included in the system illustrations.

3.5.2.5 Reference data. Reference data shall include a list of the equipment comprising the system, and its official designations. A list of common names and abbreviated or informal nomenclature, and system characteristics together with a list of referenced publications shall be included as follows:

(a) Capabilities. A summary of system capabilities shall be provided. The summary shall include data such as gallons per minute, transfers per hour, boom capacity, rated ranges, resolution, accuracy, data handling capability, number of channels, and so forth. Such data shall be presented in tabular form.
(b) Reference publications. A list of the manuals that pertain to system and system equipments, and other documents of interest, such as training manuals and manuals for associated systems equipment shall be included. The list of publications shall include the title and publication number of the referenced publications.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:28Z
Check the source to verify that this is the currentversion before use.

(c) Tools and test equipment. A list of all special tools and test equipment for system-level maintenance shall be included. Special tools are defined as those tools not listed in the Federal Supply Catalog. An illustration and description of special items required shall be provided for identification. Information shall be presented in tabular form. For each item the description or table shall include:

(1) The official name or nomenclature.
(2) Identifying number.
(3) A brief description of the use of the item with a reference to the procedures requiring its use.

3.5.2.6 User's comments procedure. A brief instruction to the manual user shall specify that comments or recommendations concerning the manual are to be forwarded for consideration (see MIL-M-24784).

3.5.3 Chapter 2, Safety precautions. Chapter 2 shall describe the hazards (see MIL-M-24784) associated with system operation and maintenance. To permit wide and unrestricted use on board ship, Chapter 2 shall contain only unclassified information.

3.5.3.1 Introduction. This description shall orient system supervisory personnel, and shall include the following:

(a) Purpose, scope, and organization of the system safety instructions.
(b) Basic safety concepts.
(c) Basic responsibilities for safety.

3.5.3.2 Electromagnetic radiation hazards and precautions. If applicable, describe the radiation hazards to topside personnel and the precautions to be taken. The hazards of radiation to flammable or explosive materials also shall be described. The description shall include discussions of the following:

(a) Locations of topside and in board radiation hazardous areas.
(b) Minimum safe distances on the axis of beam radiation.
(c) Precautions to be taken when entering areas of radiation hazard (such as the wearing of copper-screen goggles).
(d) The effect of radiation on flammable or explosive material such as induction of rf currents in metals, sparking, and the consequent possibility of igniting flammables or detonating explosives. The text shall be supported by one or more illustrations identifying the areas of radiation hazards and the location of antennas, and so forth.

3.5.3.3 Hazards to divers. When applicable, the description of hazards to divers shall include but shall not necessarily be limited to the following:

(a) The nature and intensity of sound energy in water as related to divers.
(b) Precautions to be taken when working near operating equipment.
(c) Illustrations identifying the hazardous areas and locations of sonar domes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.3.4 System hazards and precautions. Descriptions of system hazards and precautions shall be included, addressed to system personnel and referenced to particular system equipments. The descriptions shall be organized to be consistent with the operation of the system. The descriptions shall supplement and extend equipment safety instructions to the system level, by warning of potential hazards that can be caused during operation or maintenance.

3.4.3.4.1 Operational safety summary. A summary shall be included which emphasizes the proper use of equipment controls, describes the hazards to operators, or as applicable, the hazards to persons in areas remote from the operation, and recommends precautions. An emergency operational routine shall be included which emphasizes the controls that permit immediate braking or de-energizing of the system.

3.5.3.4.2 Maintenance safety summary. A maintenance safety summary shall emphasize the proper use of controls, describe the hazards to maintenance personnel, potential damage to the equipment, and recommend precautions.

3.5.3.4.3 Hazardous components. Identify and briefly describe the hazardous components including radioactive devices and elements used with the system and summarize the general handling precautions for such components. The description of a hazardous component shall include brief statements as to the purpose, manner of functioning, nature of built-in safety devices, and nature of the hazardous element; it shall also indicate the relative sensitivity of the component to mechanical shock, vibration, electromagnetic and radioactive radiation, and electrostatic charges.

3.5.4 Chapter 3, Conditions of readiness. This chapter shall be provided for guidance purposes and shall represent engineering considerations. Chapter 3 shall list conditions of readiness requirements prior to the operation of the system. Activities or conditions within compartments or areas outside the system shall be described as necessary. When it is impractical or illogical to separate the conditions of readiness information from operational information, request shall be made with justification, to combine the requirements of Chapter 3 with the requirements of Chapter 4 (see 3.5.5).

3.5.4.1 Conditions coverage. An orientation of system personnel shall be included. The condition of readiness shall be included as follows:

(a) Watch condition.
(b) General quarters condition.
(c) Emergency condition.

Coverage shall include but not be limited to the following:

(a) A block diagram showing signal paths of the conditions of readiness (see figure 17-4).
(b) Block diagrams and descriptions of interior communications links between compartments and areas, including sound-powered telephone circuits, announcing systems, and closed-circuit television.
(c) Presumptions relative to system status at specified times. (For example, from watch condition to general quarters condition, or from general quarters condition to emergency condition).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.4.1.1 Watch condition. The condition of all systems equipment and the personnel situation (how many of what class or type of men to be stationed where) for watch condition shall be described. The operating console and panel positions shall be illustrated.

3.5.4.1.2 General quarters condition. The condition of all systems equipment and personnel situation shall be described for general quarters condition. The operating console and panel positions shall be illustrated.

3.5.4.1.3 Emergency condition. The condition of all systems equipment and the personnel situation for emergency condition shall be described. The operating console and panel positions shall be illustrated.

3.5.5 Chapter 4, Operations. Chapter 4 shall describe system operating situations, modes, and procedures. The descriptions shall be detailed to the level required for an understanding of the operational interfaces of the system equipments and associated systems. Illustrations shall be included when necessary for clarity (see figure 17-5). The various operating modes shall first be described to acquaint the operator with all equipment combinations that can be employed to effect a given mode of operation.

3.5.5.1 Preoperational conditions and setup. Specific preoperational conditions presumed to be in effect prior to system operation shall be established. A system readiness checkoff list of significant switch positions and indicator status shall be tabulated. For indicators such as dials, where a band of readings are possible, upper and lower limits shall be delineated. The initial conditions of associated system equipment that directly affect system operation shall be treated in a similar manner.

3.5.5.2 Operating modes. The primary operating mode shall be discussed in detail, and alternate modes shall be treated as modifications of the primary mode. Operating procedures common to all modes shall be detailed under the primary mode and referred to under the alternate modes, with such modifications of procedure as may be necessary. Each mode shall be described in the logical sequence of major phases, events, options, supervisory commands and responsive actions, and the following:

(a) Only those equipment operational controls and indicators having system significance shall be explained in the description. When controls must be actuated and indicators observed in a sequence to achieve system operation, the descriptions will cite each control and indicator with a number to indicate the position in the sequence.
(b) Emphasis shall be placed, by the use of warnings on the safe operation of controls, which, if operated improperly, could result in hazards to personnel or damage to the equipment. Each control shall be followed by a brief description of its effects (equipment actuation or display indication, or both) at the operator station and at remote stations. The primary mode description shall be supported by both general and detailed illustrations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

(c) Operational phases which involve operator judgement shall be illustrated by operational logic diagrams. The diagrams shall indicate the conditions that must be favorable prior to an operator action, or if unfavorable, indicate the alternate action. Illustrations showing dials, gauges, status lights, and so forth, which indicate the favorable or unfavorable conditions shall be included. Special procedures to be followed when an equipment failure may be bypassed (as separate from emergency procedures) shall also be described.

3.5.5.2.1 Normal operation. The duties of system operators shall be described in terms of general responsibility and specific step-by-step procedures (see MIL-M-24784) for operating the system in all of the primary modes. Descriptive words (such as switch, button, dial, or indicator) may be added to clarify the type of control involved, for example: "Press ACCESS button and observe channel spot." All system controls and indicators provided for the use of operators shall be covered. Controls and indicators provided only for maintenance and nonsystem application shall not be called out.

3.5.5.2.2 Emergency operation. Step-by-step procedures shall be provided for emergency operation of the system. If specially designated controls have been provided for emergencies, a short statement shall be included describing how they modify or otherwise affect normal system operation. Emergency procedures shall be supported by illustrations.

3.5.5.2.3 Special operation. Special operations such as test checkout, training, or evaluation exercises shall be described. Illustration support shall include block diagrams and pictorial diagrams.

3.5.5.3 Standard log form (model set). Standard log forms (see MIL-M-24784) and selected data shall be developed and prepared and included in this chapter for all ship systems requiring monitoring of operational functions such as chemicals, data, temperatures, and so forth, required for determining safe and reliable ship's operations. Such systems shall be, but not limited to the following:

(a) Propulsion.
(b) Boiler.
(c) Electrical.
(d) Battery.
(e) Distilling.
(f) Fuel and fueling.
(g) Refrigeration.
(h) Environmental.

3.5.5.3.1 Waiver of requirement. When it is deemed necessary that the development of such a form would be of no value to the Government for the equipment being covered, a waiver (with justification and rationale) for standard log form requirements shall be requested at least 3 months prior to submittal of the review draft copy (RDC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.5.3.2 Criteria. The "model" standardized log form shall serve as an operating log that shall be a guide to all ships of all classes. It is not intended that this model will in any way inhibit an individual ship from accommodating its specific needs through the addition or deletion of readings as deemed necessary on a case basis. The basic criteria to be utilized in developing the model shall be:

(a) Analyzing the various parameters associated with monitoring the performance of the equipment to ascertain those that provide trend determinant information.
(b) Synthesizing the results of the above analysis to ensure that only "key" (that is, necessary) parameters are included; the goal being to keep to an absolute minimum the total number of log readings required in running the plant.
(c) Arranging the order of monitoring on the appropriate log forms in such a manner that the log keeper and the reviewing officer can quickly tell when problems, either short-term or long-term in nature, are beginning to develop (that is, by function as opposed to order of physical arrangement).
(d) Duplicate readings shall be eliminated where feasible (that is, where the parameter is generally associated with a single function and where duplicated readings are not normally compared with one another).

3.5.5.3.3 Training summary. A training summary for use of the form shall also be included in Chapter 4. It shall indicate how to use the chart and an explanation of the significance of the monitoring points and readings.

3.5.5.3.4 Request for number. The contractor shall advise the Government of the requirement for log forms. The Government shall arrange for a forms stock number, and printing and stocking of the log form.

3.5.6 Chapter 5, Functional description. Chapter 5 shall describe how the components or equipments comprising the system jointly perform major operations and functions, and how associated systems contribute to the performance of these major functions. Equipment or associated system interfaces shall be described only as necessary to identify the sources or destinations of system inputs and outputs (see figure 17-6). Descriptions shall not repeat the functional description provided in the equipment manuals.

3.5.6.1 Method of presentation. The presentation shall first define how the system major functions meet the purpose of the system as described in 3.5.2.1. Each major function (see 6.5.3) shall then be discussed separately at progressively increasing levels of detail. The description of the entire system shall be supported by a basic block diagram of the system (see figure 17-7). Where information can be presented better pictorially than by text, additional diagrams and other illustrations shall be used. Reference may be made to diagrams appearing in Chapter 7.

3.5.6.2 Introduction. The introduction shall describe the general approach that is used in the functional description. The introduction shall also describe briefly the interrelationship between the system and associated systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.6.3 System function directory. A system function directory shall tabulate operation control functions and the signal data described in the detailed level of functional analysis (see 3.5.6.6). The tabulation shall include the following information, as applicable:

(a) Official name of the function, colloquial name, and symbol.
(b) Type of control or signal (ac frequency and voltage, dc polarity and voltage, hydraulic pressure, mechanical motion, synchro, and so forth).
(c) The origin and termination of the control or signal.
(d) Identify equipments (relay transmitters, coordinate converters, distribution boxes, switches, and the like) between the origin and termination of the output control or signal.
(e) Figure numbers of illustrations on which the function is illustrated, including the fault-isolation diagrams in Chapter 7.

3.5.6.4 Functional description.

3.5.6.5 First level of functional description. The first level of the description shall be confined to data such as origin of the major functions at an equipment control or sensor; transmission of the signal via intermediate equipment such as switchboards, relay transmitters, coordinate converters, and distribution boxes; and presentation of the function at terminal equipment. Control functions essential to the development of a signal shall be introduced and briefly described in their relationship to the signal. The description shall be supported by a block diagram (see figure 17-8). The diagrams for electrical and mechanical systems may be illustrated as shown (see figure 17-9). Functions involving computations may be explained in mathematical terms, but at a level no higher than high school mathematics. The second level of analysis shall be supported by one or more diagrams.

3.5.6.6 Detailed (second) level of functional description. The detailed-level description shall explain the system major functions in terms directly related to the diagrams in Chapter 7. Data and control functions shall be described down to the level of an equipment or an equipment group. Functional descriptions of important parts of electrical or mechanical systems may be supported by illustrations similar to figure 17-10.

3.5.7 Chapter 6, Scheduled maintenance. Chapter 6 shall contain all system schedule test procedures, together with necessary explanations and illustrations. It is intended that the engineering effort required to develop preventive maintenance data be expended only once and that the data, where applicable be used both in this chapter and in Logistic Support Analysis (LSA) or Maintenance Requirements Cards (MRC) where one or more of the latter three data items are required by the contract. The preparation of this chapter of the manual should therefore be delayed until completion of the LSA, or MRC; submissions of the manual draft copy for review should be marked "TO BE SUPPLIED UPON COMPLETION OF LSA". When the approved LSA, or MRC data is available, it shall be referenced in the manual. When included in the manual, such LSA, or MRC data shall be integrated with other technical data required by this specification to be in this chapter. These procedures shall be correlated with the installation checkout requirements of 3.5.10.6, so that any maintenance or performance test procedure also required for checkout

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

may be properly referenced from Chapter 9, Installation data. The Installation Standards Summary Sheet (see 3.5.10.9.2) shall also include space for any maintenance or performance test result that should be recorded by the installer. The recorded information shall provide a reference to the Navy technician when troubleshooting or when needed for installation acceptance certification. Chapter 6 shall comprise the following:

(a) Introduction.
(b) Scheduled maintenance action index.
(c) Scheduled test procedures.

3.5.7.1 Introduction. The introduction shall be an explanation of the purpose, scope, and arrangement of the scheduled maintenance material. When a preventive maintenance procedure is critical to the operation of the system and the schedule for servicing is absolute (not recommended), this information shall be conspicuously written as a CAUTION. The following statement shall be included:

"The scheduled maintenance instructions in this manual are intended to duplicate those furnished in the Planned Maintenance System (PMS). In case of conflicts, the PMS documentation takes precedence. Such conflicts should be reported immediately on the user comment sheet in accordance with the maintenance procedures for this manual."

3.5.7.2 Scheduled maintenance action index. This index shall include all scheduled performance procedures. The index shall be tests and preventive maintenance tabulated as follows:

(a) Column 1, Periodicity. This column shall contain an alphanumeric list of all maintenance actions contained in the chapter. The following periodicity symbols, as appropriate, shall be used in the order of increasing periodicity as listed below:

INTERVAL	SYMBOLS
Daily	D
Weekly	W
Monthly	M
Quarterly (3 months)	Q
Semiannually (6 months)	S
Annually	A
Overhaul cycle	C
As specified (explain circumstances)	R1/

1/ An R periodicity shall be preceded by a recommended calendar periodicity (for example, DR, WR, MR, and so forth).

(b) Column 2, Maintenance action. This column shall list the maintenance action which corresponds to the periodicity number in column 1.
(c) Column 3, Reference. This column shall state the paragraph number that contains the procedure listed in column 2.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.7.3 Scheduled test procedures. Include the detailed procedures for setting up and performing complete system tests. Each procedure shall be numbered and titled to clearly define the test action and the output to be tested.

3.5.7.3.1 Scheduled performance tests. These tests shall contain step-by-step procedures necessary to verify that the equipment is operating within standards in all modes of operation and shall contain the following:

(a) Safety precautions.
(b) A list of tools and test equipment identified by type, manufacturer, and model number.
(c) The title of the test to be performed.
(d) The minimum rating of the technician expected to perform the task.
(e) Preliminary setup data required to perform the test.
(f) Detailed procedures for accomplishing the test. Procedures requiring lengthy and identical setup data may be presented in detail in one procedure and referenced in succeeding procedures.
(g) Values or conditions, with tolerances, indicative of normal operation.
(h) References to troubleshooting or corrective actions to be used if the test values are not within tolerances.
(i) Illustrations to support the test.

3.5.8 Chapter 7, Fault-isolation. Chapter 7 shall contain fault-isolation procedures, illustrations, and an explanation of the use of the information presented. The major objective of the system fault-isolation procedures contained in Chapter 7 shall be described. In addition, this shall contain a brief description of each type of maintenance diagram. A fault directory shall be included which relates fault symptoms found during operation to the fault-isolation procedures. Fault-isolation procedures, fault logic diagrams, control function diagrams, and data function diagrams shall be included as follows:

(a) Operation-based symptom fault directory.
(b) Fault-isolation procedures.
(c) System fault logic and troubleshooting maintenance dependency matrix diagrams.
(d) System control function diagrams.
(e) System data function diagrams.

[When a separate depot-level manual is required (see 6.2), it shall include the information required by MIL-M-24784/7 (HM&E) or MIL-M-24784/8 Electronics/IC, as applicable.]

3.5.8.1 Operation-based symptom fault directory. The directory shall relate system faults observed during operation described in Chapter 4 to fault-isolation diagrams. The directory shall be presented in tabular form by operational modes (see figure 17-11). The tables shall include references to system fault-isolation diagrams, and where applicable, directly to equipment troubleshooting diagrams. Table content shall include, as applicable, the following information:

(a) Table headings. Table headings shall be identified by the operational mode to which the table relates.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

(b) Column headings. The fault directory shall contain the following columns.

(1) Column 1, Operating procedure step. This column shall list the step of the operation procedure in Chapter 4 for which a fault symptom can be observed. (For example, if step 1 is an action step "set XYZ switch to ON" with no operational response, step 1 would not appear in the column. However, if step 1 stated "Set XYZ switch to ON and check to see that XYZ lamp lights," then step 1 would be included in the column.)
(2) Column 2, Functional description. This column shall include the reference to the paragraph number of the functional description in Chapter 5. In addition, when an operation can be identified with an output, this column shall also contain the name or symbol of the output.
(3) Column 3, Fault-isolation procedure. This column shall reference by paragraph number the fault-isolation procedure.
(4) Column 4, Alignment procedure. This column shall reference by paragraph number the alignment procedure in Chapter 8.
(5) Column 5, Fault-isolation diagram. This column shall reference the fault-isolation diagram by figure and sheet number.
(6) Column 6, Equipment document. This column shall reference the equipment technical manual when the fault can be isolated to the specific equipment causing the fault.

3.5.8.2 Fault-isolation procedures. Procedures shall be included for isolation of a trouble to a single equipment or functional area of an equipment. The procedures shall provide for the analysis of switching combinations and observable indications (dials, gauge lamps, and meters). The use of any required test equipment shall be described. The procedures shall support the system fault-logic, control function, and data function diagrams (see MIL-M-24784). The supporting diagrams shall be referenced by figure number. Prerequisite control settings and conditions shall precede each procedure.

3.5.8.3 System data function diagrams. System data function diagrams shall show in detail the system information needed to isolate faults within signal or data flow paths. Data function diagrams shall include tolerance values and shall contain references to equipment publications where necessary. All inputs required to develop the output shall be shown. The data function diagrams shall be constructed in accordance with the following:

(a) Titles of diagrams shall correspond to the signal flow described.
(b) Show all test points necessary to isolate the trouble to the lowest level of hardware block (for example, subassembly). Include test parameters required to define satisfactory operation. Where signal flow diagrams depict signal flow in more than one mode of operation, that data shall be presented on the apron for all modes. Apron notes shall also include test data for test equipment setup. All inputs and outputs shall have signal description information.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

(c) References shall be made to the functional description, troubleshooting procedures, corrective actions, and so forth, as appropriate by paragraph number. Normally these references shall be included with the notes.
(d) The display of more than one function or mode of operation on one diagram shall be allowed only when clarity is not sacrificed and the functions are relatively simple.
(e) Screwdriver adjustments, dial adjustments, and adjustable controls shall be shown.
(f) All built-in controls and monitoring devices shall be shown. Do not show external test equipment, unless it is a permanent part of the equipment.
(g) Hull grounds, chassis grounds, signal grounds, and power grounds shall be shown.
(h) All leads of motors, generators, synchros, and so forth, shall be identified.
(i) All relay coils that are energized by the signal shall be shown.
(j) All relay contacts and relay terminals in the flow path shall be shown and identified. All relay contacts shall be depicted in operational mode. References to control diagrams on which the relay coils appear shall be shown adjacent to the relay contacts.
(k) Signal paths shall be identified by weighted lines and arrowheads.

3.5.9 Chapter 8, Alignment procedures. Chapter 8 shall present the corrective adjustment procedures and support information necessary to restore electrical and mechanical alignment between the various system equipments. All values and tolerances shall be included. The alignment shall be cross-referenced to respective fault-isolation procedures and diagrams in Chapter 7. Alignment procedures shall include references to equipment publications where further procedures are required at the equipment level. The alignment procedures shall be presented in step-by-step form.

3.5.10 Chapter 9, Installation data. Chapter 9 shall present installation drawings and information not contained in the equipment technical manual necessary to install and checkout the system.

(a) Summary of all utilities required by the system, such as air, water, power, steam, freon, and so forth.
(b) System interconnection diagrams.
(c) Cable run diagrams (see MIL-M-24784).
(d) System piping diagrams (see MIL-M-24784).
(e) System cable interconnection check.
(f) Active system tests.
(g) System component installation procedures.

3.5.10.1 Utilities list. A utilities list shall be included that presents in tabular form all utilities required, and the quantities of each, in each system, compartment, and area.

3.5.10.2 System interconnection diagrams. System interconnection block diagrams shall be prepared in accordance with ANSI Y14.15 and shall be presented with each equipment or component shown as a block. All cables running between

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

equipments shall be identified by cable number. The number of active and spare leads in each cable shall be included. The illustrations shall also indicate all junction boxes, switchboards, and so forth, into which interconnection cables enter or leave.

3.5.10.3 System cable interconnection check. Cold-wire check procedures shall be provided to verify the proper installation of all system cables. These checks shall be prepared to be conducted with all power off and all equipment completely shut down.

3.5.10.4 Active system tests. All active system test procedures required to verify the proper installation and operation of the system shall be included. Reference may be made to applicable tests and procedures in Chapter 6. Procedures for complete setup, testing, shut down, and data analysis shall also be provided.

3.5.10.5 System component installation procedures. Complete step-by-step instructions shall be provided for installation of system components not covered in any of the equipment manuals for the equipment comprising the system. The following types of supplemental information not provided in the equipment technical manual shall be included:

(a) Instructions required to assemble components.
(b) Instructions required to mount components. Include boring and bracing diagrams and data on shock mounts.
(c) Instructions for making electrical, waveguide, plumbing, and all other interface connections between equipments, components, and other systems.
(d) Servicing procedures, such as initial lubrication and adjustments.
(e) Instructions for bonding and grounding.

3.5.10.5.1 Installation drawings. The following drawings shall be included:

(a) Pictorial diagrams.
(b) Outline and mounting dimension data.
(c) Interconnecting wiring and cabling diagrams.
(d) Primary power distribution.
(e) Piping diagrams.

3.5.10.6 Installation checkout. Step-by-step procedures shall be provided to demonstrate that the system operates correctly and within tolerances. These procedures shall provide for system checkout in three test phases as follows:

(a) Phase 1 - Installation inspection and pre-energizing procedures.
(b) Phase 2 - Turn-on and preliminary tests.
(c) Phase 3 - Installation verification test.

3.5.10.7 Phase 1 - Installation inspection and pre-energizing procedures. Inspection procedures shall be provided in the form of check lists to verify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

(a) That the system and required auxiliary equipments have been installed and that their location and orientation is proper; that all cables, antennas, waveguides, transmission lines, dehydrators, coolant lines, piping, and so forth, have been installed in accordance with plans and specifications; that continuity exists in all interconnections.
(b) That special system test equipment listed in Chapter 1 is on board, operating satisfactorily, and has been calibrated.
(c) That all field changes, mandatory retrofits, or SHIPALTS have been accomplished.
(d) That all rotating devices are free from obstruction.
(e) That there is access to the system components for maintenance.
(f) That all pre-energizing servicing procedures, including lubrication, have been accomplished.
(g) That it is safe to operate the system.

3.5.10.8 Phase 2 - Initial turn-on and preliminary test. Procedures shall be included for energizing the system for the first time. This may be accomplished by reference to the applicable portions of Chapter 4. Step-by-step procedures shall be included for testing electrical, steam, and fluid supply circuits, distribution panels, breakers, and interlocks. Procedures shall be included for testing piping, cables, transmission lines, and waveguides for proper installation, including checks for hanger spacing, torquing of connectors, pressure testing, standing wave ratio, and attenuation checks.

3.5.10.9 Phase 3 - Installation verification test. Complete instructions shall be included for testing the system in all modes of operation. Where applicable, refer to the scheduled performance tests in Chapter 6. Procedures shall cover checking gauges, meters, alarms, and other sensing devices for proper operation and calibration. Tests shall verify that all inputs are in tolerance. Where applicable, include voltage standing wave ratio (VSWR) and insertion loss tests to verify the proper installation of antenna-to-equipment waveguides runs; transducer impedance and source level checks to verify proper installation of transducers, domes, and cables; dynamic and static load tests for hoists, winches, and so forth. Preliminary setup data shall be included in each procedure. When it is required that an alignment be accomplished prior to performing a test, the alignment shall be included or referenced in the procedure.

3.5.10.9.1 Test procedures. Testing procedures shall be presented in a logical order as follows:

(a) Energize the system.
(b) When test results are within the required tolerance, include a reference to the next logical test. When test results are out of tolerance, include a reference to the corrective maintenance or troubleshooting data. Reference shall be made to troubleshooting diagrams except where probable causes of failure can be predicted, in which case reference may be made directly to an alignment or repair procedure.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

3.5.10.9.2 Installation standards summary sheets. The installation standards summary sheet shall provide spaces for recording the results of all installation verification and maintenance standard tests (see figure 17-12). Spaces shall also be provided for recording the results of all maintenance or performance standards tests included in Chapter 6, scheduled maintenance, that are required for reference by the Navy technician when troubleshooting or for Government acceptance certification. Each space shall be identified by the step or paragraph number which provides the instructions for accomplishment. Each space shall contain the respective unit of measurement (for example, db., or V.). When applicable, waveforms shall be included to show the points on the pattern where the measurement is to be taken. In addition, critical installation data shall be included, such as length of transmission line.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Quality control. Unless otherwise specified (see 6.2), the quality conformance inspection, Government inspection, validation, verification, technical manual quality assurance (TMQA) program reviews, technical manual evaluation records and rejection requirements shall be in accordance with MIL-M-24784.

5. PACKAGING

5.1 Packaging requirements. Unless otherwise specified (see 6.2), the packaging and preservation requirements for delivery of book plans, review draft copies, preliminary technical manuals, final reproducible copy, technical manuals, replenishment materials, changes and revisions shall be in accordance with MIL-M-24784.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:28Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The technical manuals prepared to this specification are intended to be used for installation, operation, maintenance, repair, and parts support of HM&E, electronic and IC systems. The technical manual will be used as a training document in the classroom and as a source for on-the-job training.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification (or any TMCR referencing this specification).
(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1, 2.1.2 and 2.2).
(c) Applicable publication number, classification, and distribution statement (see 3.1).
(d) An outline or book plan manual must be specified whenever a technical manual is required for a new equipment or system (see 3.2a).
(e) Double column text must normally be specified. When increased effectiveness of presentation results, a single column format is also acceptable.
(f) A review draft copy (RDC) must always be specified for every new technical manual (see 3.2b). An RDC also must be specified for manual change or revision procurements (see 3.2f and 3.2g), unless changes to the technical manual have been preapproved (TMDER, ECP, and so forth) by the Government.
(g) Specify the number of weeks required for Government review of technical manual deliverables.
(h) Specify a preliminary technical manual when an extended period of use is required prior to Government verification (normally applies to complex equipment and systems only), see 3.2c.
(i) Final reproducible copy (see 3.2d).
(j) Supplements to manuals (see 3.2e) must be specified when:

    (1) Classified information can be confined to the supplement manual such that its basic technical manual will be routed as "unclassified".
    (2) It augments a technical manual to provide for a different model and can be justified as a cost effective method of promulgation.
    (3) It can be justified as a practical method of promulgation.

(k) Changes must be specified only when they pertain to technical manual corrections resulting from a hardware change or modification. They may also be specified if it has been determined that significant omissions of technical data or information has been identified. Do not specify a change to correct minor or editorial corrections. When changes are justified on the above basis, the change package must include the correction of all outstanding temporary or interim changes and may include minor changes (see 3.2f). The change package must be developed in accordance with MIL-M-24784/1.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:28Z
Check the source to verify that this is the currentversion before use.

(l) Whenever the number of change pages is estimated to exceed approximately 25 percent of the total number of pages in the manual, an update revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(m) When the total number of pages requiring change exceed approximately 50 percent of the total number of pages in the manual, a complete revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(n) When quality assurance and management data items are required for effective management, selected items must be specified for delivery (see 3.2.3, 4.2, 6.4 and MIL-M-24784).

(1) TMQA program plan.
(2) Validation plan.
(3) Validation certification.
(4) Evaluation records.
(5) Verification plan.
(6) Verification incorporation certification.

(o) When the system requires a Class B overhaul, a depot level maintenance manual (TRS) is to be acquired in accordance with MIL-M-24784/7 or MIL-M-24784/8, as applicable (see 3.5.7).
(p) When preservation, packing, and marking are other than as specified (see Section 5. PACKAGING).
(q) For classified equipment, attach a DD Form 254 specifying the following:

(1) Security classification.
(2) Downgrading and declassification notification.
(3) Areas requiring security protection.

6.3 Technical manual acquisition. This specification (or a TMCR based on this specification) must be listed on the Contract Data Requirements List (DD Form 1423) in order to acquire the technical manuals described by this specification, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

6.4 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title
3.2.3	DI-M-2194	Manual, Technical; Quality Assurance Program Plan
3.2.3	DI-M-2195	Manual, Technical; Validation Plan

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:28Z
Check the source to verify that this is the currentversion before use.

Reference Paragraph	DID Number	DID Title
3.2.3	DI-M-2196	Manual, Technical; Validation Certification
3.2.3	DI-M-2197	Manual, Technical, Evaluation Record
3.2.3	DI-M-2198	Manual, Technical; Verification Plan
3.2.3	DI-M-2201	Technical Manual Verification Incorporation Certification

The above DID's were those cleared as of the date of this specification. The current issue of DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.5 Definitions. The words or phrases used throughout this specification must be as defined in MIL-M-24784 and the following.

6.5.1 Commercial design. Equipment engineered and manufactured primarily for commercial purposes. For military applications, the acceptability of commercial off-the-shelf (COTS) manuals supporting the equipment or system can be established in accordance with MIL-M-24784/4 or this specification as directed by the Government.

6.5.2 Interim change. The SPAWAR method of promulgating rapid changes to a technical manual. The information required to amend, correct or modify a manual when emergency or urgent changes are necessary and there is insufficient time available to publish a permanent change. Interim changes are subject to replacement by a permanent change. (Interim changes are often referred to as temporary changes.)

6.5.3 Major function. An essential functional operation which is fundamental to operation (as opposed to a circuit) of the equipment (for example, transmit, receive, display, hoist, and so forth).

6.5.4 Unit. A major building block for a set or system, consisting of a collection of basic parts, subassemblies, and assemblies packaged together as a physically independent entity. Refer to IEEE 200-75 for a detailed description.

6.6 Subject term (key word) listing.

Depot-level maintenance
Installation
Intermediate maintenance
Operation
Equipment maintenance
Organizational maintenance

Review activity:
Navy - EC

Preparing activity:
Navy - SH
(Project TMSS-N242-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.


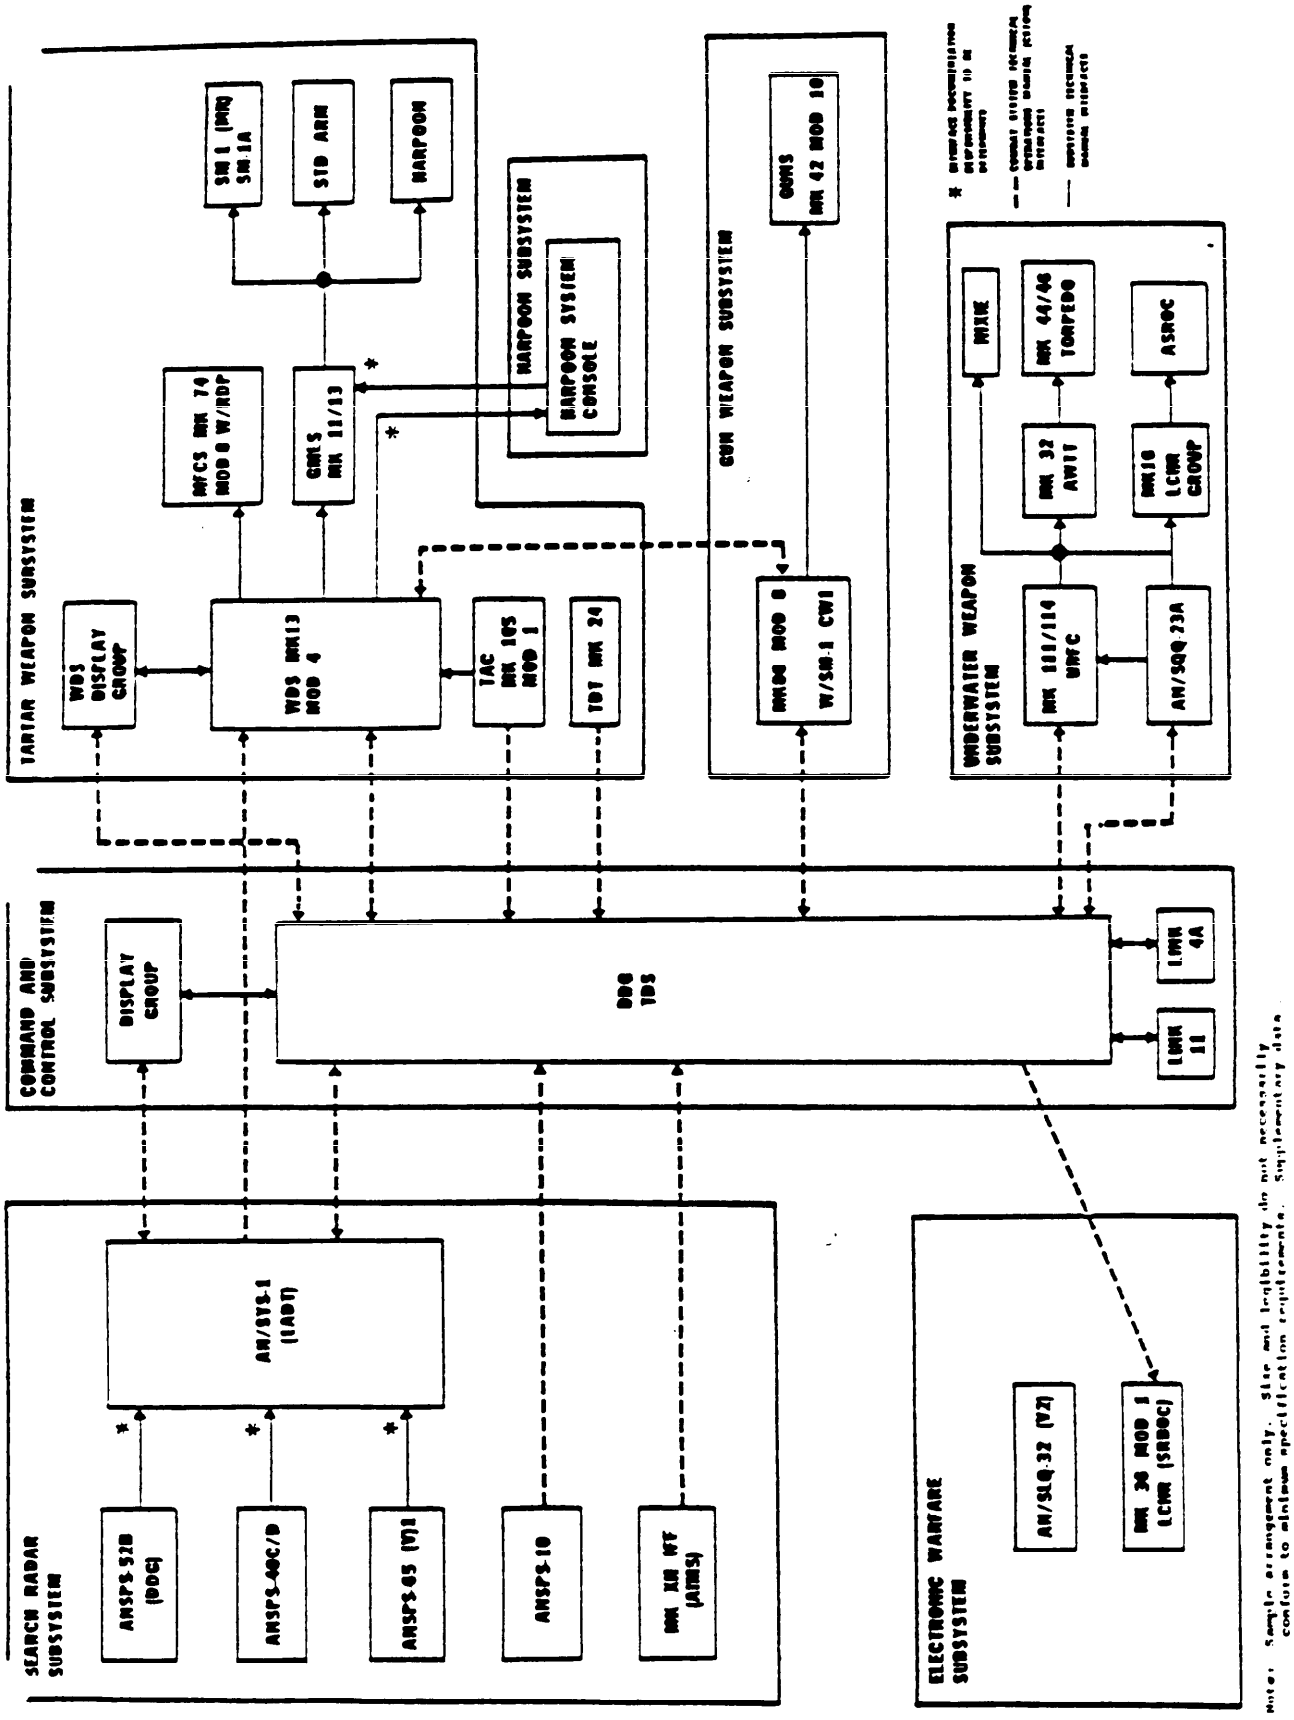


FIGURE 17-1. System block diagram interface documentation.


Source: https://assist.dla.mil -- Downloaded: 202610-20T02:28Z
Check the source to verify that this is the currentversion before use.

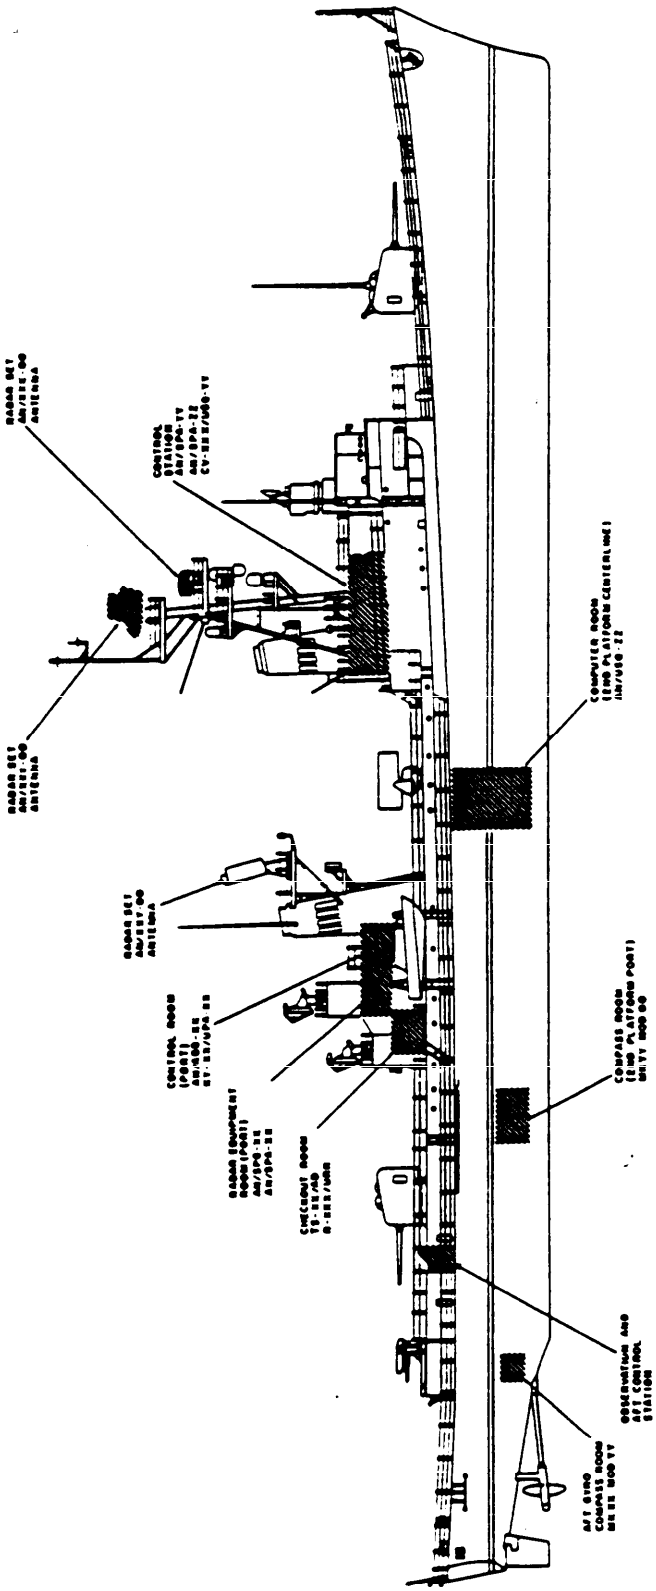

Sample arrangement only. Type size does not conform to minimum specification requirements.

FIGURE 17-2. System compartments.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

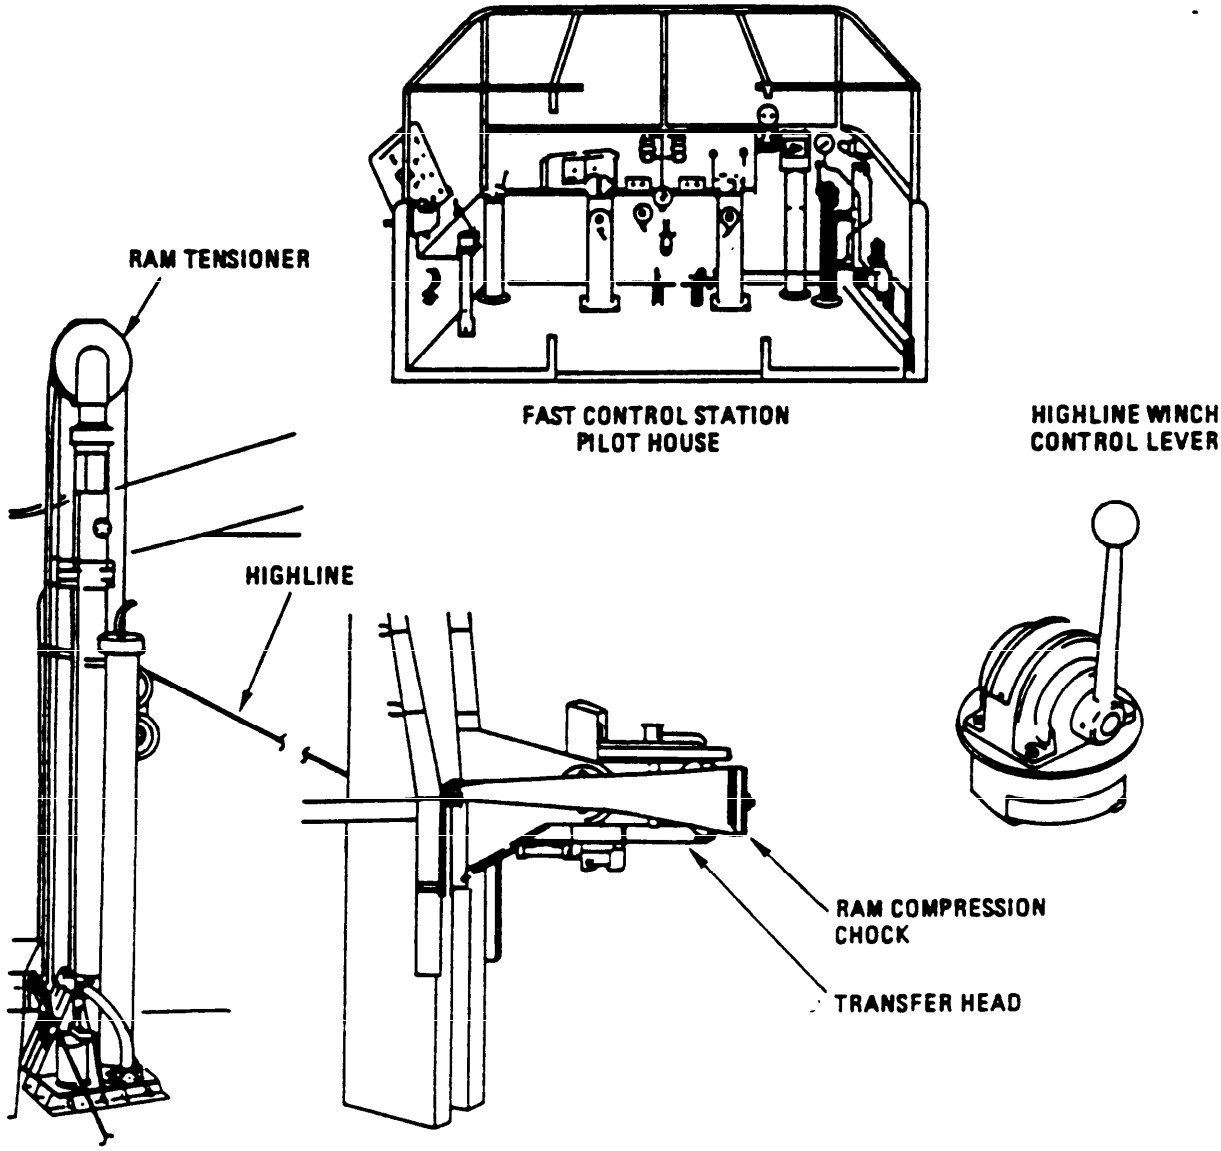

Sample arrangement only. Type size does not conform to minimum specification requirements.

FIGURE 17-3. Compartment areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

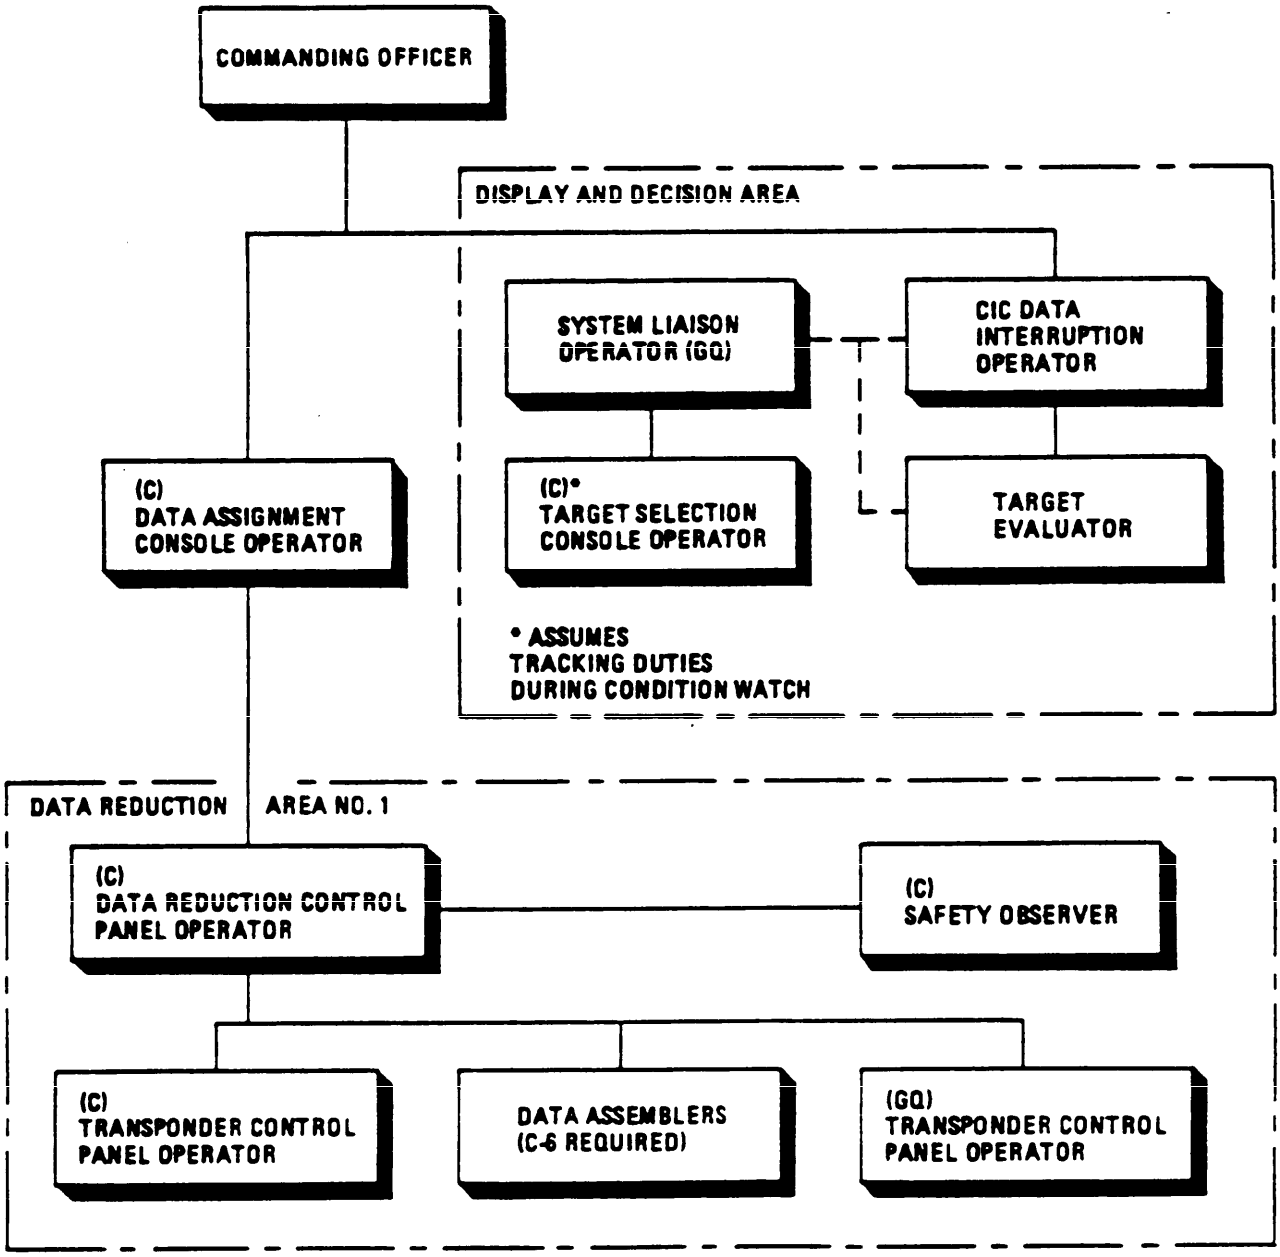

Sample arrangement only. Type size does not conform to minimum specification requirements.

FIGURE 17-4. Conditions of readiness, general quarters conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.


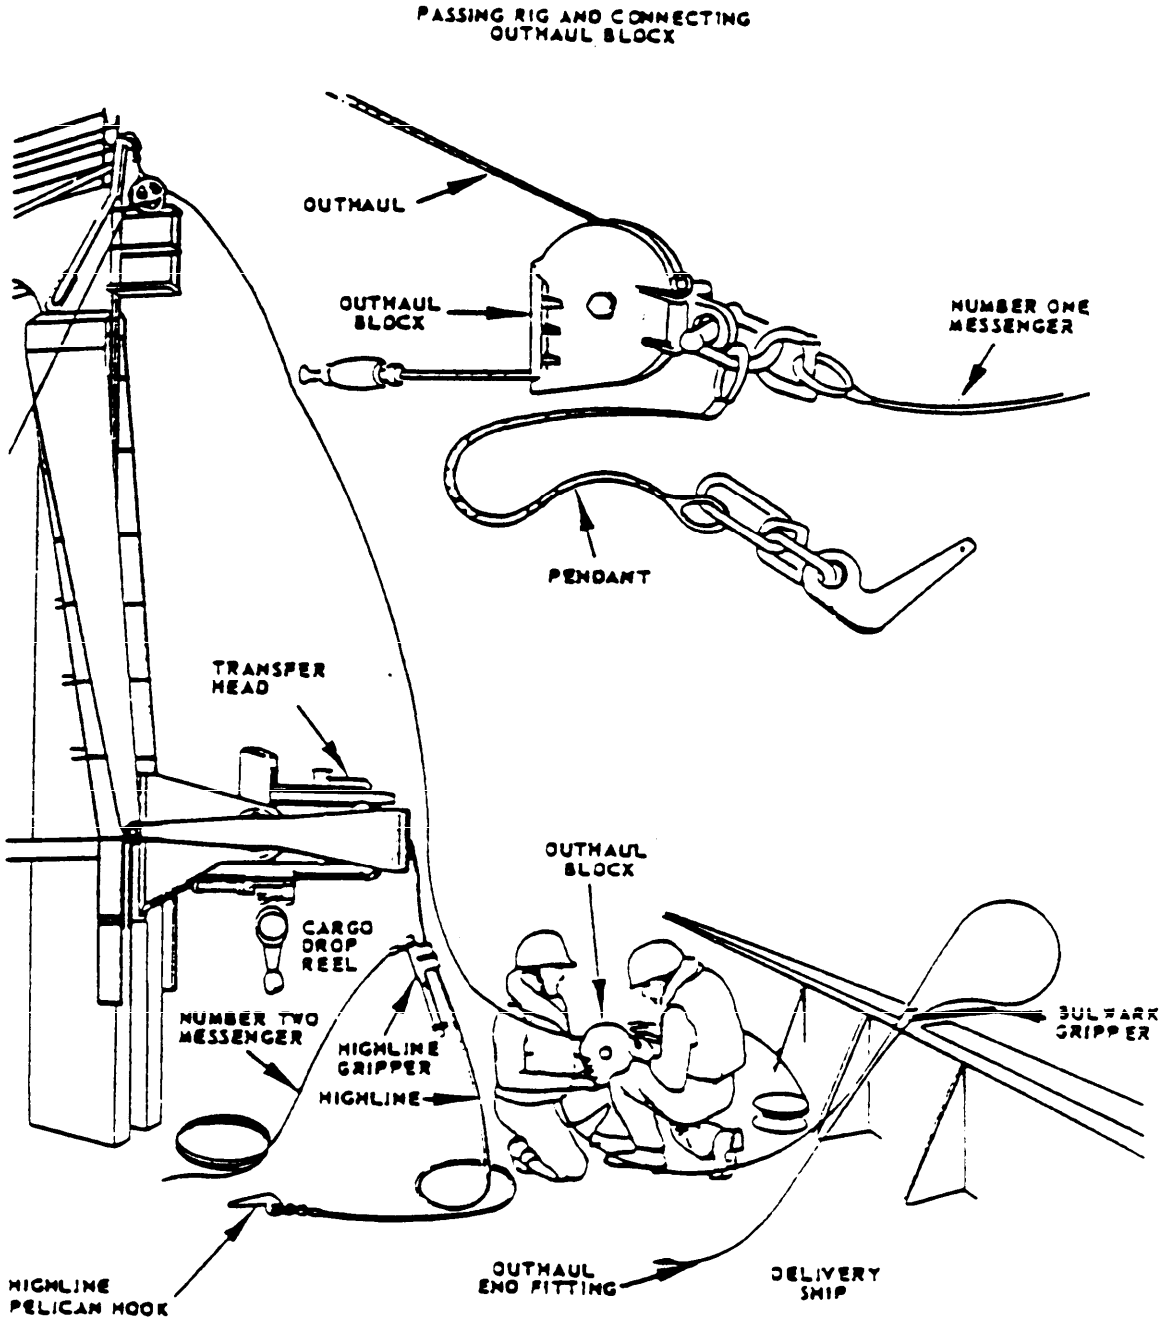


FIGURE 17-5. Operational sequence.


Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:28Z
Check the source to verify that this is the currentversion before use.

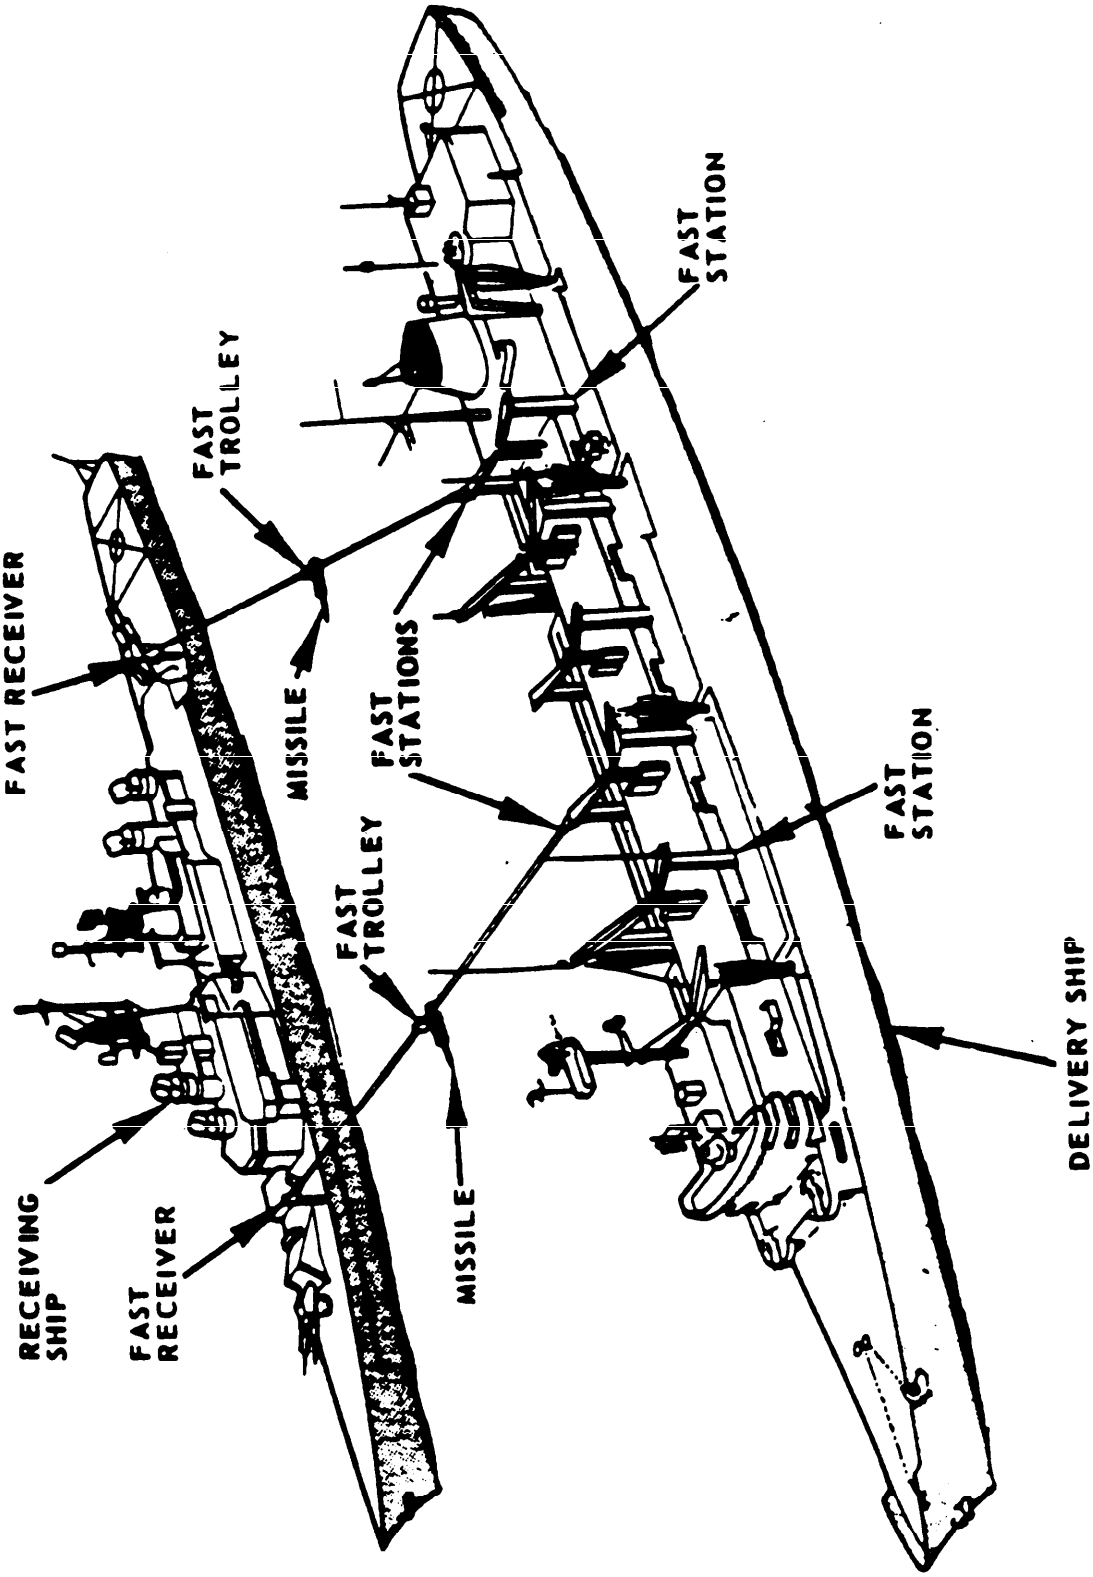

NOTE: Sample arrangement only. Size and legibility do not necessarily conform to minimum specification requirements.

FIGURE 17-6. System illustration showing interfaces.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

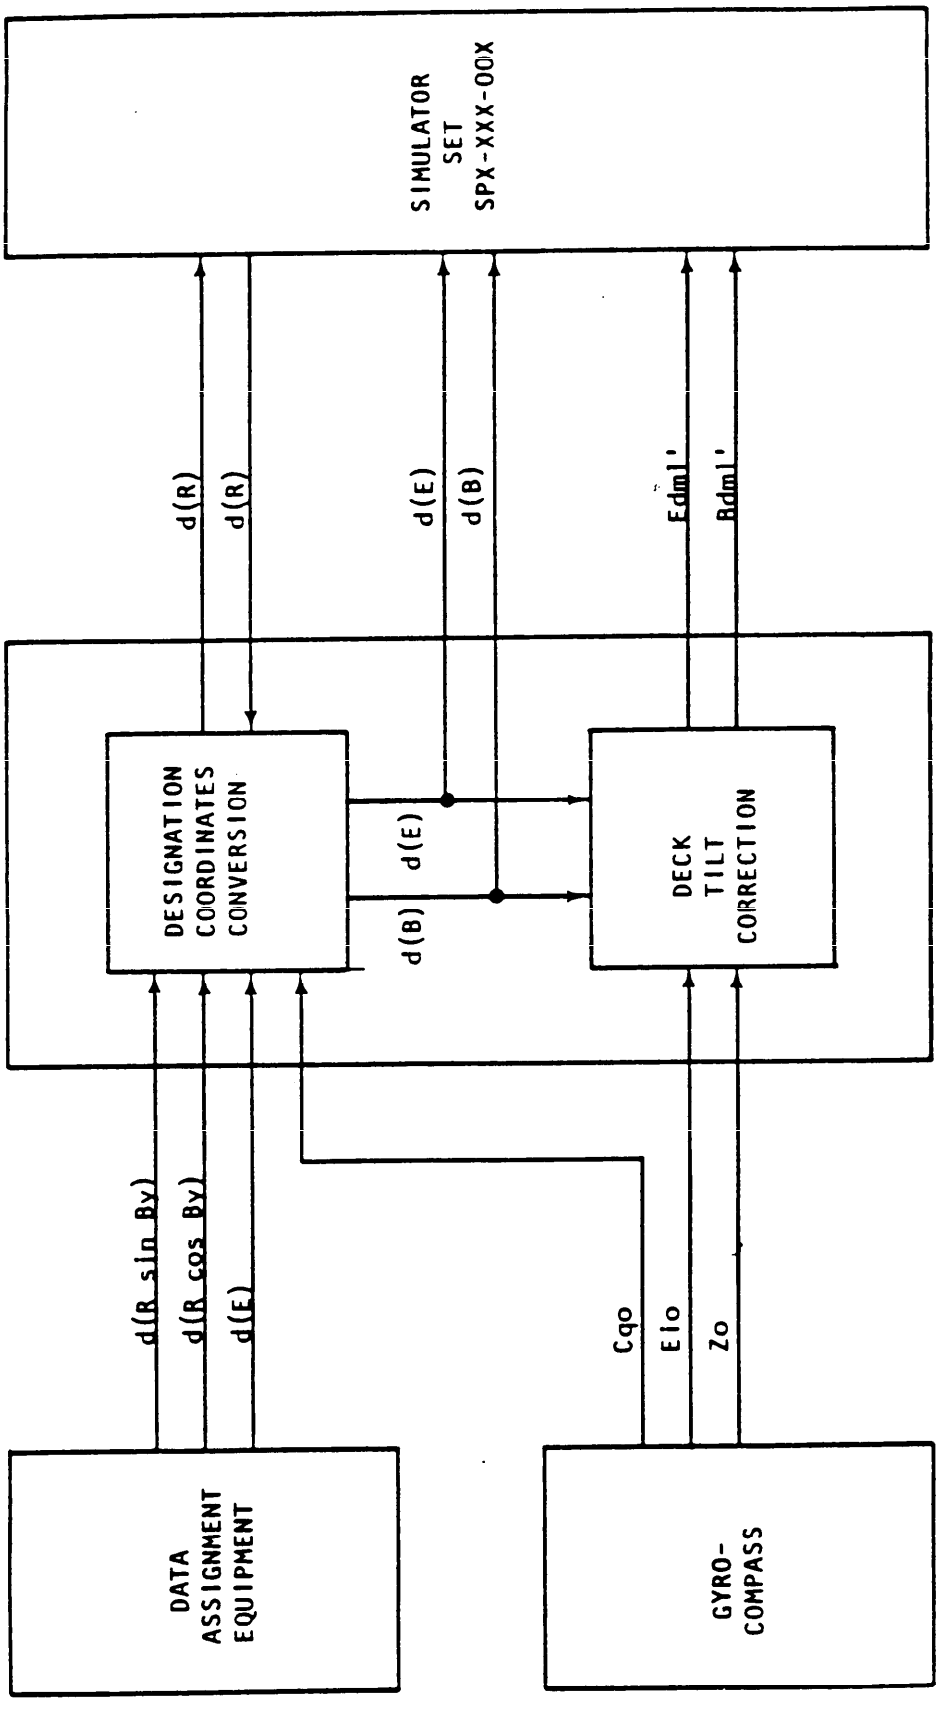

NOTE: Sample arrangement only. Size and legibility do not necessarily conform to minimum specification requirements.

FIGURE 17-7. Functional block diagram, system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

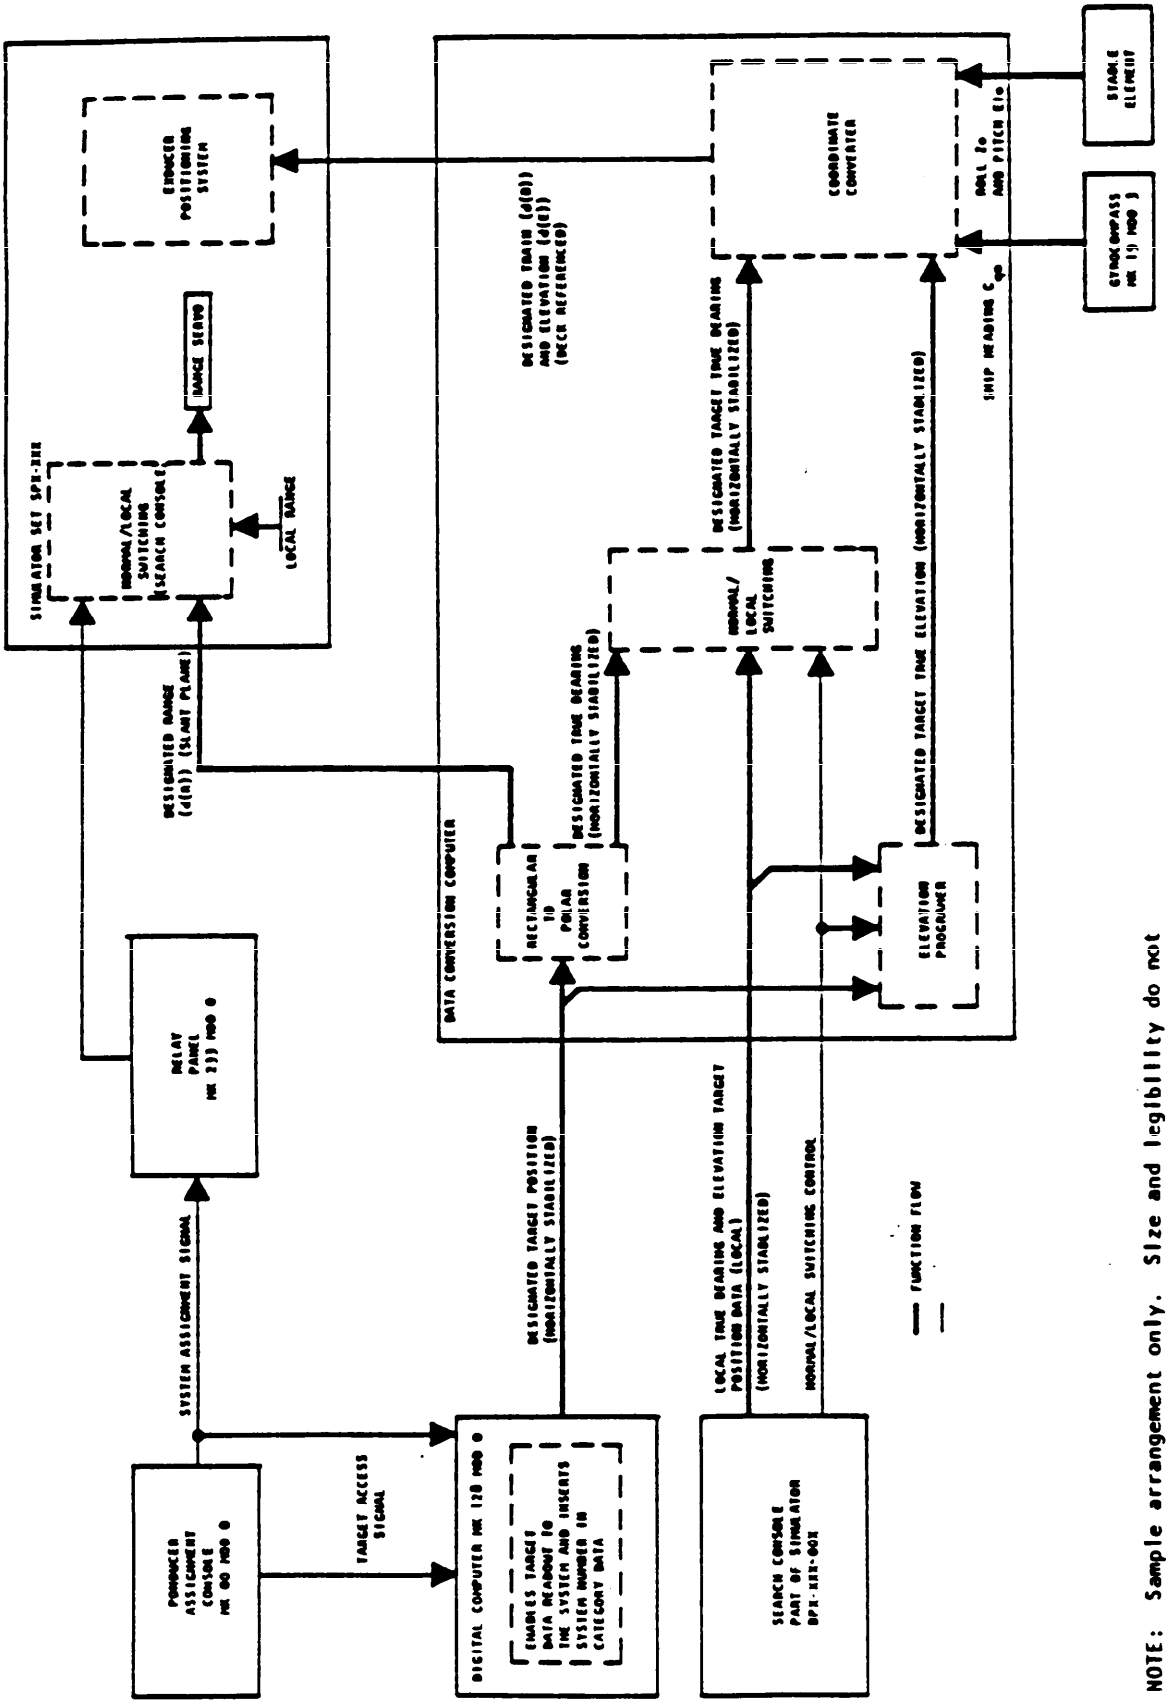

NOTE: Sample arrangement only. Size and legibility do not necessarily conform to minimum specification requirements.

FIGURE 17-8. Functional description electronic system, first level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

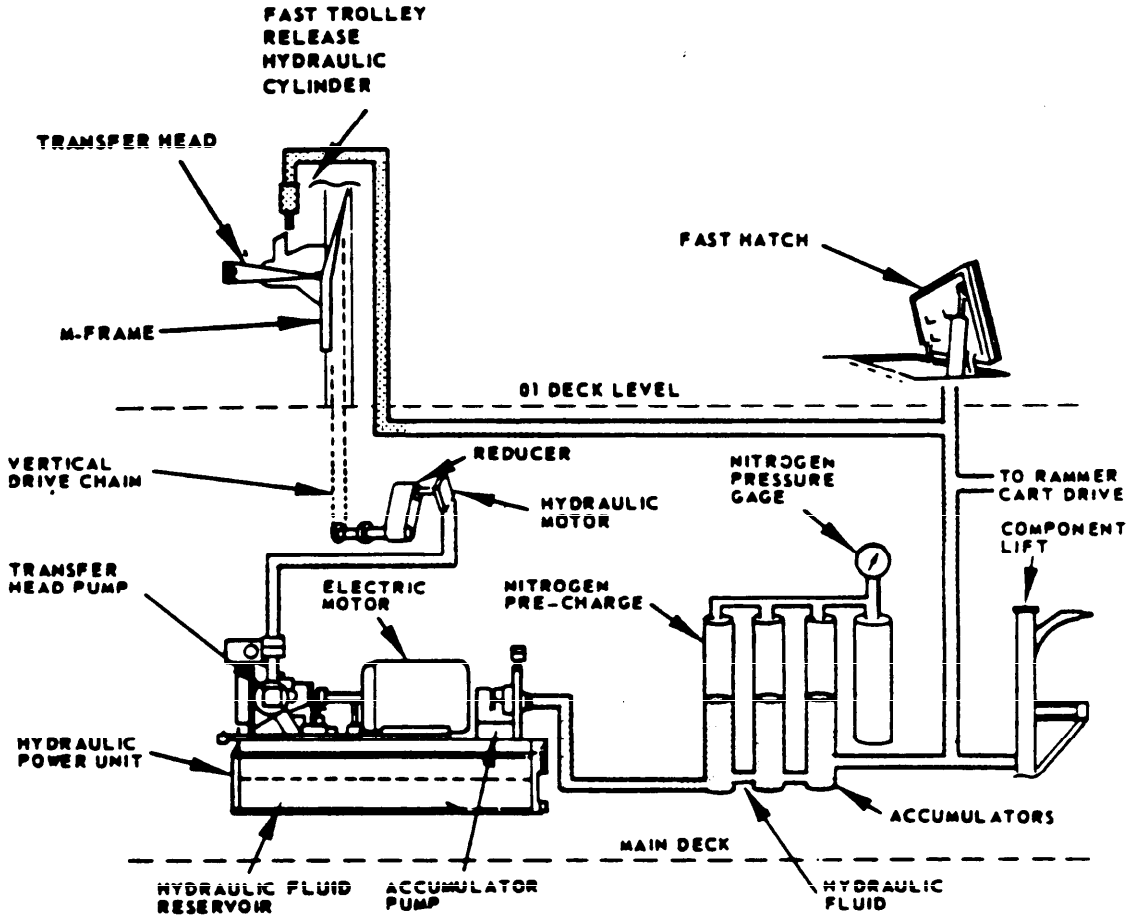


FIGURE 17-9. Functional description diagram for electrical/mechanical system, first level.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:28Z
Check the source to verify that this is the currentversion before use.

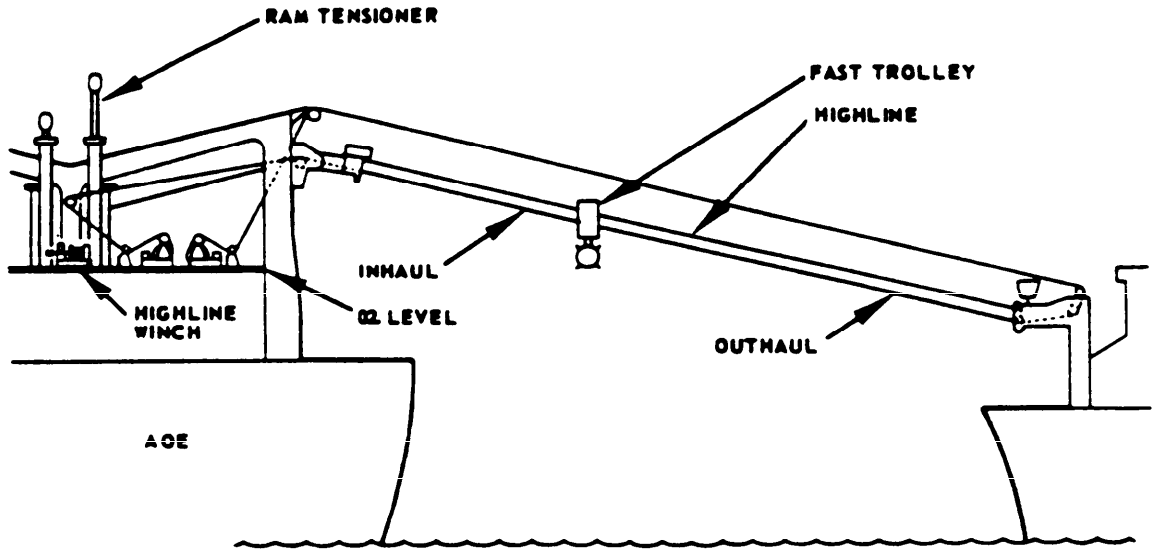


FIGURE 17-10. Functional description diagram for electrical/mechanical system, second level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

TABLE ZZ. Operation-based symptom fault directory.

Operating Procedure Step	Functional Description	FIP	Alignment Procedure	Fault-Isolation Diagrams	Equipment Document
Normal Operating Mode - Paragraph 4- 5					
List the step numbers associated with the fault indications	Noun or Symbolic name of function being monitored	Fault-isolation procedure contained in chapter 7	Applicable alignment procedure and paragraph number required to restore normal operation	List associated fault-isolation diagram	Reference to applicable equipment technical manual number and other TM reference if available
(Example) 4-3. R dial	dCR	Figure 7-1 Para 7-68	Para - 8-4	Figure 7-38 Sheet 2	NAVSEA 0000 Chapter 4
Next Operating Mode - Paragraph 4- 6 (CONTINUE INFORMATION AS ABOVE)					

FIGURE 17-11. Operation - based system fault directory.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T02:28Z
Check the source to verify that this is the currentversion before use.

RADIO RECEIVER R-XXX/URR

NAVSEA

INSTALLATION STANDARDS SUMMARY

Input Voltage_____Vac
Input Frequency_____Hz
(When reference standard tests are made)

Date_____
Serial Number_____
of Model_____
Installed in (ship or station)
_____
Length of transmission line
_____

Record on this summary sheet the test indications which have been obtained during the installation verification test.

Paragraph No.	Ref. Std.	Paragraph No.	Ref. Std.
8-10	a._____ Check	8-46	a._____ µV
			b._____ µV
8-21	a._____ Vdc		c._____ Check
	b._____ Vdc		d._____ µV
	c._____ Vdc		e._____ µV
	d._____ Vdc		f._____ µV
		8-51	a._____ Sec
8-33	a._____ Check		b._____ Check
	b._____ Check		c._____ Check
	c._____ Check		d._____ Hz
	d._____ Check		e._____ Hz
			f._____ Check
			g._____ Check

NOTE: This sheet may be reproduced locally to size of manual page.

FIGURE 17-12. Installation standards summary sheet.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:28Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-M-24784/17(SH)	2. DOCUMENT DATE (YYMMDD) 940906

3. DOCUMENT TITLE
MANUAL, HULL MECHANICAL AND ELECTRICAL (HM&E) SYSTEMS AND ELECTRONIC AND INTERIOR COMMUNICATION (IC) SYSTEMS MANUAL REQUIREMENTS

4. NATURE OF CHANGE (identity paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

A. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

A. NAME Technical Point of Contact (TPOC) MR. MICKEY ANDER, SEA 04TD3 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: DSN: TPOC: 703-602-8701 8-332-8701
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03R42 2531 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:28Z
Check the source to verify that this is the current version before use.