INCH-POUND
MIL-M-24784/16(SH)
6 September 1994
SUPERSEDING
MIL-M-15071H(NAVY)
17 July 1991

ASSOCIATED DETAIL SPECIFICATION

MANUAL, EXPERIMENTAL ELECTRONIC AND INTERIOR COMMUNICATION (IC) EQUIPMENT REQUIREMENTS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification sets forth content requirements for the preparation of technical manuals covering the installation, operation, maintenance, and parts support (without services of manufacturer's representatives) of experimental electronic and interior communication (IC) equipment (see 6.5.3) of military or commercial design (see 6.5.1).

1.1.1 Except when the manual will be used by the Navy for operational evaluation, experiment manuals shall be written to the level of an engineer familiar with the type of equipment involved. The level of writing for these manuals to be used during operational evaluation shall be the same as that of service test manuals (see MIL-M-24784/15).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, SEA 03R42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N6946 AREA TMSS
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-M-008910 - Manuals, Technical: Illustrated Parts Breakdown, Preparation of.
MIL-D-23140 - Drawings, Installation Control for Electronic Equipment.
MIL-P-24534 - Planned Maintenance System: Development of Maintenance Requirements Cards, Maintenance Index Pages, and Associated Documentation.
MIL-M-38807 - Manual, Technical: Illustrated Parts Breakdown, Preparation of.
MIL-M-24784 - Manual, Technical: General Acquisition and Development Requirements.
MIL-M-24784/1 - Manual, Technical Change Package Requirements.
MIL-M-24784/2 - Manual, Technical Revision Requirements.
MIL-M-24784/8 - Manual, Technical Repair Standard (TRS) Requirements for Electronic Equipment.
MIL-M-24784/15 - Manual, Service Test Electronic and IC Equipment Requirements.

STANDARDS

MILITARY

MIL-STD-1364 - General Purpose Electronic Test Equipment.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF DEFENSE (DoD)

DoD 5200.1-R - Information Security Program Regulation.
DoD 5220.22-M - Industrial Security Manual for Safeguarding Classified Information.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

0967-LP-000-0120 - Electronic Installation Maintenance Book Circuits.
ST000-AA-IDX-010/PEETE - Portable Electrical/Electronic Test Equipment (PEETE) Index for Support Requirements of Ship/Shore.
ST000-AB-GYD-010/PEETE - Portable Electrical/Electronic Test Equipment (PEETE) Storage Guide.

(Application for copies should be addressed to the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

DEFENSE LOGISTICS SERVICES CENTER (DLSC)
Cataloging Handbook H4/H8 - Commercial and Government Entity (CAGE).

(Applications for copies should be addressed to the Defense Logistics Services Center, (ATTN: DLSC-JCC), Federal Center, Battle Creek, MI 49017-3084.)

U.S. DEPARTMENT OF COMMERCE, NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY
FIPS-PUB-24 - Flowchart Symbols and their Usage in Information Processing.

(Application for copies should be addressed to the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS (IEEE)
IEEE Std 200-75 - Reference Designations for Electrical and Electronics Parts and Equipments.

(Application for copies should be addressed to the Institute of Electrical and Electronics Engineers, Inc., 345 East 47th Street, New York, NY 10017 or from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications), the text of this specification shall take precedence. When a generic requirement is in conflict with a unique requirement from the governing associated detail specification, the unique requirement shall take precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Security classifications. The overall classification assigned to a technical manual shall agree with the highest classification assigned to any portion within and shall be placed conspicuously at the top and bottom of the Cover/Title page or abbreviated title. Security classification markings shall be in accordance with DoD 5220.22-M and 5200.1-R and shall be placed in accordance with DoD 5220.22-M and 5200.1-R. The security markings shall be the same as for other title pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.2 Deliverable products and data items. The deliverable products and data items shall be specified in the Contract Data Requirements List (CDRL) and shall conform to the requirements specified in MIL-M-24784, and those specified in this section. Data items shall include the following, as applicable:

(a) Outline or book plan.
(b) Review draft copy (RDC).
(c) Preliminary technical manual (PTM).
(d) Final reproducible copy (FRC).
(e) Supplements.
(f) Changes (see 3.2.1).
(g) Revisions (see 3.2.2).
(h) Management data (see 3.2.3).
(i) Cost and pricing data (see MIL-M-24784).

3.2.1 Change packages. When specified (see 6.2), change packages shall be in accordance with MIL-M-24784/1.

3.2.2 Revisions. When specified (see 6.2), revisions shall be in accordance with MIL-M-24784/2.

3.2.3 Management data. Unless otherwise specified see 6.2), the following quality assurance data items shall be provided in accordance with MIL-M-24784:

(a) Technical Manual Quality Assurance Program Plan.
(b) Validation Plan.
(c) Validation Certification.
(d) Technical Manual Evaluation Records.
(e) Verification Plan.
(f) Technical Manual Verification Incorporation Certification.

3.3 Arrangement. Unless otherwise specified, the manual shall be arranged in a standardized format (that is, front matter, technical content, appendices, glossaries, indexes and back matter) and appropriately divided by volume, part, chapter and section in accordance with the requirements of MIL-M-24784, Appendix C.

3.4 Format and preparation instructions.

3.4.1 Writing style. Unless otherwise specified, the style of writing, level of writing, readability, and referencing shall be in accordance with the requirements of MIL-M-24784, Appendix B and the following.

3.4.1.1 Level of writing. Except when the manual shall be used by the Government for operational evaluation, the experimental manual shall be written to the level of an engineer familiar with the type of equipment involved. Manuals to be used during operational evaluation shall be written to a target audience with a Reading Grade Level of nine.

3.4.2 Safety precautions. Unless otherwise specified, safety and health warnings, cautions and notes shall be in accordance with the requirements of MIL-M-24784, Appendix D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.4.3 Tabular material. Unless otherwise specified, the preparation of tables shall be in accordance with the requirements of MIL-M-24784, Appendix E.

3.4.4 Graphics. Unless otherwise specified, the preparation of illustrations, drawings, diagrams and sketches shall be in accordance with the requirements of MIL-M-24784, Appendix F.

3.4.5 Numbering. Unless otherwise specified, the numbering of paragraphs, procedures, divisions, issues, changes, illustrations, tables, and publications shall be in accordance with the requirements of MIL-M-24784, Appendix G.

3.5 Technical content for experimental electronic and interior communications equipment manuals. The following data need not be supplied:

(a) Descriptions of circuits in 0967-LP-000-0120 (see 3.5.4.1c).
(b) Scheduled maintenance action index (see 3.5.5.2).
(c) Reference to troubleshooting actions (see 3.5.5.4h).
(d) Troubleshooting index (see 3.5.6.2.1.1).
(e) Relay, lamp indexes (see 3.5.6.2.1.2).
(f) Protection device index (see 3.5.6.2.1.3).
(g) Maintenance turn-on procedure (see 3.5.6.2.1.4).
(h) Troubleshooting procedures (see 3.5.6.2.2).
(i) Control diagrams (see 3.5.6.2.3).
(j) Power distribution diagrams (see 3.5.6.2.3).
(k) Flow charts (see 3.5.6.2.6).
(l) Troubleshooting dependency diagrams (see 3.5.6.2.8).
(m) Section II, repair (see 3.5.7.3).
(n) Attaching hardware data (see 3.5.8.5 and MIL-M-24784, Appendix E).
(o) Phase 1 - Installation, examination and pre-energizing procedures (see 3.5.9.9.1).

3.5.1 Chapters. The contents shall be arranged in chapters in accordance with the following:

Chapter 1 - General information and safety precautions.
Chapter 2 - Operation.
Chapter 3 - Functional description.
Chapter 4 - Scheduled maintenance.
Chapter 5 - Troubleshooting.
Chapter 6 - Corrective maintenance.
Chapter 7 - Parts list.
Chapter 8 - Installation.

3.5.2 Chapter 1, General information and safety precautions. All safety precautions necessary for the protection of personnel and the ship shall be included and cross-referenced as the initial paragraphs ahead of the introduction. These precautions shall be prepared as specified (see MIL-M-24784). Otherwise, the content of this chapter shall be so that command level, supervisory personnel, and other users having a general interest in the equipment can easily and rapidly determine the purpose, physical and functional characteristics, and the operational capabilities of the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.2.1 Introduction. The introduction shall provide an explanation of the purpose, scope, supersedure data, and ship or shore applicability of the technical manual, including the models, serial numbers, and configurations covered. The interface relationship of the technical manual to other referenced publications and the relationship of the equipment to referenced systems or other equipment shall also be included. Warranty and guarantee information shall be included and shall be in accordance with the Federal Acquisition Regulations, including hardware modifications (such as SHIPALTS, ECPS, MACHALTS, ORDALTS, FCs, and so forth), as applicable (see 6.2).

3.5.2.2 Equipment description. The equipment description shall describe the intended use (why, where, when, how, and with what), capabilities, and limitations of the equipment. Text covering physical description or structural arrangement shall be brief, with special attention given to avoiding unnecessary or repetitious details that are easily illustrated. The equipment, or all units of the equipment shall be clearly illustrated and identified. If the technical manual covers more than one equipment configuration, a table defining the differences shall be included. Assembly and detail drawings as appropriate may be referenced.

3.5.2.3 Equipment illustration. Equipment illustrations shall be in accordance with the requirements of MIL-M-24784.

3.5.2.4 Reference data. Reference data, equivalent to the following, shall be included in tabular form:

(a) Descriptive (identification plate data) which identifies manufacturer, type, model, part or identifying number (PIN), Joint Electronic Type Designation (when applicable), repairable identification code (RIC) and allowance parts list (APL), if available, as applicable.
(b) Functional characteristics, such as: power requirements, horsepower, pressure, capacity, modes of operation, power output, frequency, pulse characteristics, sensitivity, selectivity, including tolerances, where applicable.
(c) Capabilities and limitations, such as: pounds of thrust, knots, turning radius, minimum and maximum ranges, degree of coverage, resolution, accuracy.
(d) Rated outputs, such as: wattages, voltages, horsepower, gallons per minute.
(e) Environmental characteristics, such as: ambient temperatures, heat dissipation per unit, humidity limits.

3.5.2.5 Equipment, accessories and document supplied. A tabular listing of all equipment and documents supplied shall be included. List the equipment and its units (see 6.5.7), and accessories (special tools, test equipment, miscellaneous parts, and Government furnished items) which form a part of, or are supplied with the equipment. The table shall include the following:

(a) Column 1, Quantity. This column shall contain the quantity of each unit and accessories supplied with the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(b) Column 2, Item name or nomenclature. This column shall contain the official name (for example, pump, winch) or nomenclature (name and designation) of each component, unit, or accessory.
(c) Column 3, PIN number, RIC number, or unit number. This column shall contain the PIN, RIC, or unit number of each equipment unit or accessory.
(d) Column 4, Overall dimensions. This column shall contain the crated (if available) and uncrated height, width, and depth in inches (or inches and centimeters) of each unit or accessory.
(e) Column 5, Weight and volume. This column shall contain the crated (if available) and uncrated weight and volume in cubic feet of each unit and accessory.

3.5.2.6 Equipment and publications required but not supplied. A tabular listing of all test equipment and publications required but not supplied with the equipment or system shall be included. Unless otherwise specified, NAVSEA ST000-AA-IDX-010/PEETE shall be used as a guide for the selection and application of test equipment required for shipboard use. If a measurement requirement is established which cannot be satisfied by the subcategory (SCAT) codes listed in this guide, or alternate test procedures cannot be developed utilizing the listed SCAT request for assistance should be directed to:

Commander
Naval Sea Systems Command
Arlington, VA 22242-5160
ATTN: SEA 04DS

The listing shall contain:

(a) Column 1, SCAT code. When applicable, this column shall contain the four digit group of numbers, which is included in NAVSEA ST000-AA-IDX-010/PEETE used to identify a measurement requirement.
(b) Column 2, Test equipment category. This column shall contain the item name of each item of equipment required.
(c) Column 3, Representative test equipment model number. This column shall contain the model number of the standard or Substitute Standard General Purpose Electronic Test Equipment (GPETE), listed in MIL-STD-1364, which can be used to satisfy the measurement parameters.
(d) Column 4, Equipment test parameters. This column shall specify the range of test parameters which must be satisfied by this test equipment item (it shall not define the ranges of the test equipment model).
(e) Column 5, Application. This column shall indicate the intended use of the test equipment (for example, scheduled maintenance, troubleshooting, corrective maintenance, or installation).

3.5.2.7 Field and factory changes. Equipment changes (for example, field changes, factory changes, engineering changes or notices, modifications, and so forth) shall be identified and included in separate tables. Field and factory changes shall be included as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(a) Column 1, Change number. This column shall list the change number for each field and factory change considered and included in the preparation of the manual.
(b) Column 2, Nomenclature. This column shall list the equipment nomenclature and Government serial numbers of equipments affected by the change.
(c) Column 3, Description. This column shall contain a brief statement identifying the change and its purpose.

3.5.2.8 User's comments procedure. A brief instruction to the manual user shall specify that comments or recommendations concerning the manual are to be forwarded for consideration (see MIL-M-24784).

3.5.3 Chapter 2, Operation. Operating instructions shall include all the procedures necessary to enable operating personnel to efficiently and effectively use the equipment in accomplishing its designated task. These operating instructions shall be in sufficient detail to allow operators, having previous experience in the operation of similar or related equipment, to independently and safely operate the equipment without additional training or explanation.

3.5.3.1 Introduction. The introduction shall describe each operator's relationship to the equipment and each other, and shall identify those units having controls and indicators which he is expected to use in the performance of his duties. The introduction shall be supported by illustrations which identify and locate all operator controls and indicators. The intended function and application of the equipment shall be fully explained so that the operators will know exactly what they should expect to accomplish with the equipment.

3.5.3.2 Controls and indicators. A description of all operator controls, indicators, protective devices and jacks shall include the following:

(a) Names of panel designations as marked on the equipment.
(b) Positions and operating functions for each control, and the normal operating condition of each indicator in each of the operating functions in tabular format.
(c) The text shall be supported by detailed illustrations (see figure 16-1).
(d) When more than one operator is required to operate the equipment, his designated position and function, and the relationship to his controls and indicators shall be specified.

3.5.3.3 Operating procedures. Operating procedures shall include the following:

(a) Operator turn-on. All steps necessary to bring the equipment from OFF through STANDBY condition to full operation.
(b) Modes of operation. Procedures for each mode of operation, for example, manual, automatic, local, remote, and so forth. The use and relative advantage of each mode shall also be described.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(c) Operation under interfering conditions. Describe the equipment antijamming and interference reduction features, the advantages of each feature, and the operating procedures to be followed in all possible situations. Supporting illustrations (such as indicator displays, wave forms, and so forth) shall be included which provide typical observations of jamming and interference for evaluation by the operator.
(d) Operator turn-off. This procedure shall include all steps necessary to bring the equipment from full operation through STANDBY to OFF condition.
(e) Battle-short or emergency operation. This procedure shall cover operating the equipment during emergency conditions (control failure, air failure, lube oil failure, loss of cooling water, and so forth). Emergency operator instructions shall be included. Provide a warning or caution to return the equipment to proper operation when the emergency is over.
(f) Emergency turn-off. This procedure shall cover turning the equipment off during an emergency (fire, water, smoke, hazard to personnel, loss of coolant, normal power, and so forth).
(g) Electromagnetic Interference (EMI). This procedure shall include information pertaining to the recognition of EMI (such as sights, sounds, lack of response, or other irregularities) and operating procedures to cope with them during operations.

3.5.3.3.1 Method of presentation. Operating procedures shall be presented in tabular form and shall be in concise, simply-worded, step-by-step procedures (see MIL-M-24784) and shall include the following:

(a) A short explanation of the operation to be performed.
(b) Initial safety requirements (actions, inspections, and reference to emergency turn-off procedures).
(c) Connection of any accessory equipment not permanently connected.
(d) Instructions for obtaining or confirming the presence of all critical inputs such as power, coolant, air, signal, air conditioning, and so forth.
(e) Procedures for setting controls and making adjustments which shall be accomplished by the operator prior to equipment turn-on.
(f) Procedures for determining operational readiness and the acceptable indications expected from built-in indicators such as meters, lamps, gauges, cathode ray tubes, and recorder readouts.
(g) Milestones in the operational status of the equipment shall be identified and included by brief statements such as "the generator is now in STANDBY".
(h) Visual or aural observations which occur as a result of an operator action, such as boom lowering, sweep rotation, blower motor running, and so forth.
(i) Procedures that can be hazardous to personnel or equipment shall be emphasized by WARNINGS or CAUTIONS, as applicable. "Notes" are allowable (see MIL-M-24784).
(j) Illustrative material supporting the procedures shall identify and locate all operating controls and indicating devices as well as normal in-use positions or indications.
(k) Operator's checks and adjustments in proper sequence.
(l) Operator's maintenance actions and schedules.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.3.4 Operators maintenance instructions and schedules. These instructions shall define maintenance tasks and schedules to be performed by the operator. The maintenance tasks shall be limited in scope so that they shall not be in conflict with his operational commitment; will not be beyond his technical training; will not be dangerous; will not be the responsibility of the maintenance technician; and will not potentially comprise the operation of the equipment. Normally these tasks shall be restricted to minor adjustments, cleaning, and fuse or lamp replacement.

3.5.3.4.1 Method of presentation. Maintenance procedures shall be in concise, simply-worded, step-by-step procedures and shall include the following:

(a) A short explanation of the task to be performed.
(b) Initial safety requirements (actions, inspections, and reference to emergency turn-off procedures).
(c) Separately identified and defined steps for each task and major subroutine.
(d) Where possible, a limit of 10 steps to each identified task or subtask.
(e) Procedure that can be hazardous to personnel or equipment shall be emphasized by WARNINGS and CAUTIONS, as applicable. "Notes" shall not be used (see MIL-M-24784).
(f) Illustrative material supporting the procedures shall identify and locate all maintenance points with clear pictorials showing essential details.
(g) Reference to the standard log sheet, if applicable, see MIL-M-24784.

3.5.3.5 Standard log forms (model set). Unless otherwise specified (see 6.2), a model, or model set, standardized log form (see MIL-M-24784) developed from design engineering data shall be included at the end of Chapter 2 for equipment requiring the periodic recording of data for monitoring its performance and accomplishing trend analysis.

3.5.3.5.1 Applicability. Operating machinery and equipment which are integrated into functioning ships and facility systems similar, but not limited to, the following types of equipment, shall include the model log form:

(a) High pressure air compressors (HPAC).
(b) Diesel engines.
(c) Air conditioning plants.
(d) Carbon dioxide scrubbers.
(e) Carbon monoxide - hydrogen burners.
(f) Steam or vapor distilling plants.
(g) Turbine generators.
(h) Electronic equipment cooling water and dry air systems.
(i) Boilers.
(j) Propulsion plants.

3.5.3.5.1.1 Waiver of requirement. When it is deemed necessary that the development of such a form would be of no value to the Government for the equipment being covered, a waiver (with justification and rationale) for standard log form requirements shall be requested at least 3 months prior to submittal of the review draft copy (RDC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.3.5.2 Criteria. The "model" standardized log form shall serve as an operating log that shall be a guide to all ships of all classes. It is not intended that this model shall in any way inhibit an individual ship from accommodating its specific needs through the addition or deletion of readings as deemed necessary on a case basis. The basic criteria to be utilized in developing the model shall be:

(a) Analyzing the various parameters associated with monitoring the performance of the equipment to ascertain those that provide trend determinant information.
(b) Synthesizing the results of the above analysis to ensure that only "key" (that is, necessary) parameters are included; the goal being to keep to an absolute minimum the total number of log readings required in running the plant.
(c) Arranging the order of monitoring on the appropriate log forms in such a manner that the log keeper and the reviewing officer can quickly tell when problems, either short-term or long-term in nature, are beginning to develop (that is, by function as opposed to order of physical arrangement).
(d) Duplicate readings shall be eliminated where feasible (that is, where the parameter is generally associated with a single function and where duplicated readings are not normally compared with one another).

3.5.3.5.3 Training summary. A training summary for use of the form shall also be included in Chapter 2. It shall indicate how to use the chart and an explanation of the significance of the monitoring points and readings.

3.5.3.5.4 Request for number. The contractor shall advise the Government of the requirement for log forms. The Government shall arrange for a forms stock number, and printing and stocking of the log form.

3.5.4 Chapter 3, Functional description.

3.5.4.1 Functional description. When specified (see 6.2), Chapter 3 shall include a detailed analysis of the principles of operations of the overall equipment and its functions. The development of the equipment functions in every mode of operation shall be described. The structure and organization of this chapter shall parallel the organization of Chapter 5, troubleshooting. The text shall refer to and support the Chapter 5 functional troubleshooting diagrams. The descriptions shall be presented in successive levels of increasing detail as follows:

(a) Overall level (level 1). The text shall support and refer to the overall functional block diagram (see MIL-M-24784). All major functions (see 6.5.4) such as transmit, receive, control, display, power distribution, cooling, and so forth shall be described at this level.
(b) Major function level (level 2). Describe the development of each major function at the level of detail shown on its related signal flow diagram, logic diagram, or other diagram included in Chapter 5. The text shall support and refer directly to the diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(c) Circuit level (level 3). Briefly describe conventional electronic circuits found in NAVSEA 0967-LP-000-0120; refer to the maintenance schematic diagrams in Chapter 5. Describe in detail circuits not covered in NAVSEA 0967-LP-000-0120; support these circuits by simplified schematic diagrams (see MIL-M-24784). Describe alternating current (ac) and direct current (dc) power distribution in detail; support the descriptions by reference to the power distribution diagrams in Chapter 5. Describe mechanical devices, cooling systems, and so forth; support the descriptions by reference to mechanical schematic, overall and functional block diagrams.

3.5.4.2 Integrated circuits and micro-miniature capsules. Simplified schematics in accordance with NAVSEA 0967-LP-000-0120 or logic diagrams showing input and output connections, truth tables, and waveforms as applicable, supported by a brief description of overall functional operation, shall be included for circuits within different types of nonrepairable integrated circuits and micro miniature capsules. Nonrepairable circuits are not required for functional understandings of theory of operation. Manufacturer's data sheet information may also be included if it contains the technical contents of this requirement and meets the format and legibility requirements of this specification.

3.5.4.3 Digital equipment. The functional description of digital equipment shall be similar to that for conventional equipment. However, the functional and hardware makeup of digital equipment requires a variation in the method of presentation and descriptive requirements. Special considerations relative to the functional description of digital equipment are specified herein.

3.5.4.3.1 Method of presentation. An overall description of the functional relationship of the logic sections, units, and assemblies comprising the equipment shall be provided. The following shall be included:

(a) An introduction to, and description of the signal characteristics:

(1) Signal levels or bi-stable states utilized by the equipment; that is, true (1) and false (0), and their relative voltage levels.
(2) Interpretation of the word-code bit structure; that is, address, instruction, or data bit codes.
(3) Signals, identified by their operational accomplishment.

(b) Overall and functional block diagrams and descriptions.
(c) Logic principles shall be described beginning with an introduction to the basic digital logic symbology used in the manual. Each logic function shall be described and supported by Boolean equations, truth tables, simplified logic diagrams, and timing diagrams.
(d) Functional description of power distribution, power supplies, and regulators shall conform to 3.5.4.1c.

3.5.5 Chapter 4, Scheduled maintenance. It is intended that the engineering effort required to develop preventive maintenance data be expended only once and that the data, where applicable be used both in this chapter and in Logistic

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

Support Analysis (LSA) or maintenance requirements cards (MRC) where one or more of the latter three data items are required by the contract. The preparation of this chapter of the manual should therefore be delayed until completion of the, LSA or MRC; submissions of the manual draft copy for review should be marked "TO BE SUPPLIED UPON COMPLETION OF LSA". When the approved LSA, or MRC data is available, it shall be included in the manual in the identical technical content and, wherever practicable, in the identical format. When included in the manual, such LSA, or MRC data shall be integrated with other technical data required by this specification to be in this chapter. The manual as delivered shall reflect the detailed maintenance requirements of the completed Maintenance Requirements Cards. This chapter shall contain preventive maintenance procedures and performance test instructions to be accomplished on a scheduled or condition monitoring basis. MIL-P-24534 may be used as baselines for developing the procedures. When a maintenance requirement card or a reference standards book is available or prepared under the same contract, this information may be duplicated in the technical manual without change in format. These procedures shall be correlated with the installation checkout requirements of 3.5.9.9 such that any maintenance or performance test procedure also required for checkout may be properly referenced from Chapter 8, Installation. The Installation Standards Summary Sheet (see 3.5.9.9.3.2) shall also include space for any maintenance or performance standard test result that should be recorded by the installer. The recorded information shall provide a reference standard to the Navy technician when troubleshooting or when needed for installation acceptance certification or for certifying proper overhaul.

3.5.5.1 Introduction. The introduction shall be an explanation of the purpose, scope, and arrangement of the scheduled maintenance data. When a preventive maintenance procedure is critical to the operation of the equipment and the schedule for servicing is absolute (not just recommended), this information shall be conspicuously written as a caution. The following applicability statement shall be included:

> "The scheduled maintenance instructions in this manual are intended to duplicate those furnished in the Planned Maintenance Systems (PMS). In case of conflicts, the PMS documentation takes precedence. Such conflicts should be reported immediately on the user comment sheet in accordance with the maintenance procedures for this manual."

3.5.5.2 Scheduled maintenance action index. When specified (see 6.2), this index shall include all scheduled performance procedures. The index shall be tests and preventive maintenance tabulated as follows:

(a) Column 1, Periodicity. This column shall contain an alphanumeric list of all maintenance actions contained in the chapter. The following periodicity symbols, as appropriate, shall be used in the order of increasing periodicity as listed below:

Interval	Symbols
Daily	D
Weekly	W
Monthly	M

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

Interval	Symbols
Quarterly (3 months)	Q
Semiannually (6 months)	S
Annually	A
Overhaul cycle	C
As specified (explain circumstances)	R1/

1/ An R periodicity shall be preceded by a recommended calendar periodicity (for example, DR, WR, MR, and so forth).

(b) Column 2, Maintenance action. This column shall list the maintenance action which corresponds to the periodicity number in column 1.
(c) Column 3, Reference. This column shall state the paragraph number that contains the procedure listed in column 2.

3.5.5.3 Preventive maintenance procedures. These procedures shall include information required to examine, clean, and lubricate the equipment, and shall contain:

(a) Safety precautions.
(b) Tools, parts, materials, and test equipment.
(c) Cleaning solvents. Solvents shall be identified by Government specification numbers and National stock numbers.
(d) Instructions for properly maintaining all safety devices and interlocks with warnings, and cautions.
(e) Instructions for lubrication at shipboard operating temperatures; also types and quantities of lubricants to be applied. Lubricants shall be identified by Government specification numbers and National Stock Numbers (NSNs). Specific lubricants for arctic or tropic environments shall be included. When a proprietary lubricant is approved, a Government Specification lubricant shall be listed as an emergency substitute.
(f) The minimum rating of the technician who can be expected to perform the task.
(g) Procedures of obtaining access to subassemblies of subcomponents.
(h) Instructions for in-place balancing and noise reduction.
(i) Inspection procedures for parts which deteriorate due to cycles of use, age, or climatic conditions.
(j) Illustrations to identify lubrication points and other pertinent data.
(k) Other information pertinent to these procedures.

3.5.5.4 Scheduled performance tests. These tests shall contain step-by-step procedures necessary to verify that the equipment is operating within standards in all modes of operation and shall contain the following:

(a) Safety precautions.
(b) A list of tools and test equipment identified by type, manufacturer, and model number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(c) The title of the test to be performed.
(d) The minimum rating of the technician expected to perform the task.
(e) Preliminary setup data required to perform the test.
(f) Detailed procedures for accomplishing the test. Procedures requiring lengthy and identical setup data shall be presented in detail in one procedure and referenced in succeeding procedures.
(g) Values or conditions, with tolerances, indicative of normal operation.
(h) References to troubleshooting or corrective actions to be used if the test values are not within tolerances.
(i) Illustrations to support the test.

3.5.6 Chapter 5, Troubleshooting. Troubleshooting procedures and data shall contain all information necessary for a technician to locate a malfunction in the equipment. Troubleshooting shall be presented based on locating potential faults in a unit, assembly, subassembly module, or piece part, depending on the maintenance concept (see 6.5.6) for the level of maintenance being performed. When the troubleshooting concept limits the location of a fault to a repairable item (such as the unit, assembly, subassembly or module) for organizational level maintenance, troubleshooting procedures and data shall also be presented that will permit a repair of the item at the intermediate- or depot-level maintenance facility, except when this information is included in another technical manual and the procedures can be directly referenced. When more than one level of maintenance must be provided for, organizational- and intermediate-level troubleshooting procedures shall be separated so that the organizational-level troubleshooting procedures are identified as "Organizational-level troubleshooting", and are presented first. Intermediate-level troubleshooting procedures shall follow organizational-level procedures and shall be identified "Intermediate-level procedures". Immediately following this title the following statement shall be included: "These procedures are authorized for accomplishment by Depot-level activities only."

[When a separate depot-level manual is required (see 6.2), it shall include the information required by MIL-M-24784/8.]

3.5.6.1 Troubleshooting instructions. This chapter shall contain all instructions and information necessary to locate troubles and conduct tests on each component, assembly, or subassembly of the equipment as follows:

(a) Troubleshooting guides providing step-by-step procedures for logical isolation of faults. This information shall direct the technician to observe meters, fuses, circuit breakers, valves, and other available indicators which would indicate the presence of trouble.
(b) Complete instructions on signal tracing for electrical circuits including the use of special test instruments and unusual servicing techniques.
(c) Where appropriate because of equipment complexity, troubleshooting diagrams (see MIL-M-24784) including schematics giving details of mechanical and electrical assemblies and relationships as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(1) Mechanical schematic diagrams.
(2) Signal flow diagrams.
(3) Piping diagrams.
(4) Control diagrams.
(5) Power distribution diagrams.
(6) Maintenance schematic diagrams in accordance with MIL-M-24784, Appendix E.

3.5.6.2 Troubleshooting data. This chapter shall contain all the information required to enable the technician to locate malfunctions in the equipment.

3.5.6.2.1 Introduction. The introduction shall explain the approach and logic of the troubleshooting principles presented in the manual. Describe the troubleshooting data and show how they relate to one another.

3.5.6.2.1.1 Troubleshooting index. When specified (see 6.2), the troubleshooting index shall be presented in tabular form (see MIL-M-24784).

3.5.6.2.1.2 Relay coil, switch and indicator lamp indexes. When specified (see 6.2), these indexes shall be in tabular form for all relay coils, switches and indicator lamps (see MIL-M-24784).

3.5.6.2.1.3 Protective device index. When specified (see 6.2), this index shall list all protective devices, such as fuses, circuit breakers, and so forth in tabular form (see MIL-M-24784).

3.5.6.2.1.4 Maintenance turn-on procedure. When specified (see 6.2), include a maintenance turn-on procedure to energize the equipment from the fully de-energized condition to full operation (see figure 16-2). This procedure shall enable the technician to determine which major function or supporting function is malfunctioning. Each step of the procedure shall include the action to be taken (STEP), the observation to be made (OBSERVE), and shall presume that normal conditions have been observed in previous steps. Reference shall be made to the procedure for troubleshooting or corrective action to be used (REFERENCE) if the observation is out of tolerance. Built-in monitors such as meters, dials, lamps, and so forth, shall be used when possible for making observations, as opposed to the use of external test equipment. The procedure is complete when the equipment is fully energized and all switches and controls are positioned for proper operation. The maintenance turn-on procedure may be presented in a troubleshooting dependency diagram (see 3.5.6.2.8).

3.5.6.2.2 Troubleshooting procedures. When specified (see 6.2), troubleshooting procedures shall be directly related to, and support the troubleshooting diagrams. Troubleshooting information shall be developed to guide a technician in the logical order of isolating a fault. This information shall direct the technician to observe meters, fuses, circuit breakers, valves, built-in test equipment, and other available indications showing the presence of trouble. The analysis of normal indications in relation to faulty indications shall be stressed. This information may be in tabular, illustrative, or narrative format, whichever lends to faster troubleshooting. Test programs shall be developed for digital devices when the method is the most practical method of troubleshooting logic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.6.2.3 Troubleshooting diagrams. Troubleshooting diagrams shall consist of signal flow diagrams, piping diagrams, control diagrams, power distribution diagrams, logic diagrams, maintenance schematic diagrams, and dependency diagrams, as required.

3.5.6.2.4 Integrated circuitry packages and nonrepairable assemblies. When integrated circuit packaging techniques, such as Dual In-Line packages, are utilized, the level of detail on the logic diagrams may be restricted to that necessary to isolate problems to either a specific integrated circuit package or if the maintenance concept so dictates, to a specific nonrepairable assembly, providing there is sufficient detail to understand the process of troubleshooting.

3.5.6.2.5 Assemblies, subassemblies, modules, standard electronic modules, designated nonrepairable. Logic diagrams, functional information, hardware and test data shall be supplied to the extent that it is required to understand the operation of the equipment, concept of troubleshooting, and to serve the basis for affecting a critical repair.

3.5.6.2.6 Flow charts. When specified (see 6.2), flow charts for digital devices shall be provided to support the explanation of machine instructions and test programs, and shall conform to FIPS PUB 24.

3.5.6.2.7 Coding instructions sheets. Coding instruction sheets shall be provided for all programs. The listing shall contain all coding and address data as well as an adequate notes section to ensure understanding (see figure 16-3).

3.5.6.2.7.1 Test programs. Test programs with coding instruction sheets shall be developed and included to support troubleshooting procedures.

3.5.6.2.8 Troubleshooting dependency diagrams. One of the following types of troubleshooting diagrams shall be provided to augment the troubleshooting procedures. Supporting information required to explain the use of the diagrams shall be provided in the test or general notes.

(a) Fault logic diagrams (see MIL-M-24784).
(b) Troubleshooting-maintenance dependency-matrix chart (see MIL-M-24784).

3.5.7 Chapter 6, Corrective maintenance. This chapter shall contain instructions required to adjust and align the equipment, remove, clean, inspect, repair, reinstall, and align all repairable parts, modules, subassemblies, and assemblies. The instructions shall identify the action to be accomplished; safety precautions to be observed; tools, parts, materials, and test equipment required; preliminary control settings; test equipment setup instructions; and step-by-step instructions, with supporting illustrations, to accomplish the maintenance task. Corrective maintenance instructions shall be provided for all items designated repairable irrespective of the maintenance concept unless this information is included in another technical manual and can be referenced.

3.5.7.1 Introduction. The introduction shall contain an explanation of the purpose, scope, and arrangement of the corrective maintenance data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.7.2 Section I, Adjustments and alignment. This section shall contain all information and procedures required to perform all necessary adjustments and alignments as follows:

(a) Nonoperator type adjustments.
(b) Alignments requiring external jigs, test equipment, or bench setups.
(c) Alignments that are accomplished after a repair or replacement of a part or module.
(d) Test equipment setup and other illustrations necessary to support the procedures.

3.5.7.3 Section II, Repair. The repair section shall contain all procedures required in the repair of assemblies and repairable parts. Repair procedures shall include but not be limited to the following:

(a) Removal, disassembly, and inspection.
(b) Repair or replacement of piece parts.
(c) Cleaning and inspection.
(d) Preassembly, adjustment, installation, calibration, and checkout.
(e) Exploded views, sectional views, wiring diagrams, and photographs (if absolutely necessary see MIL-M-24784) to support the procedures.
(f) Obvious repair actions such as soldering, use of multimeters, hand tools, and so forth shall not be included except where these actions involve hazards to personnel or equipment.
(g) Repair procedures shall be arranged in numeric-alpha unit designation order of the equipment.

3.5.7.4 Supporting illustrations and data. The use of clear, sharp illustrations to supplement description and maintenance coverage is required. Exploded views are required for parts location illustration. As a minimum, illustrations or sketches of the following shall, when applicable, be included:

(a) Typical bearings for rotating or moving equipment.
(b) Method of taking clearance measurements where required.
(c) Typical mechanism for absorbing thrust where applicable.
(d) Locking devices when applicable.
(e) Typical seal assembly (pressure or vacuum seals or controlled leakage between rotor and casing).
(f) Typical assembly or blading to rotor, with lock devices, where applicable.
(g) Typical assembly of field poles, laminated core iron, electrical windings, commutator, slip rings, and brush rigging where applicable.
(h) Equipment assembly with upper casing partially removed.
(i) Series of illustrations showing installation of supervisory instruments (such as RTEs in bearings).

3.5.8 Chapter 7, Parts list. Unless a separate illustrated parts breakdown is acquired for the system or equipment in accordance with MIL-M-008910 or MIL-M-38807, the parts list shall conform to all requirements for Chapter 7 herein. When an illustrated parts breakdown is so acquired, the requirements for

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

Chapter 7 shall be modified as required to ensure compatibility between the documents and harmony of the technical manual requirements (see 6.2). The parts list shall list and identify and shall reference or include an illustration that will show the location of all repair parts, (see 3.5.8.7). All mechanical parts subject to replacement, although not provisioned as a spare part, such as handles, slides, plates, covers, and so forth included in the provisioning documentation shall be included in the parts list and identified in the respective parts-location diagram. This chapter shall include the following:

(a) Introduction.
(b) List of major components or list of major units in top-down breakdown sequence.
(c) Parts list.
(d) List of common item descriptions.
(e) List of attaching hardware.
(f) List of manufacturers.
(g) Parts location illustrations.

3.5.8.1 Introduction. The introduction shall contain an explanation of the scope and arrangement of the parts list. The following type of information shall be included:

(a) Models of equipments and, where all equipment of a specific model do not have interchangeable parts, serial number of equipments covered.
(b) Explanation of any special notes.
(c) Explanation and instructions for using the list of common item descriptions.
(d) Explanation and instructions for using the list of attaching hardware.
(e) Explanation and instructions for using the parts list.
(f) Explanation and use of the list of manufacturers.

3.5.8.2 List of major components or major units. A list of major components or a list of major units in tabular form shall be included as follows:

(a) Column 1, PIN, RIC, or unit number. This column shall list the part or identifying number (PIN) (see 6.5.5) or unit number and allowance parts list (APL) for each major component, if available.
(b) Column 2, Name and APL or nomenclature. This column shall list the quantity of components.
(c) Column 3, Name or nomenclature. This column shall contain the approved nomenclature of the major components and shall be subdivided as follows:

    (1) Name of unit. This column shall list the approved name of the unit.
    (2) Designation. This column shall list the type designation of the unit.

(d) Column 4, Page number. This column shall list the number of first page of the parts listing for major unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.8.3 Parts list. The parts list shall be in tabular form in accordance with MIL-M-24784. When specified (see 6.2), the parts list shall be divided and arranged by major units in numerical sequence (for example, unit 1 with its parts, and so forth, shall precede unit 2 with its parts). All parts attached to the unit shall be listed first in alphanumerical order, followed by unit assemblies with parts and subassemblies with parts, also listed in alphanumerical order, and shall be arranged as follows:

Unit	1
(Cabinet parts)	1B1
	1C1
	1CR1
	1R1
	and so forth
Assembly	1A1
(Assembly parts)	1A1AT1
	1A1B1
	1A1C1
	1A1CR1
	1A1R1
	and so forth
Subassembly	1A1A1
(Subassembly parts)	1A1A1AT1
	1A1A1B1
	1A1A1C1
	1A1A1CR1
	1A1A1R1
	and so forth
Unit	2, and so forth

3.5.8.4 List of common item descriptions. This list shall include the description of all multiple use parts (over five applications). The description shall contain the same information specified in MIL-M-24784, Appendix E. Like parts should be grouped and arranged in alphabetical order. Item numbers shall be assigned consecutively, for example:

Item number	Description
1	CAPACITOR, FIXED, CERAMIC: DIELEC-TRIC 3PF, 500 VDCW; MIL type CCZ1UJ030C.
2	CAPACITOR, FIXED GLASS: DIELECTRIC 5100 PF, ± 1% 300 VDCW, mfr 86969, dwg 231B743H15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

Item number	Description
3	RESISTOR, FIXED, COMPOSITION: 3000 ohms ± 5% 1/2w; mfr 42384 dwg 4469D69
4	RESISTOR, FIXED, COMPOSITION: 4000 ohms ± 5% 1/2w; MIL type RC20GF402J.

3.5.8.5 List of attaching hardware. When specified (see 6.2), a list of standard attaching hardware shall be included which shows items of attaching hardware. For example:

Letter code	Name and description
A	SCREW, CAP, HEX HEAD, DRILLED HEAD, CRES: MS51100-8 1/4-28, UNF-2A, 1 in lq.
B	WASHER, FLAT, STEEL, FOUND, 0.750 in. ID, 0.312 in. OD, 0.066 in. thickness.

Items used fewer than five times need not be included in the list of attaching hardware providing the item is completely identified in the parts list, following the part identification that is being attached.

3.5.8.6 List of manufacturers. The list of manufacturers shall contain the names, addresses, and CAGE number of all manufacturers supplying items for the equipment as referenced in the parts list. The list shall be presented in numerical sequence by CAGE number. CAGE numbers shall be in accordance with cataloging handbook H4/H8.

3.5.8.7 Parts location illustrations. Illustrations shall be included to provide positive and rapid location of parts. Types of parts location illustrations include exploded views, when approved by the Government, engineering drawings and sectional views, printed-circuit boards, as applicable (see MIL-M-24784). (Suitable parts location illustrations located in other chapters of the manual may be referenced).

3.5.8.7.1 Criteria for illustrations. Items shall be called out on illustrations by call-out leader, index number, or grid coordinates. Standard attaching hardware items (such as nuts, bolts, washers, screws) need not be called out or illustrated, except when they are on exploded views or are referenced in a procedure. Multiple items of attaching hardware connecting parts together need not show every item; for example, if four screws and washers attach one part to

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

another, only one screw and washer need be shown, but all four screw holes on the part must be shown. Exploded views shall be supplied for units, subassemblies, and components designated Navy repairable but may be included in Chapter 6, "Repair and replacement", for parts-location purposes.

3.5.9 Chapter 8, Installation. Drawings and information concerning installation shall be provided in this chapter (see 6.2). The following type of information shall be included: site selection, or installation location guide lines (such as moisture precautions and maximum temperature allowed as appropriate), special tools and materials requirements, unpacking, and handling (if unusual procedures or precautions are required), preparation of foundations, mechanical assembly procedures, mounting instructions, bolting diagrams, safety precautions, grounding and bonding, clearances for access, ventilation, fluid cooling requirements, clearances for motion under shock, and recommendations for reduction of electrical and electromagnetic interference, and other interface requirements, as applicable. In addition, this chapter shall contain tests and test procedures required to demonstrate that the equipment after installation is capable of satisfying operational requirements. Also, it shall include information relating to the electromagnetic compatibility (EMC) measures taken in the original design or subsequently incorporated to maintain EMC integrity of the equipment at all times in its life cycle. The measures include, as a minimum shielding, filtering, grounding, bonding, and routing.

3.5.9.1 Installation drawings. Legible reproduction of appropriate installation control drawings in accordance with MIL-D-23140, shall consist of the following, as applicable.

(a) Drawing list.
(b) Block diagrams.
(c) Outline and installation drawing.
(d) Auxiliary cooling diagram.
(e) Auxiliary dry gas diagram.
(f) Cable running sheets.
(g) Summary list of installation material.
(h) RF transmission line diagram.
(i) Hydraulic fluid piping diagram.

3.5.9.2 Site or installation location information. Data shall contain information supplemental to the installation drawings. If all site information is contained on the installation drawings, reference shall be made to the applicable drawings by figure number.

3.5.9.3 Reference publications. When specified (see 6.2), reference shall be made to military-issue general publications required to complete the installation, when it is impractical to include such information.

3.5.9.4 Tools and materials required for installation. Include information supplemental to the summary list of installation material. If no supplemental information is required, reference the drawing by figure number.

3.5.9.5 Unpacking and repacking. Include information supplemental to the installation drawings regarding unpacking and repacking. Include step-by-step procedures to prevent damage to the equipment or injury to personnel. Supporting

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

illustrations shall be provided to clarify procedures. When packing for reshipment is required, step-by-step procedures for packing shall be included and illustrated. When packing is simply the reverse of unpacking, this fact need only be stated. Any special environmental conditions required for storage shall be provided. Instructions shall be included for items in the following categories.

(a) Depreservation procedures required at time of installation.
(b) Represervation packaging required prior to repacking for storage or shipment.
(c) Intricate mounting, blocking, or bracing.
(d) Special cushion inserts.
(e) Repairable items.
(f) Sensitive or fragile components.
(g) Items held in special cradles.
(h) Items furnished in reusable containers.
(i) Special environmental conditions required for storage.
(j) Special handling procedures required.
(k) Container storage or disposition instructions, as applicable.

The instructions shall be detailed to prevent handling damage to the equipment or injury to personnel. In addition, step-by-step procedural illustrations may be used to supplement the packing and handling instructions.

3.5.9.6 Preparation of foundations. Include information supplemental to the installation drawings. If all foundation preparation information is contained on the installation drawing, refer to the drawings by figure number.

3.5.9.7 Input requirements. A summary of the input data contained on the installation drawings shall be included. Parameters with tolerances should be included with each of the inputs listed. Examples of inputs are as follows:

(a) Power.
(b) Ventilation.
(c) Dry air (waveguide pressure).
(d) Ship gyro information.
(e) Fluid cooling.
(f) Steam.
(g) Freon.

3.5.9.8 Installation procedures. The following types of supplemental information which are not provided on the installation drawings shall be included or referenced.

(a) Instructions required to assemble units.
(b) Instructions required to mount units. Include bolting and bracing diagrams and data on shock mounts.
(c) Instructions for making electrical, plumbing, transmission line, and all other interface connections (external) to the equipment.
(d) Instructions for interconnecting units comprising the equipment.
(e) Servicing procedures, such as initial lubrication.
(f) Instructions for bonding and grounding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

3.5.9.9 Installation checkout. Step-by-step procedures shall be provided to demonstrate that the equipment operates correctly and within tolerances. These procedures shall provide for equipment checkout in three test phases as follows:

(a) Phase 1 - Installation inspection and pre-energizing procedures.
(b) Phase 2 - Turn-on and preliminary tests.
(c) Phase 3 - Installation verification test.

3.5.9.9.1 Phase 1 - Installation inspection and pre-energizing procedures. When specified (see 6.2), provide inspection procedures in the form of check lists to verify the following:

(a) That all units of the equipment and required auxiliary equipments have been installed and that their location and orientation is proper; that all cables, filters, antennas, waveguides, transmission lines, dehydrators, coolant lines, piping, and so forth, have been installed in accordance with plans and specifications; that continuity exists in all interconnections.
(b) That the test equipment listed in Chapter 1 is on board, operating satisfactorily, has been calibrated and has adequate storage in accordance with ST000-AB-GYD-010/PEETE.
(c) That the Allowance Parts List (APL) is on board, that the Coordinated Shipboard Allowance List (COSAL) includes the equipment data.
(d) That all field changes, shipalts, and mandatory retrofits have been accomplished.
(e) That all installation and reference standards are entered on the Installation Standards Summary Sheet.
(f) That all rotating devices are free from obstruction.
(g) That there is access to the equipment for maintenance.
(h) That all pre-energizing servicing procedures, including lubrication have been accomplished.
(i) That it is safe to turn on the equipment.

3.5.9.9.2 Phase 2 - Initial turn-on and preliminary test. Procedures shall be included for energizing the equipment for the first time. This may be accomplished by reference to the applicable portions of Chapter 2. Step-by-step procedures shall be included for testing the equipment electrical supply circuits including distribution panels, switches, breakers, relief valves, and interlocks. Procedures shall be included for testing piping, electrical cables, wire rope, stays, for proper installation of transmission lines and waveguides, hangar spacing, torquing of connectors, pressure testing, flow rates, standing wave ratio and attenuation checks, and so forth.

3.5.9.9.3 Phase 3 - Installation verification test. Complete instructions shall be included for testing the equipment in all modes of operation. Where applicable, refer to the scheduled performance tests in Chapter 4. Procedures shall cover checking gauges, meters, alarms, and other sensing devices for proper operation and calibration. The tests shall verify that all inputs are in tolerance. Where applicable, include voltage standing wave ratio (VSWR) and insertion loss tests to verify the proper installation of antenna-to-equipment waveguide runs; transducer impedance and source level checks to verify proper

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

installation of transducers, domes, and cables. Preliminary setup data shall be included in each procedure. When it is required that an alignment be accomplished prior to performing a test, the alignment shall be included or referenced in the procedure.

3.5.9.9.3.1 Test procedure. Testing procedures shall be presented in a logical order as follows:

(a) Energize the equipment.
(b) Test the first units (normally power supplies) which must be operating properly. When test results are within the required tolerance, include reference to the next logical test. Include a reference to the corrective maintenance or troubleshooting data to be used if test results are not within tolerances.

3.5.9.9.3.2 Installation standards summary sheet. The installation standards summary sheet shall provide spaces for recording the results of all installation verification tests and significant reference standard tests that should be made a matter of record for reference by the technician during trouble-shooting and for a standard to be re-established after overhaul (see figure 16-4). Each space shall be identified by the step or paragraph number which provides the instructions for accomplishment. Each space shall contain the respective unit of measurement (for example, amp., dB., or V.) When applicable, waveforms shall be included to show the points on the pattern where the measurement is to be taken. In addition, critical installation data shall be included, such as the length of the transmission line.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Quality control. Unless otherwise specified (see 6.2), the quality conformance inspection, Government inspection, validation, verification, technical manual quality assurance (TMQA) program reviews, technical manual evaluation records and rejection requirements shall be in accordance with MIL-M-24784.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. Unless otherwise specified (see 6.2), the packaging and preservation requirements for delivery of book plans, review draft copies, preliminary technical manuals, final reproducible copy, technical manuals, replenishment materials, changes and revisions shall be in accordance with MIL-M-24784.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The technical manuals prepared to this specification are intended to be used for installation, operation, maintenance, repair, and parts support of experimental, electronic and IC equipments and systems for NAVSEA and SPAWAR. The technical manual will be used as a training document in the classroom and as a source for on-the-job training.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification (or any TMCR referencing this specification).
(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1, 2.1.2 and 2.2).
(c) Applicable publication number, classification, and distribution statement (see 3.1).
(d) An outline or book plan manual must be specified whenever a technical manual is required for a new equipment or system (see 3.2a).
(e) Double column text must normally be specified. When increased effectiveness of presentation results, a single column format is also acceptable.
(f) A review draft copy (RDC) must always be specified for every new technical manual (see 3.2b). An RDC also must be specified for manual change or revision procurements (see 3.2f and 3.2g), unless changes to the technical manual have been pre-approved (TMDER, ECP, and so forth) by the Government.
(g) Specify the number of weeks required for Government review of technical manual deliverables.
(h) Specify a preliminary technical manual (PTM) when it is necessary to field equipment for test and evaluation, or when an extended period of use is required prior to Government verification (normally applies to complex equipment and systems only). (See 3.2c.)
(i) Final reproducible copy (see 3.2d).
(j) Supplements to manuals (see 3.2e) must be specified when:

(1) Classified information can be confined to the supplement manual such that its basic technical manual will be routed as "unclassified".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(2) It augments a technical manual to provide for a different model and can be justified as a cost effective method of promulgation.
(3) It can be justified as a practical method of promulgation.

(k) Changes must be specified only when they pertain to technical manual corrections resulting from a hardware change or modification. They may also be specified if it has been determined that significant omissions of technical data or information has been identified. Do not specify a change to correct minor or editorial corrections. When changes are justified on the above basis, the change package must include the correction of all outstanding temporary or interim changes and may include minor changes (see 3.2f). The change package must be developed in accordance with MIL-M-24784/1.
(l) Whenever the number of change pages is estimated to exceed approximately 25 percent of the total number of pages in the manual, an update revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(m) When the total number of pages requiring change exceed approximately 50 percent of the total number of pages in the manual, a complete revision must be specified (see 3.2g) and developed in accordance with MIL-M-24784/2.
(n) When quality assurance and management data items are required for effective management, selected items must be specified for delivery (see 3.2.3, 4.2, 6.4 and MIL-M-24784).

(1) TMQA program plan.
(2) Validation plan.
(3) Validation certification.
(4) Evaluation records.
(5) Verification plan.
(6) Verification incorporation certification.

(o) Warranty and guarantee information (see 3.5.2.1).
(p) Specify if circuit descriptions are required for experimental test (see 3.5a and 3.5.4.1).
(q) When the experimental equipment requires a Class B overhaul, a depot-level maintenance manual (TRS) is to be acquired in accordance with MIL-M-24784/8 (see 3.5.5).
(r) Specify if a scheduled maintenance action index is required for service test (see 3.5.5.2).
(s) Specify if reference is to be made to troubleshooting actions (see 3.5.5.4h).
(t) Specify if troubleshooting relay and lamp and protective device indexes are required (see 3.5.6.2.1.1, 3.5.6.2.1.2 and 3.5.6.2.1.3).
(u) Specify if maintenance turn-on and troubleshooting procedures are required (see 3.5.6.2.1.4 and 3.5.6.2.2).
(v) Specify if control, power distribution and troubleshooting dependency diagrams and flow charts are required (see 3.5.6.2.3, 3.5.6.2.6 and 3.5.6.2.8).
(w) Specify if repair data (Section II) is required (see 3.5.7.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

(x) Requirements for parts lists (see 3.5.8). Name and description of each part need not be furnished.
(y) Specify if attaching hardware data is required (see 3.5.8.5 and MIL-M-24784, Appendix E).
(z) When installation information is required, specify the drawings, site or installation location, and reference publications required (see 3.5.9).
(aa) Specify if installation, examination and pre-energizing procedures are required for installation (see 3.5.9.9.1).
(bb) When preservation, packing, and marking are other than as specified (see Section 5. PACKAGING).
(cc) For classified equipment, attach a DD Form 254 specifying the following:

(1) Security classification.
(2) Downgrading and declassification notification.
(3) Areas requiring security protection.

6.3 Technical manual acquisition. This specification (or a TMCR based on this specification) must be listed on the Contract Data Requirements List (DD Form 1423) in order to acquire the technical manuals described by this specification, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

6.4 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title
3.2.3	DI-M-2194	Manual, Technical; Quality Assurance Program Plan
3.2.3	DI-M-2195	Manual, Technical; Validation Plan
3.2.3	DI-M-2196	Manual, Technical; Validation Certification
3.2.3	DI-M-2197	Manual, Technical, Evaluation Record
3.2.3	DI-M-2198	Manual, Technical; Verification Plan
3.2.3	DI-M-2201	Technical Manual Verification Incorporation Certification

The above DID's were those cleared as of the date of this specification. The current issue of DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.5 Definitions. The words or phrases used throughout this specification must be as defined in MIL-M-24784 and the following.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

6.5.1 Commercial design. Equipment engineered and manufactured primarily for commercial purposes. For military applications, the acceptability of commercial off-the-shelf (COTS) manuals supporting the equipment or system can be established in accordance with MIL-M-24784/4 or this specification as directed by the Government.

6.5.2 Interim change. The SPAWAR method of promulgating rapid changes to a technical manual. The information required to amend, correct or modify a manual when emergency or urgent changes are necessary and there is insufficient time available to publish a permanent change. Interim changes are subject to replacement by a permanent change. (Interim changes are often referred to as temporary changes.)

6.5.3 Interior communications equipment. Equipment normally used for shipboard interior communication. These include navigation or related equipment designated interior communications (IC) equipment such as the following:

(a) Plotting tables.
(b) Deck reckoning indicators.
(c) Gyros and gyro amplifiers.

6.5.4 Major function. An essential functional operation which is fundamental to operation (as opposed to a circuit) of the equipment (for example, transmit, receive, display, hoist, and so forth).

6.5.5 Part or identifying number. An alphanumeric designator which identifies parts, items, or bulk materials, that are covered by a specification or standard. The number derived from a military specification such as type RWR74549R9FM; or a military standard such as MS 18272.

6.5.6 Repair, troubleshooting; maintenance concept. The planned concept by which the equipment, assemblies, units, components, modules, or piece parts are to be repaired or replaced by designated maintenance level activities (organizational, intermediate or depot).

6.5.7 Unit. A major building block for a set or system, consisting of a collection of basic parts, subassemblies, and assemblies packaged together as a physically independent entity. Refer to IEEE 200-75 for a detailed description.

6.6 Subject term (key word) listing.

Depot-level maintenance
Installation
Intermediate maintenance
Operation
Equipment maintenance
Organizational maintenance

Review activity:
Navy - EC

Preparing activity:
Navy - SH
(Project TMSS-N242-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

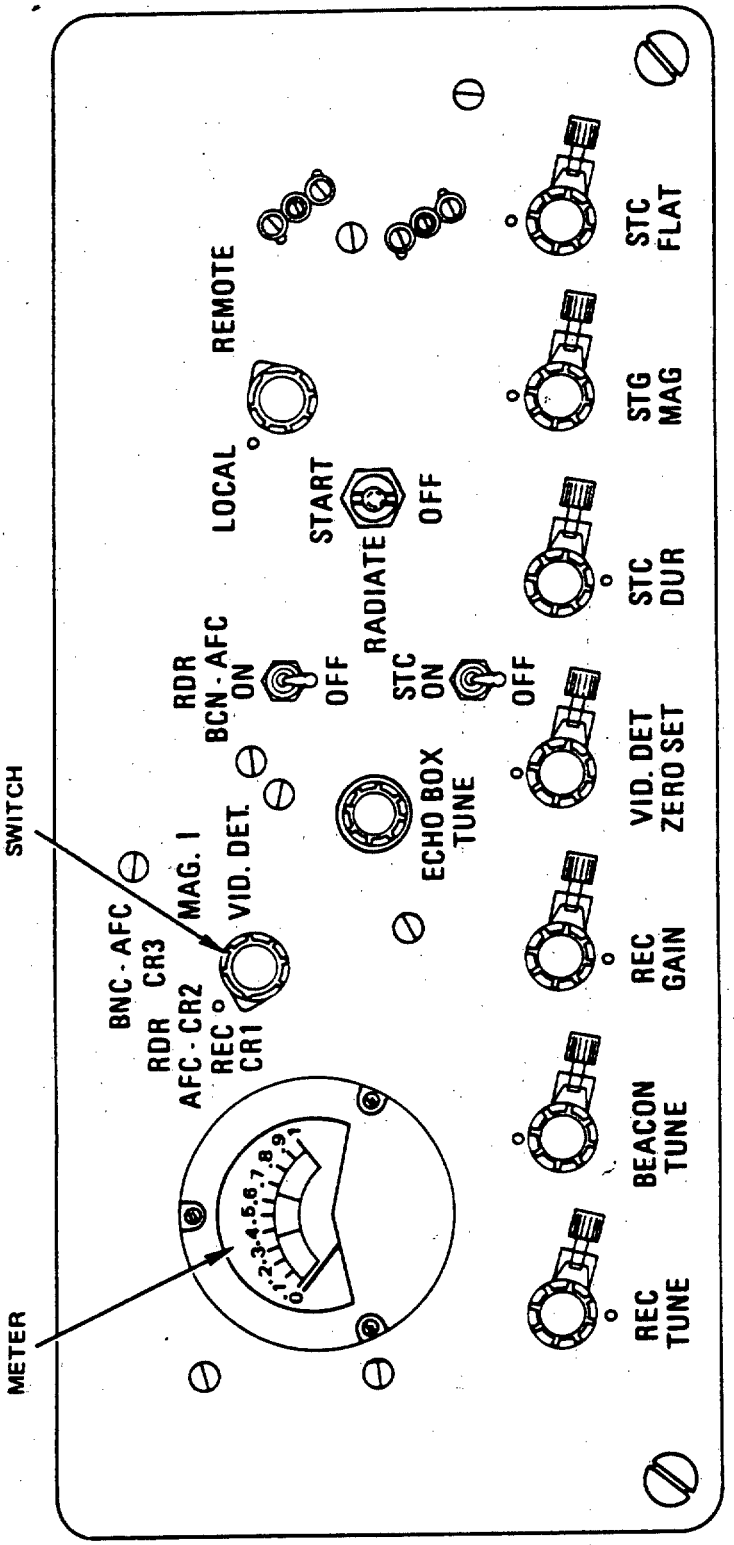


FIGURE 16-1. Equipment controls and indicators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

TABLE ZZ. MAINTENANCE TURN-ON PROCEDURE

STEP	OBSERVE	REFERENCE
1. Preliminary Procedure.		
a. Position the following switches on rear deck assembly 1A210A1 as indicated. Switch — POSITION POWER — OFF BATTLE SHORT — OFF STOW — BRAKES APPLY		
b. Position POWER switch on console, 1A220A20 (see figure 5-2) to OFF.		
c. Check to ensure that all chassis or subassemblies in the four compartments of electronic rack assembly, 1A70 are in the retracted position and all covers are secured.	Covers Secured	
d. Remove all obstructions from the rotational paths of the director main antenna assembly.	Director Clear	
2. Power off.		
a. At power control panel perform the following.		
(1) Check convenience lamp indicators.	Lighted	Schematic, figure 5-233
e. At track meter panel, 1A340-02, check COOLANT FAILURES lamp.	Extinguished (Depress RESET button if lamp is lighted)	Relay diagram, figure 5-77, SH 4(4B)

FIGURE 16-2. Maintenance turn-on procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

XYZ ROUTINE - PROGRAM LISTING

LOC	MEMORY CONTENTS	LABEL	ORD	ADR	MOD	CONSTANT	SCL	NOTES
01443	000330700		FRS	30700				
01447	015101457		TMI	01457				
01453	034706277		TRA	06277				
01457	000077632		GET	37632				
01463	034706403		ORG	06403				
			ORG	06103				
06103	001037632	A1	STO	TEMPR	1			SAVE INSERTED NUMBER
06107	035106123		TMI	A3				-/- NEGATIVE INSERT
06113	014077763	A2	GET	ONE				KEY FOR FIX RESET
06117	035035357		STO	KTYPF				TYPE OF RESET KEY
06123	000077760	A3	GET	ZERO				
06127	035037633		STO	TEMPR	2			CLEAR RESET /NRS/ KEY
06122	000077632		GET	TEMPR	1			
06137	004706147		TRA	SUB 1				GO TO RESET NUMBER SUBROUTINE
06143	000706327		TRA	A14				
06137	055437634	SUB1	STV*	TEMPR	3			ENTRANCE - RESET NUMBER SUBRTN
06153	034313700	A4	PRS	1				
06157	035106243		IMI	RE13				CHECK LAST BCD BIT FOR SIGN
06163	034313700	A5	PRS	1				
06167	035106213		TMI	**5				CHECK 2ND BCD BIT FOR SIGN
06173	034333600	A6	FRS	2				CHECK 3RD AND 4TH BITS
06177	002206177		TMI	OUT				
06203	034077633	A7	GET	TEMPR	2			TEMPORARY RESET KEY
06207	005737634		TRA	TEMPR	3			EXIT - RESET NUMBER SUBROUTINE
06213	005077766	A8	EXT	MAXNO				
06217	034333600	FRS	FRS	2				CHECK 3RD AND 4TH BITS
06223	002206277		TMI	OUT				
06227	044041030	A0	GET			020000000		KEY TO RESET 2
06233	005477633	A10	ADD	TEMPR	2			
06237	005737344		TRA	TEMPR	3			EXIT - RESET NUMBER ROUTINE
06243	034313700	RE13	PRS					
06247	035106303		TMI	RE3				CHECK 2ND BIT FOR SIGN
06253	034077766	A11	EXT	MAXNO				
06257	034333600		FRS	2				CHECK 3RD AND 4TH BITS
06263	001106277		TMI	OUT				
06267	034077762	A12	GET	HALF				KEY TO RESET 1

FIGURE 16-3. Coding instruction sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

RADIO RECEIVER R-XXX/URR

NAVSEA

INSTALLATION STANDARDS SUMMARY

Input Voltage_____Vac
Input Frequency_____Hz
(When reference standard tests are made)

Date_____
Serial Number_____
of Model_____
Installed in (ship or station)
_____
Length of transmission line
_____

Record on this summary sheet the test indications which have been obtained during the installation verification test.

Paragraph No.	Ref. Std.	Paragraph No.	Ref. Std.
8-10	a._____ Check	8-46	a._____ μV
			b._____ μV
8-21	a._____ Vdc		c._____ Check
	b._____ Vdc		d._____ μV
	c._____ Vdc		e._____ μV
	d._____ Vdc		f._____ μV
		8-51	a._____ Sec
8-33	a._____ Check		b._____ Check
	b._____ Check		c._____ Check
	c._____ Check		d._____ Hz
	d._____ Check		e._____ Hz
			f._____ Check
			g._____ Check

NOTE: This sheet may be reproduced locally to size of manual page.

FIGURE 16-4. Installation standards summary sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-M-24784/16(SH)	2. DOCUMENT DATE (YYMMDD) 940906

3. DOCUMENT TITLE
MANUAL, EXPERIMENTAL ELECTRONIC AND INTERIOR COMMUNICATION (IC) EQUIPMENT REQUIREMENTS

4. NATURE OF CHANGE (identity paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC) MR. MICKEY ANDER, SEA 04TD3 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: DSN: TPOC: 703-602-8701 8-332-8701
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03R42 2531 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:27Z
Check the source to verify that this is the current version before use.