FED. SUP CLASS
5320


(a)

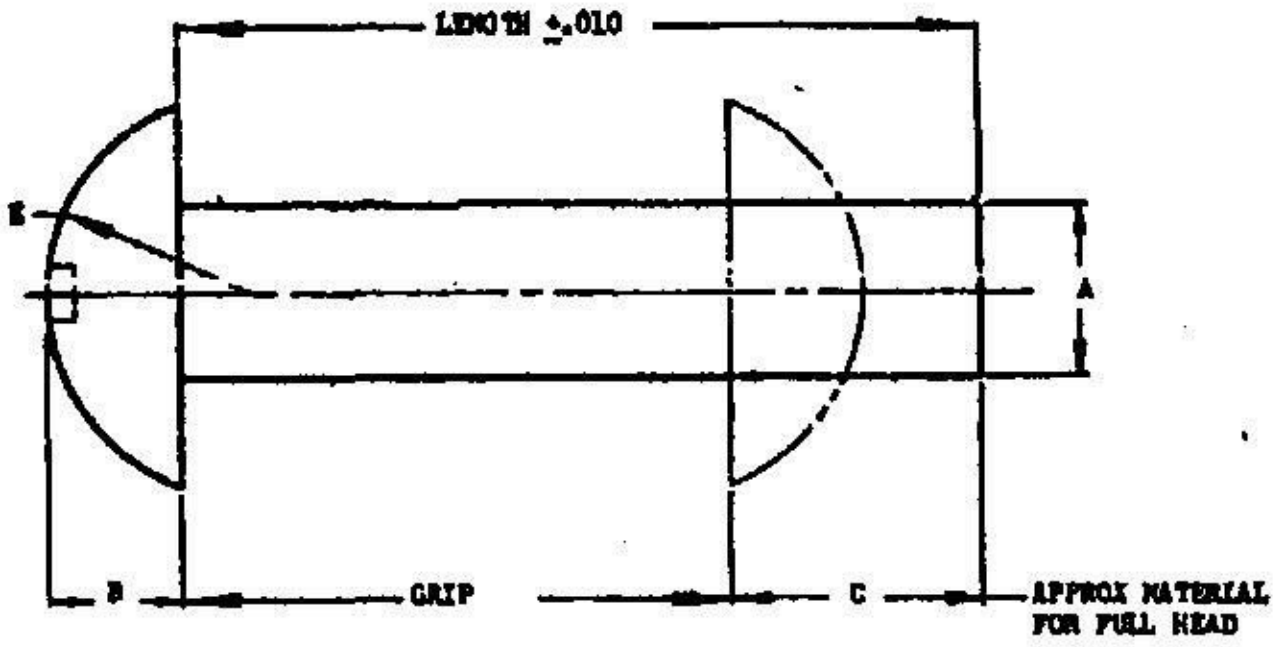

A DIA		RIVET SIZE NOM DIA	B	C	D DIA	E RAD
.063	+.003	.062	.047	.094	.109	.056
.094	-.004	.094	.071	.141	.166	.084
.125	±.004	.125	.094	.188	.219	.111
.156		.156	.117	.250	.273	.138
.188	+.004	.188	.140	.281	.327	.166
.250	-.006	.250	.188	.375	.438	.221
.313	+.004 -.008	.312	.234	.469	.546	.276
.375	+.005	.375	.281	.562	.656	.332
.438	-.010	.438	.328	.625	.765	.387

(a) RECESSED TRIANGLE FOR MILD STEEL RIVET ONLY.

MATERIAL: CARBON STEEL, C-1006 STEEL WIRE, SPECIFICATION QQ-W-409 OR SPECIFICATION QQ-S-633, FS1010, ANNEALED AFTER HEADING; CORROSION-RESISTANT STEEL, SPECIFICATION QQ-W-423, FS302 OR FS304, CONDITION A, ANNEALED AFTER HEADING BY HEATING AT 1,950°F TO 2,000°F FOR 5 MINUTES, FOLLOWED BY WATER QUENCH; MONEL, SPECIFICATION QQ-N-281, ANNEALED; COPPER, SPECIFICATION QQ-W-341 ANNEALED.

FINISH: ONLY WHEN SPECIFIED, CADMIUM PLATE IN ACCORDANCE WITH SPECIFICATION QQ-P-416; ZINC PLATE IN ACCORDANCE WITH SPECIFICATION QQ-Z-325.

SHEAR STRENGTH: MS20435F, 65,000 PSI TO 85,000 PSI.
MS20435M, 49,000 PSI TO 59,000 PSI.

RIVETS SHALL DRIVE COLD SATISFACTORILY WITH A FULL-HEAD FREE FROM CRACKS.

RIVETS MUST BE TRUE TO FORM, CONCENTRIC AND FREE FROM INJURIOUS SCALE, FINS, SEAMS, AND ALL OTHER INJURIOUS DEFECTS.

CADMIUM PLATED NICKEL-COPPER ALLOY (MONEL) RIVETS SHALL NOT BE USED IN APPLICATIONS WHERE THE AMBIENT TEMPERATURE IS ABOVE 400°F.

DIMENSIONS IN INCHES.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

INTERCHANGEABILITY RELATION WITH AN435 RIVETS: MS20435 RIVETS OF LIKE DASH NUMBERS ARE UNIVERSALLY, FUNCTIONALLY, AND DIMENSIONALLY INTERCHANGEABLE.

Ⓒ CANCELLED AFTER 08 APR. 1968. USE MS20613 AND MS20615.

APPROVED 7 Feb 58 REVISED Ⓐ 21 Mar 59 Ⓑ 23 Dec 60 Ⓒ 08 Apr 1968

P.A. AF 82 Other Cust Navy -AS	TITLE RIVET, ROUND HEAD, STEEL, MONEL AND COPPER	MILITARY STANDARD MS20435(ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN435	SHEET 1 OF 3

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS. 5320

CARBON STEEL DASH NO.	CARBON STEEL CADMIUM PLATED DASH NO.	CARBON STEEL ZINC PLATED DASH NO.	CRES DASH NO.	MONEL DASH NO.	MONEL CADMIUM PLATED DASH NO.	COPPER DASH NO.	LENGTH
1/16 RIVET DIAMETER, NOMINAL							
-2-2	-2C2	-2Z2	F2-2	M2-2	M2C2	CU2-2	.125
-2-3	-2C3	-2Z3	F2-3	M2-3	M2C3	CU2-3	.188
-2-4	-2C4	-2Z4	F2-4	M2-4	M2C4	CU2-4	.250
-2-5	-2C5	-2Z5	F2-5	M2-5	M2C5	CU2-5	.312
-2-6	-2C6	-2Z6	F2-6	M2-6	M2C6	CU2-6	.375
-2-7	-2C7	-2Z7	F2-7	M2-7	M2C7	CU2-7	.438
-2-8	-2C8	-2Z8	F2-8	M2-8	M2C8	CU2-8	.500
3/32 RIVET DIAMETER, NOMINAL							
-3-3	-3C3	-3Z3	F3-3	M3-3	M3C3	CU3-3	.188
-3-4	-3C4	-3Z4	F3-4	M3-4	M3C4	CU3-4	.250
-3-5	-3C5	-3Z5	F3-5	M3-5	M3C5	CU3-5	.312
-3-6	-3C6	-3Z6	F3-6	M3-6	M3C6	CU3-6	.375
-3-7	-3C7	-3Z7	F3-7	M3-7	M3C7	CU3-7	.438
-3-8	-3C8	-3Z8	F3-8	M3-8	M3C8	CU3-8	.500
-3-10	-3C10	-3Z10	F3-10	M3-10	M3C10	CU3-10	.625
-3-12	-3C12	-3Z12	F3-12	M3-12	M3C12	CU3-12	.750
-3-14	-3C14	-3Z14	F3-14	M3-14	M3C14	CU3-14	.875
-3-16	-3C16	-3Z16	F3-16	M3-16	M3C16	CU3-16	1.000
1/8 RIVET DIAMETER, NOMINAL							
-4-3	-4C3	-4Z3	F4-3	M4-3	M4C3		.188
-4-4	-4C4	-4Z4	F4-4	M4-4	M4C4	CU4-4	.250
-4-5	-4C5	-4Z5	F4-5	M4-5	M4C5	CU4-5	.312
-4-6	-4C6	-4Z6	F4-6	M4-6	M4C6	CU4-6	.375
-4-7	-4C7	-4Z7	F4-7	M4-7	M4C7	CU4-7	.438
-4-8	-4C8	-4Z8	F4-8	M4-8	M4C8	CU4-8	.500
-4-10	-4C10	-4Z10	F4-10	M4-10	M4C10	CU4-10	.625
-4-12	-4C12	-4Z12	F4-12	M4-12	M4C12	CU4-12	.750
-4-14	-4C14	-4Z14	F4-14	M4-14	M4C14	CU4-14	.875
-4-16	-4C16	-4Z16	F4-16	M4-16	M4C16	CU4-16	1.000
				M4-18	M4C18		1.125
-4-20	-4C20	-4Z20	F4-20		M4C20		1.250
-4-24	-4C24	-4Z24	F4-24				1.500
5/32 RIVET DIAMETER, NOMINAL							
-5-4	-5C4	-5Z4	F5-4	M5-4	M5C4		.250
-5-5	-5C5	-5Z5	F5-5	M5-5	M5C5		.312
-5-6	-5C6	-5Z6	F5-6	M5-6	M5C6	CU5-6	.375
-5-7	-5C7	-5Z7	F5-7	M5-7	M5C7	CU5-7	.438
-5-8	-5C8	-5Z8	F5-8	M5-8	M5C8	CU5-8	.500
-5-10	-5C10	-5Z10	F5-10	M5-10	M5C10	CU5-10	.625
-5-12	-5C12	-5Z12	F5-12	M5-12	M5C12	CU5-12	.750
-5-14	-5C14	-5Z14	F5-14	M5-14	M5C14	CU5-14	.875
-5-16	-5C16	-5Z16	F5-16	M5-16	M5C16	CU5-16	1.000
				M5-18	M5C18		1.125
-5-20	-5C20	-5Z20	F5-20				1.250
-5-24	-5C24	-5Z24	F5-24				1.500
-5-28	-5C28	-5Z28	F5-28				1.750
-5-32	-5C32	-5Z32	F5-32				2.000

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the USAF (Department of the Navy) and the ... and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

REVISED Ⓒ FOR CHANGES SEE SHEET 1.

APPROVED

P.A. AF 82 Other Cust Navy AS	TITLE RIVET, ROUND HEAD, STEEL, MONEL AND COPPER	MILITARY STANDARD MS20435(ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN435	SHEET 2 OF 3

DD FORM 672-1 (Limited coordination)

FED. SUP CLASS. 5320

CARBON STEEL		CARBON STEEL CADMIUM PLATED		CARBON STEEL ZINC PLATED		CRES		MONEL		MONEL CADIUM PLATED		COPPER		LENGTH
DASH NO.		DASH NO.		DASH NO.		DASH NO.		DASH NO.		DASH NO.		DASH NO.		
3/16 RIVET DIAMETER, NOMINAL														
-6-4		-6C4		-6Z4		F6-4		M6-4		M6C4				.250
-6-5		-6C5		-6Z5		F6-5		M6-5		M6C5				.312
-6-6		-6C6		-6Z6		F6-6		M6-6		M6C6		CU6-6		.375
-6-7		-6C7		-6Z7		F6-7		M6-7		M6C7		CU6-7		.438
-6-8		-6C8		-6Z8		F6-8		M6-8		M6C8		CU6-8		.500
-6-10		-6C10		-6Z10		F6-10		M6-10		M6C10		CU6-10		.625
-6-12		-6C12		-6Z12		F6-12		M6-12		M6C12		CU6-12		.750
-6-14		-6C14		-6Z14		F6-14		M6-14		M6C14		CU6-14		.875
-6-16		-6C16		-6Z16		F6-16		M6-16		M6C16		CU6-16		1.000
-6-18		-6C18		-6Z18		F6-18		M6-18		M6C18		CU6-18		1.125
-6-20		-6C20		-6Z20		F6-20		M6-20		M6C20		CU6-20		1.250
-6-22		-6C22		-6Z22		F6-22		M6-22		M6C22		CU6-22		1.375
-6-24		-6C24		-6Z24		F6-24		M6-24		M6C24		CU6-24		1.500
-6-28		-6C28		-6Z28		F6-28								1.750
-6-32		-6C32		-6Z32		F6-32								2.000
1/4 RIVET DIAMETER, NOMINAL														
-8-5		-8C5		-8Z5		F8-5		M8-5		M8C5				.312
-8-6		-8C6		-8Z6		F8-6		M8-6		M8C6				.375
-8-7		-8C7		-8Z7		F8-7		M8-7		M8C7				.438
-8-8		-8C8		-8Z8		F8-8		M8-8		M8C8				.500
-8-10		-8C10		-8Z10		F8-10		M8-10		M8C10				.625
-8-12		-8C12		-8Z12		F8-12		M8-12		M8C12				.750
-8-14		-8C14		-8Z14		F8-14		M8-14		M8C14				.875
-8-16		-8C16		-8Z16		F8-16		M8-16		M8C16				1.000
-8-20		-8C20		-8Z20		F8-20		M8-20		M8C20				1.250
-8-24		-8C24		-8Z24		F8-24		M8-24		M8C24				1.500
-8-28		-8C28		-8Z28		F8-28								1.750
-8-32		-8C32		-8Z32		F8-32								2.000
5/16 RIVET DIAMETER, NOMINAL														
-10-10		-10C10		-10Z10		F10-10								.625
-10-12		-10C12		-10Z12		F10-12								.750
-10-14		-10C14		-10Z14		F10-14								.875
-10-16		-10C16		-10Z16		F10-16								1.000
-10-20		-10C20		-10Z20		F10-20								1.250
-10-24		-10C24		-10Z24		F10-24								1.500
-10-28		-10C28		-10Z28		F10-28								1.750
-10-32		-10C32		-10Z32		F10-32								2.000
3/8 RIVET DIAMETER, NOMINAL														
-12-12		-12C12		-12Z12		F12-12								.750
-12-14		-12C14		-12Z14		F12-14								.875
-12-16		-12C16		-12Z16		F12-16								1.000
-12-20		-12C20		-12Z20		F12-20								1.250
-12-24		-12C24		-12Z24		F12-24								1.500
-12-28		-12C28		-12Z28		F12-28								1.750
-12-32		-12C32		-12Z32		F12-32								2.000
7/16 RIVET DIAMETER, NOMINAL														
-14-16		-14C16		-14Z16		F14-16								1.000
-14-20		-14C20		-14Z20		F14-20								1.250
-14-24		-14C24		-14Z24		F14-24								1.500
-14-28		-14C28		-14Z28		F14-28								1.750
-14-32		-14C32		-14Z32		F14-32								2.000

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission, to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

REVISED (C) FOR CHANGES SEE SHEET 1.

APPROVED

P.A. AF 82 Other Cust Navy-- AF	TITLE RIVET, ROUND HEAD, STEEL, MONEL AND COPPER	MILITARY STANDARD MS20435(ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN435	SHEET 3 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination)

PROBLEM HARD

MENT PRINTING OFFICE: 1968-301-518/5203